

SERIES 5010 Window Washing System IDEAL FOR WASHING BRIDGE WINDOWS

- Cost effective, compact, off-the-shelf window washing module
- High water pressure through adjustable nozzles giving total window spray coverage
- Heated water giving rapid dispersal of salt deposits
- Detergent injection to remove grease and oil residue
- Air purge facility to clear water line
- Optional anti-freeze mix for arctic operations
- High quality and proven components to give reliable and long-life service
- Flexible network controls



SYSTEMS FOR ALL SIZES OF VESSEL









SPECIFICATIONS

Supply capacity Up to 10 nozzles simultaneously, plus 10 with additional valves.

Nozzles Spray nozzles give a uniform flat spray delivering up to 2 litres/min at 5 bar.

Wash pump Maximum of 6 bar operating up to 80°C. The pump delivers up to

10 litres/min at 5 bar.

Storage tanks 60 litre water tank (fitted with low level indicator).

Motors 115v or 230v AC 1-phase 50/60Hz, Class F insulation and IP44 rating.

Solenoid valves 24, 115v or 230v AC 1-phase - pipe diameter to be specified.

Heater 115v or 230v AC 1-phase 3Kw - with adjustable thermostat

Weight and Dimensions 130W x 100H x 55D cm (approx excl. mountings) from 60kg (approx, dry).

Controls Cable incorporated into Wynn wiper control systems, or via a dedicated

wash system control panel.

HOW TO ORDER

Washing systems are custom made to meet your requirements. Please advise the following:


1 Quantity of spray nozzles required?


2 Voltage / Power supply?


3 Heated water mix: Yes / No


4 Detergent mix: Yes / No






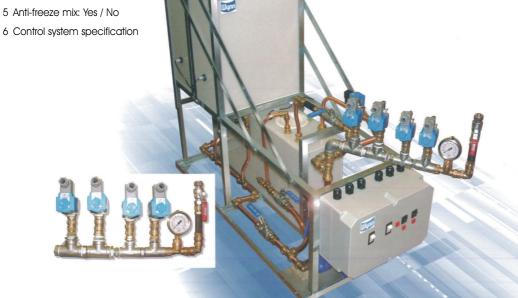









Series 5010

Window Washing System

> IDEAL FOR WASHING **BRIDGE WINDOWS**



B Hepworth & Co Ltd

4 Merse Road, North Moons Moat, Redditch Worcestershire B98 9HL UK

T +44 (0)1527 61243 F +44 (0)1527 66836 **E** marine@b-hepworth.com