



Wynn Marine Ltd

2-4 Merse Road, North Moons Moat, Redditch, Worcestershire B98 9HL, United Kingdom

Tel: +44 (0) 1527 61243, Fax: +44 (0) 1527 66836

Email: customerservice@b-hepworth.com, website www.b-hepworth.co.uk

Installation & Maintenance Manual

Type C Straight Line Wiper - Inside Motor

With

Series 6000 Network Control System

Issue 16

WARNING: A suitably qualified person should perform all installation and maintenance. All electrical wiring should be carried out in accordance with relevant regulations. Ensure all products are correctly earthed and all connections are made in accordance with the wiring diagram. Non-compliance may result in damage, malfunction or personal injury. Before commencing any installation or maintenance work, ensure that the electrical supply is disconnected.

Index

Safety Summary	1
Wiper Description	2
Wiper Installation	4
Wiper Installation Drawing	12
Wiper Installation Drawing	14
Wiper Installation Drawing	16
Wiper Installation Drawing Twin	18
Wiper Motor Installation	20
Parvalux Wiring Diagram	21
Wiper Fault Finding	22
Wiper Maintenance	25
Wiper Inspection and Renewal	27
Wiper Spares List	30
Wiper Spares Drawing	33
Wiper Spares Drawing Twin	34
Wiper Arm	36
Wiper Arm	37
Double Wiper Arm	38
Double Wiper Arm	39
SLW Part Number Calculator	42
Controller Description	44
Typical Bridge Layout	49
Controller Bus Connections	50
Bus Cable Installation	51
Controller Keypad Installation	53

Controller Keypad Operation	57
Controller Keypad Configurations	60
Controller Keypad User Programming	63
Controller Keypad Troubleshooting	67
Module Installation	71
Module Installation	74
Module Block Drawing	77
Module Electrical Drawing	78
Module Block Drawing	79
Module Electrical Drawing	80
Module Block Drawing	81
Module Electrical Drawing	82
Module Block Drawing	83
Module Electrical Drawing	84
Module Block Drawing	85
Module Electrical Drawing	86
Controller Troubleshooting	87
PSU Module Mechanical Drawing	88
Documentation	89

GENERAL INFORMATION AND SAFETY SUMMARY

As we will have no influence on the installation of complete windscreen wiper systems if installation is to be carried out by the customer, we are unable to accept liability for installation errors.

If you require any additional information or any special problems arise which the installation/maintenance instructions do not treat in sufficient detail please contact Customer Service at B. Hepworth and Co Ltd directly.

Safety Precautions

CAUTION! BEWARE OF INJURY!

BEFORE WORKING ON THE WIPER SYSTEM, OBSERVE THE FOLLOWING REMARKS WITHOUT FAIL!

Most wiper motors have a park setting, which permits them to default to the parked position if connected to the vehicle electrical system, even when the wiper is switched off. FOR THIS REASON, AT THIS POINT IN TIME, NEITHER MAY THE WIPER ARM BE MOUNTED, NOR MAY ANY PERSON HAVE HANDS, FINGERS, ETC ANYWHERE NEAR THE WIPER SYSTEM. Even small wiper motors can neither be braked nor stopped by hand.

NEVER REACH INTO THE AREA OF THE DRIVE BELT WHEN THE SYSTEM IS RUNNING!

When putting into service (i.e. when connecting the wiper motor to the vehicle electrical system, even if the wiper switch is in the off position), never leave any loose items such as screwdrivers in the area of the wiper system, as flying objects could lead to injury.

Please ensure the equipment is handled with care. Do not drop or bang the equipment down on a hard surface taking extra care around the area where the motor shaft is situated. Do not hammer the motor shaft when installing the equipment, as this will cause the motor gear plate to deform causing premature failure of the unit.

Wipers should be wrapped in protective material after installation to protect them from damage. Type of material depends on work done in the vicinity, for instance, if welding or grinding work needs to be done near the wipers then a fire resistant blanket should be used. If no welding or grinding work is required near the wipers then bubble is sufficient.

Introduction

The Windscreen Wiper system utilised is detailed on the following pages. The primary components that form the Windscreen Wiper System are the wiper case assembly, the wiper arm assemblies and the wiper blades.

TYPE C WIPER DESCRIPTION AND SPECIFICATION

The 'Type C' is a Heavy Duty Straight Line Wiper with an electric motor mounted internally. The wiper can be mounted either above or below the window. The motor can be positioned at either end simply by reversing the front cover of the wiper case.

All electric motors incorporate a worm reduction gearbox. Windings are to Class F insulation.

The DC motor option is suitable for single speed operation. Complies with the EMC Directive according to the following: EN 60945:2002

The AC 1-phase motor option is single speed operation. Complies with the EMC Directive according to the following: EN 60945:2002

The standard AC 3-phase motor option is for either 1 or 2 speed operation. Complies with the EMC Directive according to the following: EN 60945:2002

Motor Specifications

Motor	Type	Nominal Voltage	Full load current at 50/60 Hz	Fusing Value 50/60 Hz	Speed	Compass Safe Distance	Protection Rating
PM3M	Permanent Magnet	24V DC	4.5 A	6.0 A	1.4 m/s	2.4 m	IP54
PM3M (L)	Permanent Magnet	24V DC	4.5 A	6.0 A	0.7 m/s	2.4 m	IP54
PARV65	1 Phase Induction	115 V	2.3/2.6 A	2.5/3.15 A	1.4 m/s	0.5 m	IP20
PARV65L	1 Phase Induction	115 V	1.5/1.6 A	2.5/3.15 A	0.7 m/s	0.5 m	IP20
PARV64-T	1 Phase Induction	230 V	1.2/1.6 A	2.5/3.15 A	1.4 m/s	0.5 m	IP20
PARV64L	1 Phase Induction	230 V	0.75/0.95 A	1.0/1.6 A	0.7 m/s	0.5 m	IP20
PARV61	3 Phase Induction	115V AC	1.3/1.1 A	2.0/1.6 A	0.7/1.4 m/s	0.5 m	IP20
PARV62D+	3 Phase Induction	220V AC	0.6/0.6 A	1.0/1.0 A	0.7/1.4 m/s	0.5 m	IP20

For protection it is recommended that the wiper system have fuses fitted. The fuses will not blow in normal conditions, however if the wiper is jammed, then the fuses are designed to blow before the motor is damaged. Each wiper requires its own fuse. Fuse values shown above.

Compass safe distances, BSH (Germany) certified, have the values shown above. The distance quoted is the maximum figure for '*Magnet-Regelkompass*'.

Drive shaft lengths are optional. These are available in standard and gas tight versions. The standard length is 84 mm. Other lengths available are 35mm, 140mm, 200mm and 220mm. The Certificate of Conformity will advise which option has been fitted.

Spray nozzles & water connections

A fresh water supply can be plumbed directly to the wiper into a 6mm overall diameter compression fitting. On stroke lengths below 1015mm, 1 nozzle is fitted, above 1015mm, 2 nozzles are fitted at $\frac{1}{4}$ stroke + 137mm from either end. The installer needs to provide pressurised water supply and the interconnecting plumbing. When the wash option is installed, the maximum pressure for the system is 8 bar or 118 PSI and the minimum pressure for adequate spray reach is 1 bar or 15 PSI. Example flow rates for a single spray jet are shown below.

Water System Pressure And Flow Rates

Pressure		Flow rate	
Bar	Psi	Litres/min	Gallons/min
1.0	15	0.95	0.20
1.5	22	1.20	0.25
2.0	29	1.40	0.30
3.0	44	1.75	0.40

De-icing Heaters

Optional de-icing heaters may be fitted inside the wiper case to ensure effective operation in cold conditions. Standard cable length is 2M. Optional lengths are 5M, 10M, 15M and 20M. Power consumption is according to the wiper stroke length, shown below.

Heater Power Ratings – Single Wipers

STROKE (mm)	STROKE (inch)	HEATER SIZE	WATTS (24VDC)	STROKE (mm)	STROKE (inch)	HEATER SIZE	WATTS (24VDC)
305 up to 430	12 up to 17	1	97	1500 up to 1800	59 up to 71	8	390 (186)
457 up to 735	18 up to 29	2	135	1930 up to 2100	76 up to 83	10	485 (150)
760 up to 1095	30 up to 42	4	211	2260	89	12	574 (123)
1118 up to 1450	43 up to 57	6	301 (238)				

Quoted Power is for nominal 115 or 230 Volts (bracketed values are for 24 Volts). For stroke lengths up to 1065 mm, power ratings are the same for all voltages.

Heater Power Ratings – Twin Wipers

OVERALL STROKE (mm)	STROKE (inch)	HEATER SIZE	WATTS (24VDC)	OVERALL STROKE (mm)	STROKE (inch)	HEATER SIZE	WATTS (24VDC)
585 up to 685	2 x 12 – 2 x 15	2	135	1855 up to 2165	2 x 37 – 2 x 43	10	485 (150)
735 up to 1042	2 x 16 – 2 x 21	4	211	2210 up to 2565	2 x 44 – 2 x 51	12	574 (123)
1091 up to 1445	2 x 22 – 2 x 29	6	301 (238)	2645 and above	2x 53 – 2 x 89	14	663 (106)
1495 up to 1805	2 x 30 – 2 x 36	8	390 (186)				

Quoted Power is for nominal 115 or 230 Volts (bracketed values are for 24 Volts). For stroke lengths up to 1041 mm, power ratings are the same for all voltages.

TYPE C WIPER INSTALLATION




CAUTION: Ensure that the correct wiper, blade and arms are selected for each window.


CAUTION: Before drilling, ensure that there are no obstructions / hazards at the chosen mounting position. The main frame should be mounted on a flat surface that will not bend or twist the casing, as this will prevent correct operation of the wiper.

CAUTION: Where more than one wiper unit is to be mounted close together, allow a distance of 70mm minimum between the wiper units.

Stud or Bracket Mounting

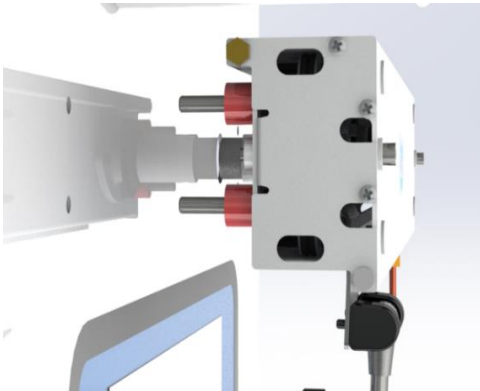

Stud Mounting

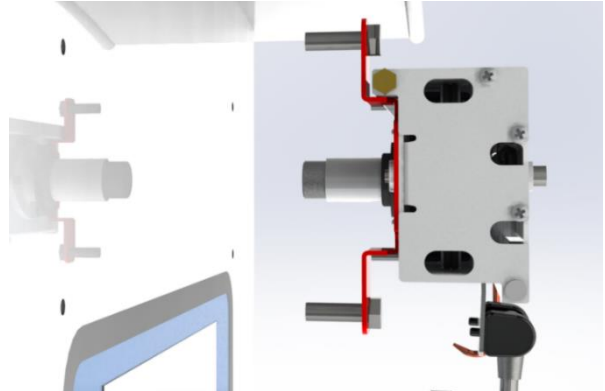

Bracket Mounting

1. Locate the self-adhesive template in the correct mounting position on the outside of bulkhead (stud mounting only).

NOTE: For motors mounted at the opposite end, the template should be inverted.

2. Drill the wiper 2 off fixing holes (11 mm diameter) and the drive shaft housing hole (57mm diameter).
3. Detach the front cover from main unit. Hold the back casing in the required position and mark-out the remaining fixing holes, or calculate their position from the drawing i.e. stroke length plus 266 mm.
4. Drill the remaining wiper fixing & cable holes for the heater and park sensor, ensuring that all holes are circular and carefully de-burred. Treat bare metal to prevent corrosion.
5. Fit the wiper case into position and secure with M10 bolts. Ensure that the bolts are sealed where they pass through the bulkhead.
6. Push the drive shaft seals into place. It is advisable to use a suitable sealant to prevent water ingress.
7. Using the supplied M6 x 10mm screws, secure the wiper arm to the carriage plate.




CAUTION: Ensure the correct length screws are used, as supplied. Longer screws will cause the carriage assembly to jam.

8. Bolt the front cover to the back case using the 2 off M8 bolts fitted.



CAUTION: Do not overtighten the cover bolts. There should be 3mm clearance between arm mounting plate and inside of wiper cover.



9. If necessary, slacken the screws on the wiper blade attachment clip, move the blade up or down for optimum position and then retighten screws.
10. Move the wiper arm/blade assembly over its full stroke and check that there is no restriction to movement (the motor will offer some resistance, but should not jam the wiper). Investigate and rectify any restrictions. If necessary adjust the wiper blade up or down on the arm to avoid the window frame.
11. Pass the cables through the bulkhead, leaving sufficient spare cable to allow the front cover to be lifted away from the rear case during the maintenance period. Ensure the wiper is correctly earthed.

NOTE: If a heater is fitted pass the heater cable through the bulkhead, leaving a loop as required, and seal.


12. Ensure that wherever the cable passes through the bulkhead a suitable cable gland or seal is used to prevent water ingress and cable chaffing.
13. Put a small amount of grease on drive shaft body.



14. Slide motor onto the drive shaft making sure the drive gear on the motor fully engages with drive gear on drive shaft.



Universal Carrier & Bracket Mounting

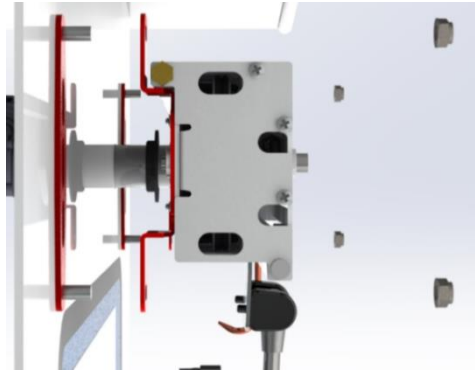

Universal Bracket Mounting

1. Carefully mark the position of the drive shaft housing hole and 2 (3 for longer wipers) universal carrier plates.
2. Drill the drive shaft housing hole (57mm diameter).
3. Prepare the bulkhead and universal carrier plates carefully and weld the 2 (or 3 for longer wipers) universal mounting brackets into position. Treat bare metal to prevent corrosion.
4. Drill the remaining wiper fixing & cable holes for the heater and park sensor, ensuring that all holes are circular and carefully de-burred. Treat bare metal to prevent corrosion.
5. Fit the wiper case into position on the Universal Carrier studs and secure with supplied M10 spring washers, M10 flat washers and M10 nuts.
6. Push the drive shaft seals into place. It is advisable to use a suitable sealant to prevent water ingress.
7. Using the supplied M6 x 10mm screws, secure the wiper arm to the carriage plate.




CAUTION: Ensure the correct length screws are used, as supplied. Longer screws will cause the carriage assembly to jam.

8. Bolt the front cover to the back case using the 2 off M8 bolts fitted.



CAUTION: Do not overtighten the cover bolts. There should be 3mm clearance between arm mounting plate and inside of wiper cover.



9. If necessary, slacken the screws on the wiper blade attachment clip, move the blade up or down for optimum position and then retighten screws.
10. Move the wiper arm/blade assembly over its full stroke and check that there is no restriction to movement (the motor will offer some resistance, but should not jam the wiper). Investigate and rectify any restrictions. If necessary adjust the wiper blade up or down on the arm to avoid the window frame.
11. Pass the cables through the bulkhead, leaving sufficient spare cable to allow the front assembly to be lifted away from the rear case during the maintenance period. Ensure the wiper is correctly earthed.

NOTE: If a heater is fitted pass the heater cable through the bulkhead, leaving a loop as required, and seal.


12. Ensure that wherever the cable passes through the bulkhead a suitable cable gland or seal is used to prevent water ingress and cable chaffing.
13. Put a small amount of grease on drive shaft body.



14. Slide motor onto the drive shaft making sure the drive gear on the motor fully engages with drive gear on drive shaft.




Bracket Mounting – Quick Release Arms

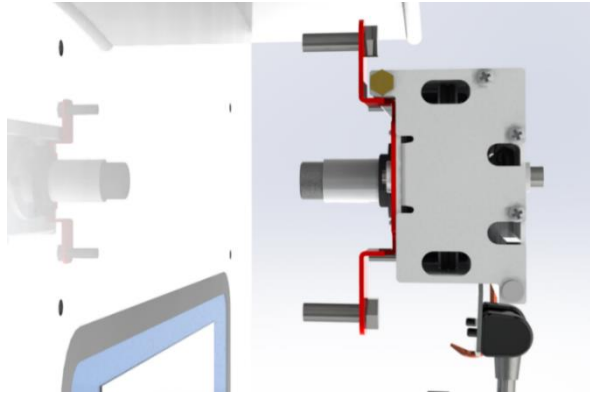


Bracket Mounting

1. Mark out and drill the 4 (6 for longer wiper units) off fixing holes (11 mm diameter) and the drive shaft housing hole (57mm diameter).
2. Mark out and drill the cable holes for the heater and park sensor, ensuring that all holes are circular and carefully de-burred. Treat bare metal to prevent corrosion.
3. The wiper unit should be supplied with the arm mounting plate (4) already fitted. If it is not fitted, remove 2 x ¼ UNF Thin Nuts (2) and 2 x M6 washers (3) from the pivot block threads and remove the wiper arm sub assembly (5) from the arm mounting plate (4). Fit the arm mounting plate (4) to the wiper unit before installing the wiper unit using the supplied M6 x 10mm screws.

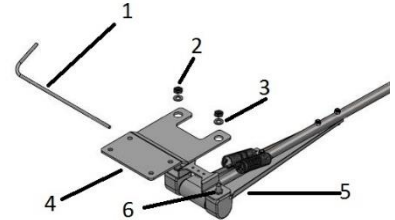


CAUTION: Ensure the correct length screws are used, as supplied. Longer screws will cause the carriage assembly to jam.

4. Fit the wiper blade to the wiper arm sub assembly (5), ensuring that the captive end of the wiper blade is at the top.
5. Bolt the front cover to the back case using the 2 off M8 bolts fitted.



CAUTION: Do not overtighten the cover bolts. There should be 3mm clearance between arm mounting plate and inside of wiper cover.

6. Fit the wiper case into position and secure with M10 bolts. Ensure that the bolts are sealed where they pass through the bulkhead.
7. Push the drive shaft seals into place. It is advisable to use a suitable sealant to prevent water ingress.
8. Fit the wiper arm sub assembly (5) to the arm mounting plate (4) ensuring that the wiper arm sub assembly pivot block nuts (6) sit inside the holes in the arm mounting plate (4). Refit the 2 x M6 washers (3) and 2 x ¼ UNF Thin Nuts (2) to the pivot block threads and tighten.
9. Gently lift the wiper arm away from the window and remove the spring retaining pin (1). Keep safe for future use.
10. Pass the cables through the bulkhead, leaving sufficient spare cable to allow the front cover to be lifted away from the rear case during the maintenance period. Ensure the wiper is correctly earthed.



NOTE: If a heater is fitted pass the heater cable through the bulkhead, leaving a loop as required, and seal.


11. Ensure that wherever the cable passes through the bulkhead a suitable cable gland or seal is used to prevent water ingress and cable chaffing.
12. Put a small amount of grease on drive shaft body.



13. Slide motor onto the drive shaft making sure the drive gear on the motor fully engages with drive gear on drive shaft.




Universal Carrier & Bracket Mounting – Quick Release Arms

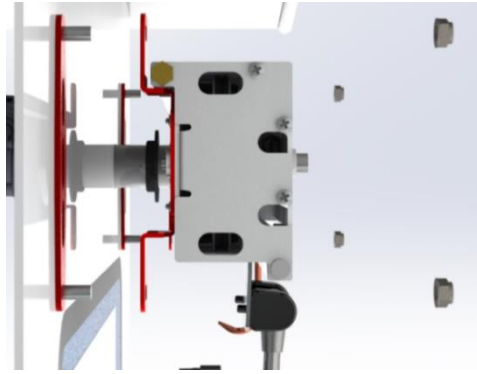

Universal Bracket Mounting

1. Carefully mark the position of the drive shaft housing hole and 2 (3 for longer wipers) universal carrier plates.
2. Drill the drive shaft housing hole (57mm diameter).
3. Prepare the bulkhead and universal carrier plates carefully and weld the 2 (or 3 for longer wipers) universal mounting brackets into position. Treat bare metal to prevent corrosion.
4. Mark out and drill the cable holes for the heater and park sensor, ensuring that all holes are circular and carefully de-burred. Treat bare metal to prevent corrosion.
5. The wiper unit should be supplied with the arm mounting plate (4) already fitted. If it is not fitted, remove 2 x ¼ UNF Thin Nuts (2) and 2 x M6 washers (3) from the pivot block threads and remove the wiper arm sub assembly (5) from the arm mounting plate (4). Fit the arm mounting plate (4) to the wiper unit before installing the wiper unit using the supplied M6 x 10mm screws.

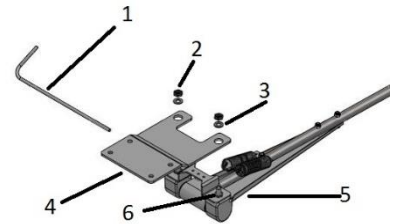


CAUTION: Ensure the correct length screws are used, as supplied. Longer screws will cause the carriage assembly to jam.

6. Fit the wiper blade to the wiper arm sub assembly (5), ensuring that the captive end of the wiper blade is at the top.
7. Bolt the front cover to the back case using the 2 off M8 bolts fitted.




CAUTION: Do not overtighten the cover bolts. There should be 3mm clearance between arm mounting plate and inside of wiper cover.

8. Fit the wiper case into position on the Universal Carrier studs and secure with supplied M10 spring washers, M10 flat washers and M10 nuts.
9. Push the drive shaft seals into place. It is advisable to use a suitable sealant to prevent water ingress.



10. Fit the wiper arm sub assembly (5) to the arm mounting plate (4) ensuring that the wiper arm sub assembly pivot block nuts (6) sit inside the holes in the arm mounting plate (4). Refit the 2 x M6 washers (3) and 2 x ¼ UNF Thin Nuts (2) to the pivot block threads and tighten.
11. Gently lift the wiper arm away from the window and remove the spring retaining pin (1). Keep safe for future use.
12. Pass the cables through the bulkhead, leaving sufficient spare cable to allow the front cover to be lifted away from the rear case during the maintenance period. Ensure the wiper is correctly earthed.




NOTE: If a heater is fitted pass the heater cable through the bulkhead, leaving a loop as required, and seal.

13. Ensure that wherever the cable passes through the bulkhead a suitable cable gland or seal is used to prevent water ingress and cable chaffing.
14. Put a small amount of grease on drive shaft body.



15. Slide motor onto the drive shaft making sure the drive gear on the motor fully engages with drive gear on drive shaft.




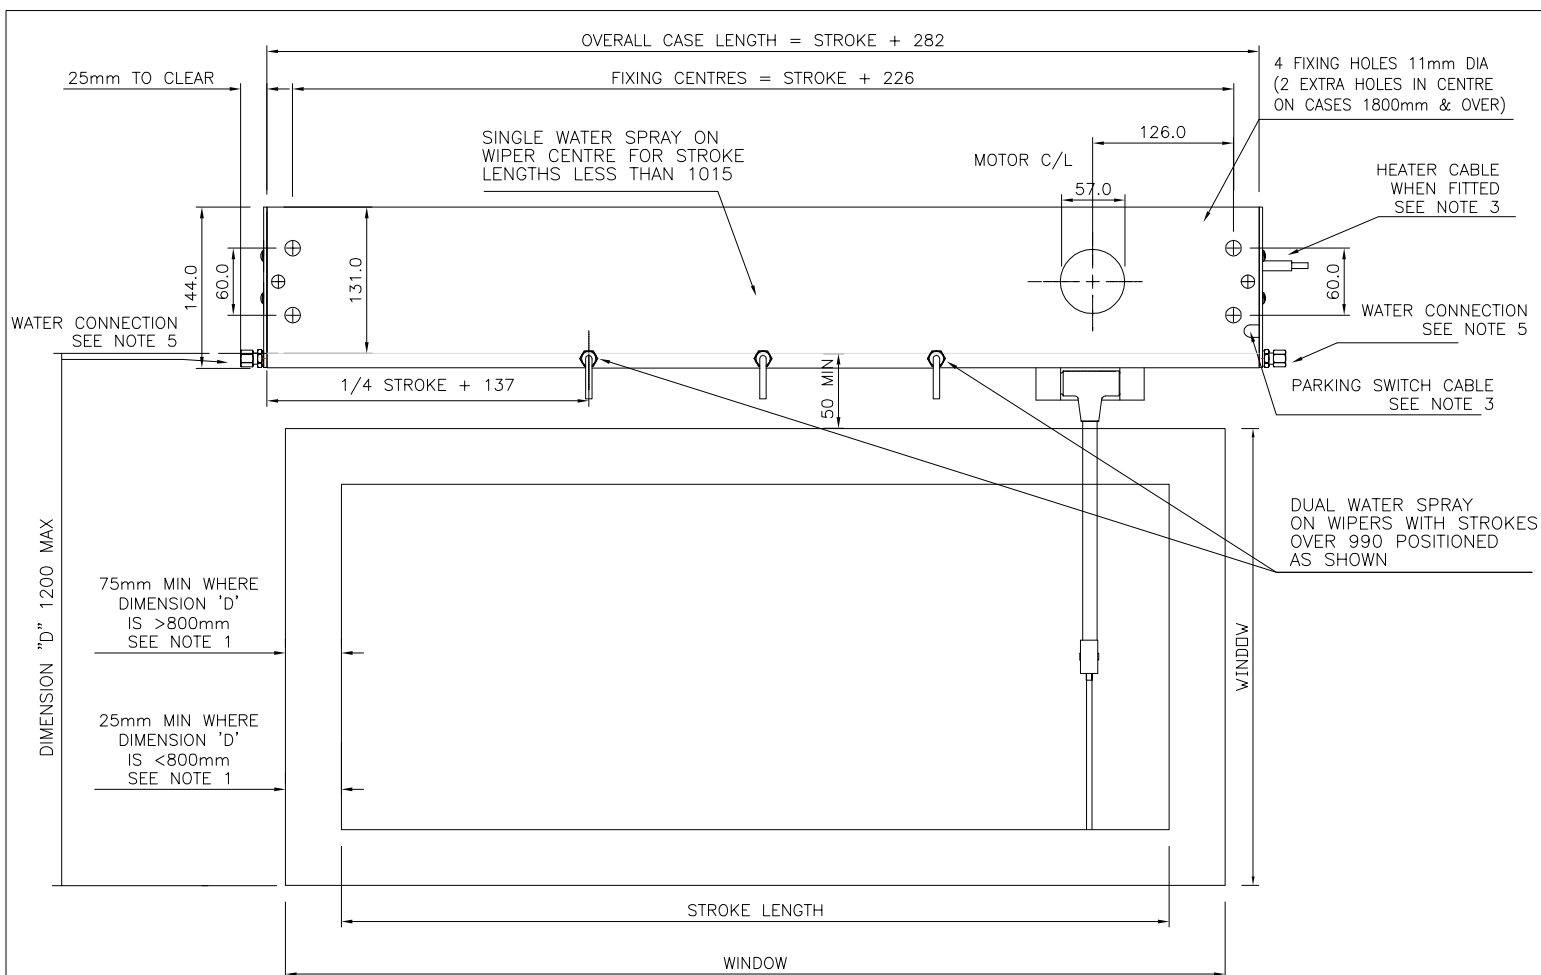

NOTES

1. THESE MINIMUM DIMENSIONS ARE LIMITED BY THE SIZE OF THE CORNER RADII ON THE WINDOW.
2. THE BLADE ARM MAY BE CRANKED WHERE DIMENSION "R" IS GREATER THAN 75.
3. OPTIONAL HEATER AND PARKING SWITCH STANDARD CABLE LENGTH 2 METRES. PARKING SWITCH POSITIONED AT MOTOR END WHEN FITTED.
4. THE HEATER AND PARK SWITCH CABLING TO RUN THROUGH THE BULKHEAD.
5. THE WATER CONNECTION BLANKING PLUG CAN BE FITTED AT EITHER END.
6. RIGID WIPER BLADE LENGTHS RANGE FROM 300 TO 800 AND ARTICULATED WIPER BLADE LENGTHS RANGE FROM 500 TO 1000 BOTH IN 50 INCREMENTS.
7. SEE MANUAL HEATER POWER RATINGS TABLE FOR STROKE OPTIONS AND HEATER DETAILS.
8. THE MOTOR CAN BE POSITIONED RADIALLY THROUGH 360 DEGREES AROUND THE DRIVE SHAFT CENTRE-LINE TO SUIT THE INSTALLATION. ENSURE THAT THE ACCESS SPACE AROUND THE MOTOR SHOWN ON THE DRAWING IS MAINTAINED.

ALL DIMENSIONS IN MM FOR REFERENCE ONLY

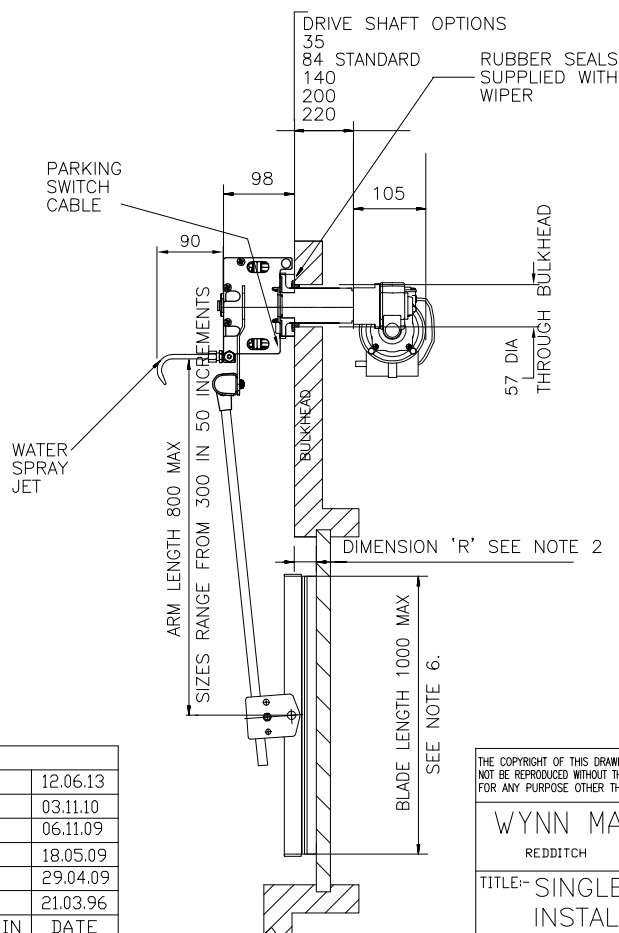


CAD FILENAME+DIRECTORY	M:\DRAW\1588\1588-01-CCOVER						
3rd ANGLE PRO.						6	12.06.13
						5	03.11.10
						4	06.11.09
			9	25.10.18	3		18.05.09
			8	19.01.16	2		29.04.09
			7	25.11.13	1		21.03.96
MAT'L:-	ISS.	DIN	DATE	ISS.	DIN	DATE	
FINISH:-	SCALE:-	NTS	DRAWN:-	DD	CHKD:-	CHANGED:-	

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.

WYNN MARINE LIMITED
REDDITCH ENGLAND

TITLE:- SINGLE TYPE C
INSTALLATION DRG.


DRAWING No. 1588-01-CCOVER

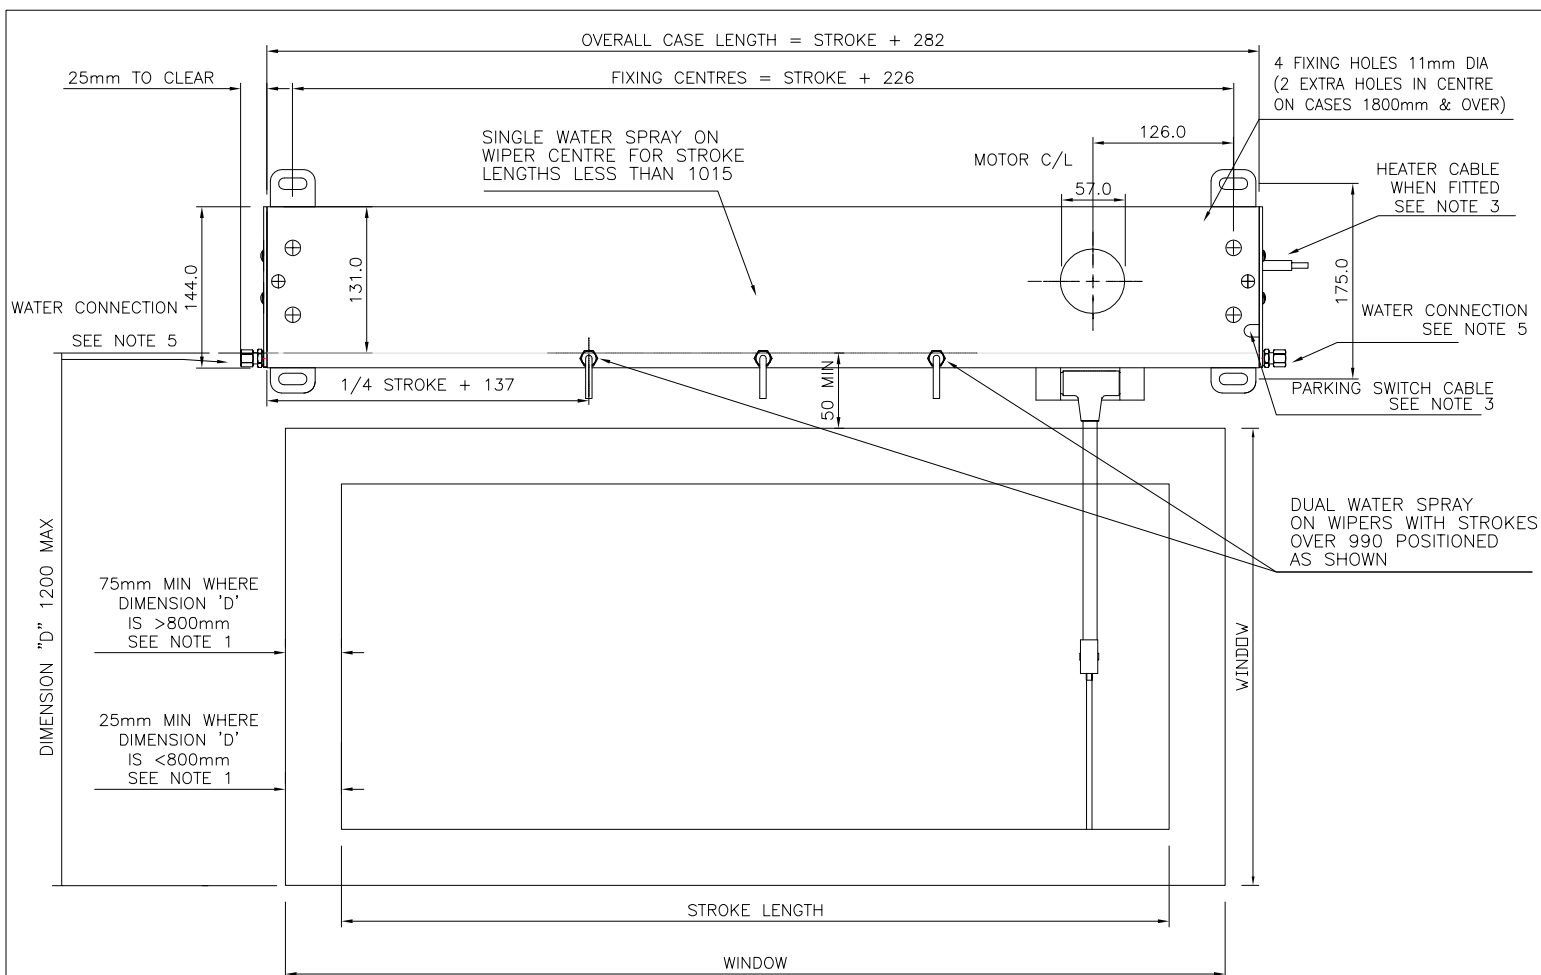

NOTES

- THESE MINIMUM DIMENSIONS ARE LIMITED BY THE SIZE OF THE CORNER RADII ON THE WINDOW.
- THE BLADE ARM MAY BE CRANKED WHERE DIMENSION "R" IS GREATER THAN 75.
- OPTIONAL HEATER AND PARKING SWITCH STANDARD CABLE LENGTH 2 METRES. PARKING SWITCH POSITIONED AT MOTOR END WHEN FITTED.
- THE HEATER AND PARK SWITCH CABLING TO RUN THROUGH THE BULKHEAD.
- THE WATER CONNECTION BLANKING PLUG CAN BE FITTED AT EITHER END.
- RIGID WIPER BLADE LENGTHS RANGE FROM 300 TO 800 AND ARTICULATED WIPER BLADE LENGTHS RANGE FROM 500 TO 1000 BOTH IN 50 INCREMENTS.
- SEE MANUAL HEATER POWER RATINGS TABLE FOR STROKE OPTIONS AND HEATER DETAILS.
- THE MOTOR CAN BE POSITIONED RADIALLY THROUGH 360 DEGREES AROUND THE DRIVE SHAFT CENTRE-LINE TO SUIT THE INSTALLATION. ENSURE THAT THE ACCESS SPACE AROUND THE MOTOR SHOWN ON THE DRAWING IS MAINTAINED.

ALL DIMENSIONS IN MM FOR REFERENCE ONLY

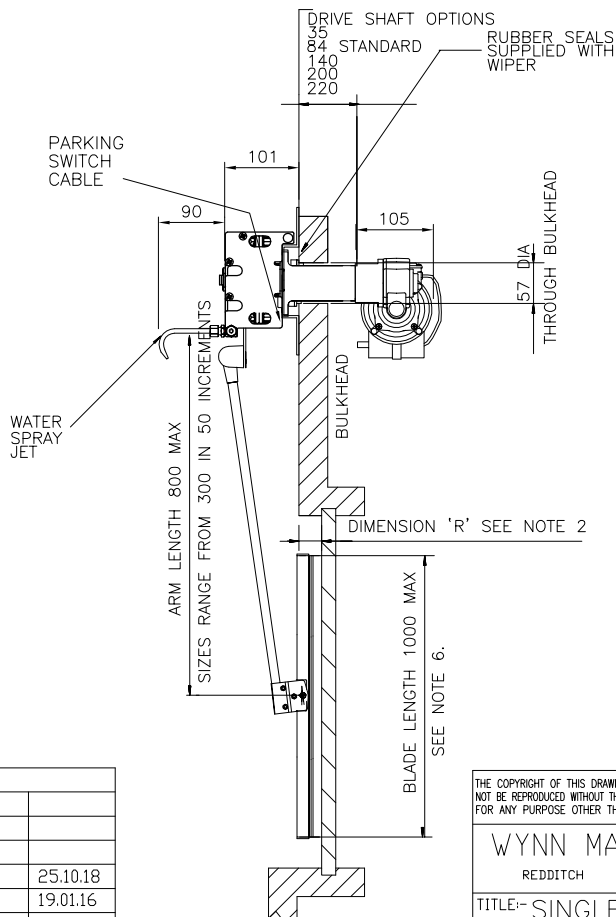


CAD FILENAME+DIRECTORY	M:\DRAW\1588\1588-01-BKT						
3rd ANGLE PRO.							
TOLERANCES UNLESS OTHERWISE STATED DECIMAL DIMS. TO 2 PLACES ± 0.1mm DECIMAL DIMS. TO 1 PLACE ± 0.25mm NO DECIMAL PLACES ± 0.5mm ANGLES ± 1°							
						3	25.10.18
						2	19.01.16
						1	25.07.14
MAT'L:-	ISS.	DIN	DATE	ISS.	DIN	DATE	ISS.
FINISH:-	SCALE:-	NTS	DRAWN:-	DD	CHKD:-	CHANGED:-	DATE

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.

WYNN MARINE LIMITED
REDDITCH ENGLAND

TITLE:- SINGLE TYPE C
INSTALLATION DRG.

DRAWING No. 1588-01-BKT

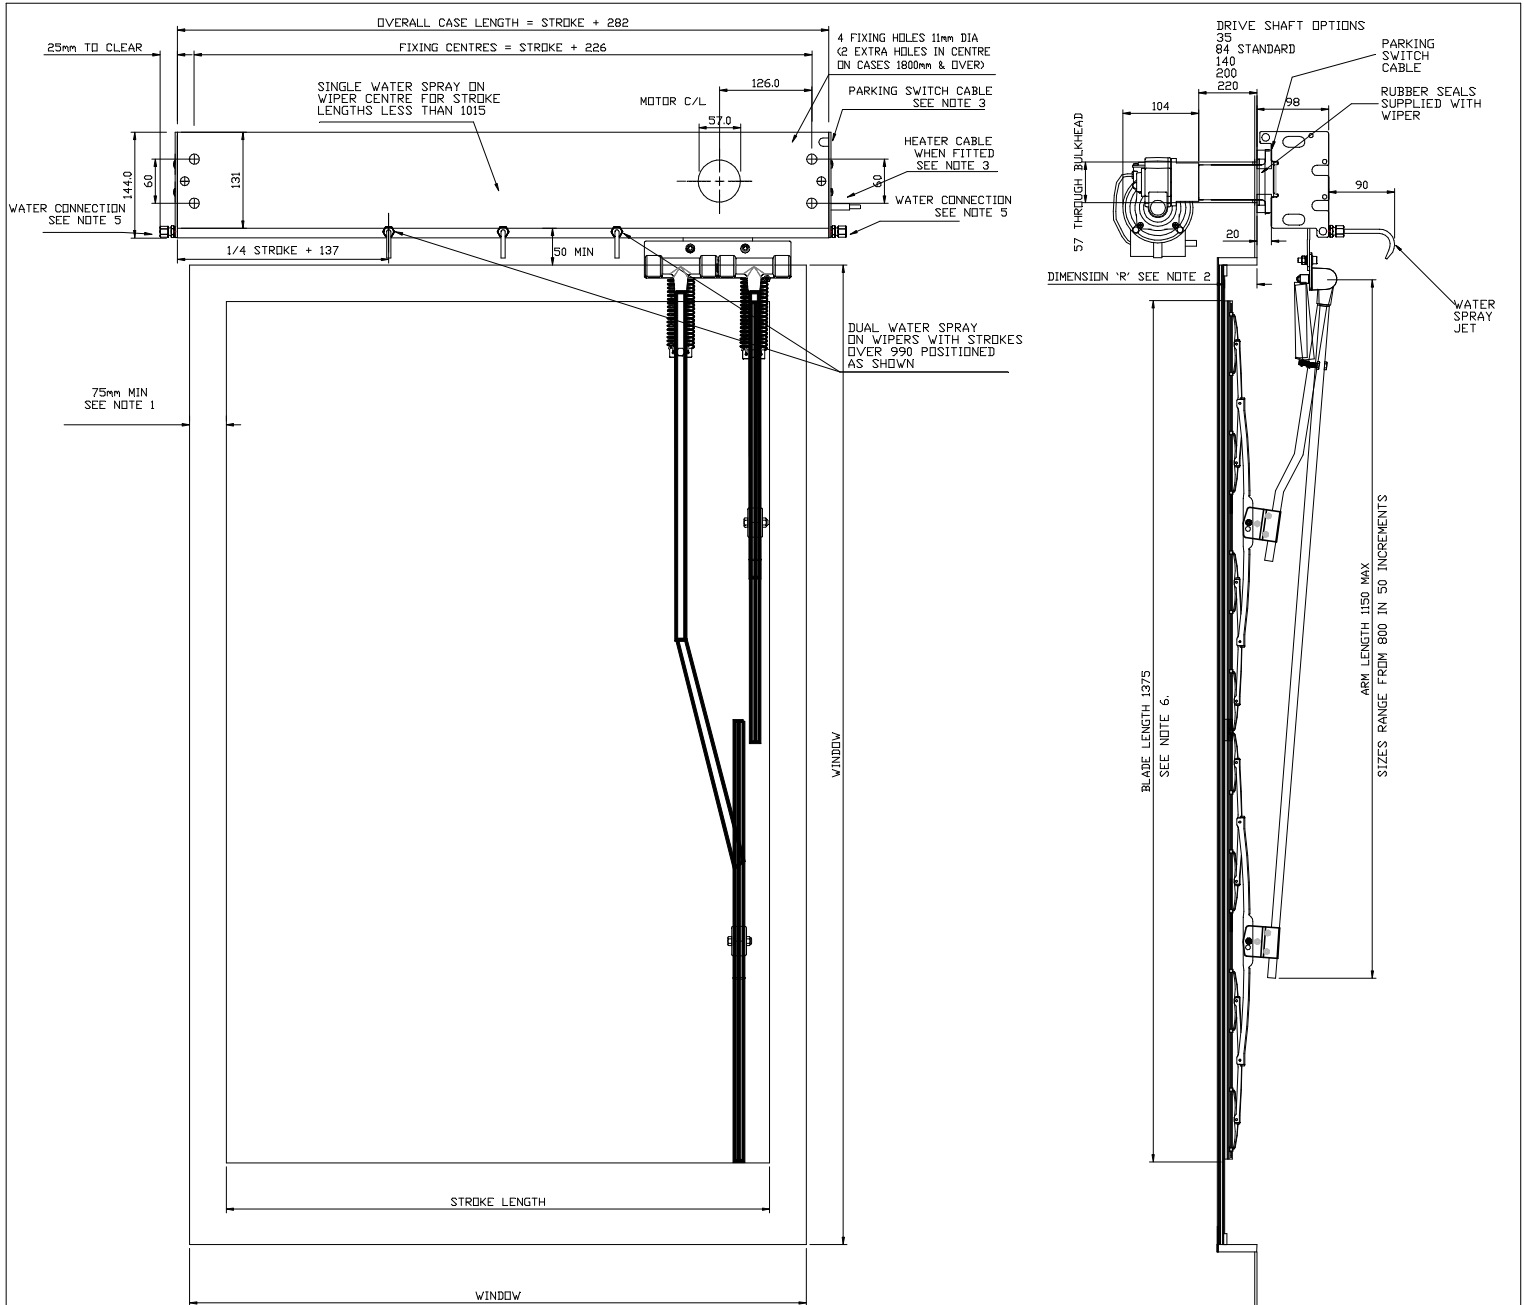


NOTES

1. THESE MINIMUM DIMENSIONS ARE LIMITED BY THE SIZE OF THE CORNER RADII ON THE WINDOW.
2. THE BLADE ARM MAY BE CRANKED WHERE DIMENSION 'R' IS GREATER THAN 75.
3. OPTIONAL HEATER AND PARKING SWITCH 'STANDARD CABLE LENGTH 2 METRES. PARKING SWITCH POSITIONED AT MOTOR END WHEN FITTED.
4. THE HEATER AND PARK SWITCH CABLING TO RUN THROUGH THE BULKHEAD.
5. THE WATER CONNECTION BLANKING PLUG CAN BE FITTED AT EITHER END.
6. WIPER BLADE LENGTH 700 EACH, OVERALL 1375.
7. SEE MANUAL HEATER POWER RATINGS TABLE FOR STROKE OPTIONS AND HEATER DETAILS.
8. THE MOTOR CAN BE POSITIONED RADially THROUGH 360 DEGREES AROUND THE DRIVE SHAFT CENTRE-LINE TO SUIT THE INSTALLATION. ENSURE THAT THE ACCESS SPACE AROUND THE MOTOR SHOWN ON THE DRAWING IS MAINTAINED.

ALL DIMENSIONS IN MM FOR REFERENCE ONLY

CAD FILENAME+DIRECTORY		M:\DRAW\1588\1588-01-CCOVER Dbl Arm									
3rd ANGLE PRO.											
											
TOLERANCES UNLESS OTHERWISE STATED											
DECIMAL SIZES TO 2 PLACES ± 0.1mm											
DECIMAL SIZES TO 1 PLACE ± 0.25mm											
NO DECIMAL PLACES ± 0.5mm											
ANGLES ± 1°											
MAT'L:-		ISS. DIN		DATE		ISS. DIN		DATE		1 06.11.18	
FINISH:-		SCALE:- NTS		DRAWN:- DD		CHKD:-		CHANGED:-			

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.	
WYNN MARINE LIMITED	
REDDITCH	ENGLAND
TITLE-SINGLE TYPE C	
INSTALLATION DRG.	
DRAWING No. 1588-01-CCOVER Dbl Arm	

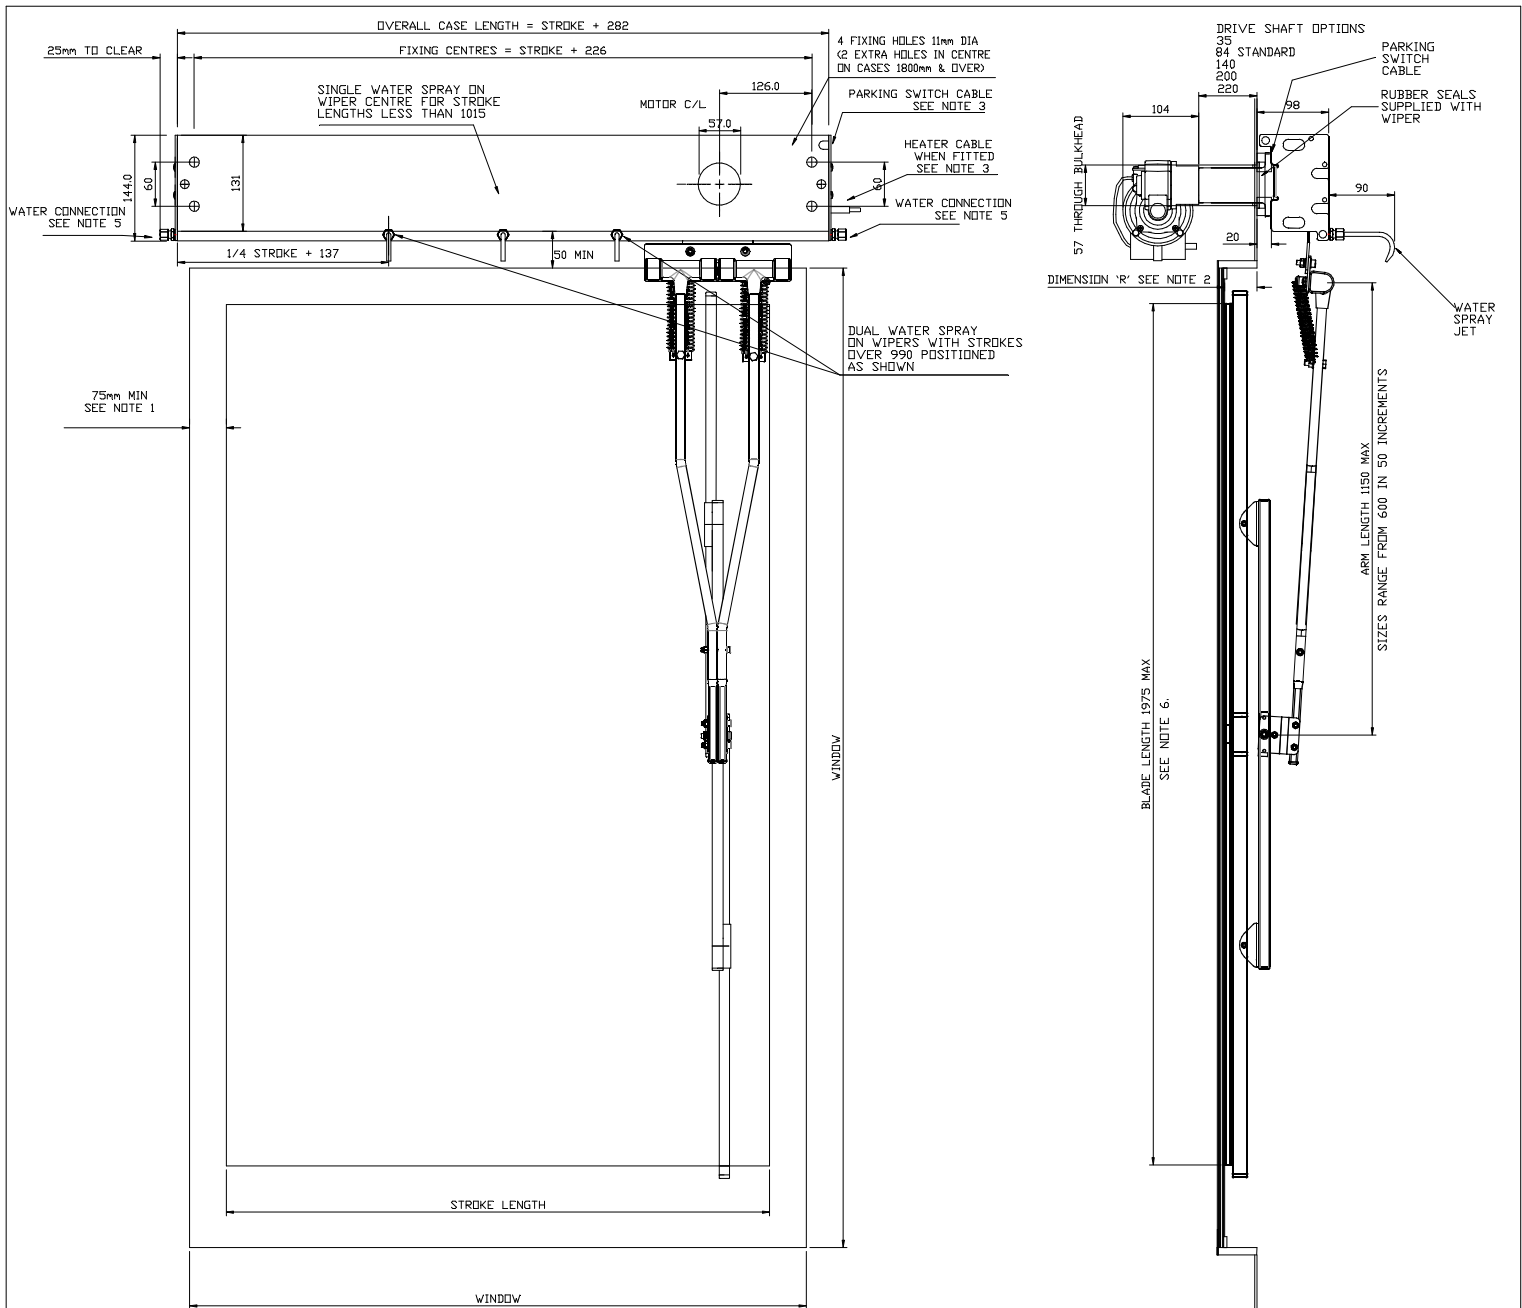


NOTES

1. THESE MINIMUM DIMENSIONS ARE LIMITED BY THE SIZE OF THE CORNER RADII ON THE WINDOW.
2. THE BLADE ARM MAY BE CRANKED WHERE DIMENSION 'R' IS GREATER THAN 75.
3. OPTIONAL HEATER AND PARKING SWITCH 'STANDARD CABLE LENGTH 2 METRES. PARKING SWITCH POSITIONED AT MOTOR END WHEN FITTED.
4. THE HEATER AND PARK SWITCH CABLING TO RUN THROUGH THE BULKHEAD.
5. THE WATER CONNECTION BLANKING PLUG CAN BE FITTED AT EITHER END.
6. DUAL WIPER BLADE LENGTHS RANGE FROM 1175 TO 1975 IN 100 INCREMENTS.
7. SEE MANUAL HEATER POWER RATINGS TABLE FOR STROKE OPTIONS AND HEATER DETAILS.
8. THE MOTOR CAN BE POSITIONED RADIALLY THROUGH 360 DEGREES AROUND THE DRIVE SHAFT CENTRE-LINE TO SUIT THE INSTALLATION. ENSURE THAT THE ACCESS SPACE AROUND THE MOTOR SHOWN ON THE DRAWING IS MAINTAINED.

ALL DIMENSIONS IN MM FOR REFERENCE ONLY

CAD FILENAME+DIRECTORY		M:\DRAW\1588\1588-01-CCOVER HD Arm					
3rd ANGLE PRO.							
TOLERANCES UNLESS OTHERWISE STATED							
DECIMAL SIZES TO 2 PLACES ± 0.1mm							
FRACTIONAL SIZES TO 1 PLACE ± 0.25mm							
NO DECIMAL PLACES ± 0.5mm							
ANGLES ± 1°							
MATERIAL:-		ISS. DIN	DATE	ISS. DIN	DATE	1	06.11.18
FINISH:-		SCALE:- NTS	DRAWN:- DD	CHKD:-	CHANGED:-		


THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.	
WYNN MARINE LIMITED	
REDDITCH	ENGLAND
TITLE-SINGLE TYPE C	
INSTALLATION DRG.	
DRAWING No. 1588-01-CCOVER HD Arm	

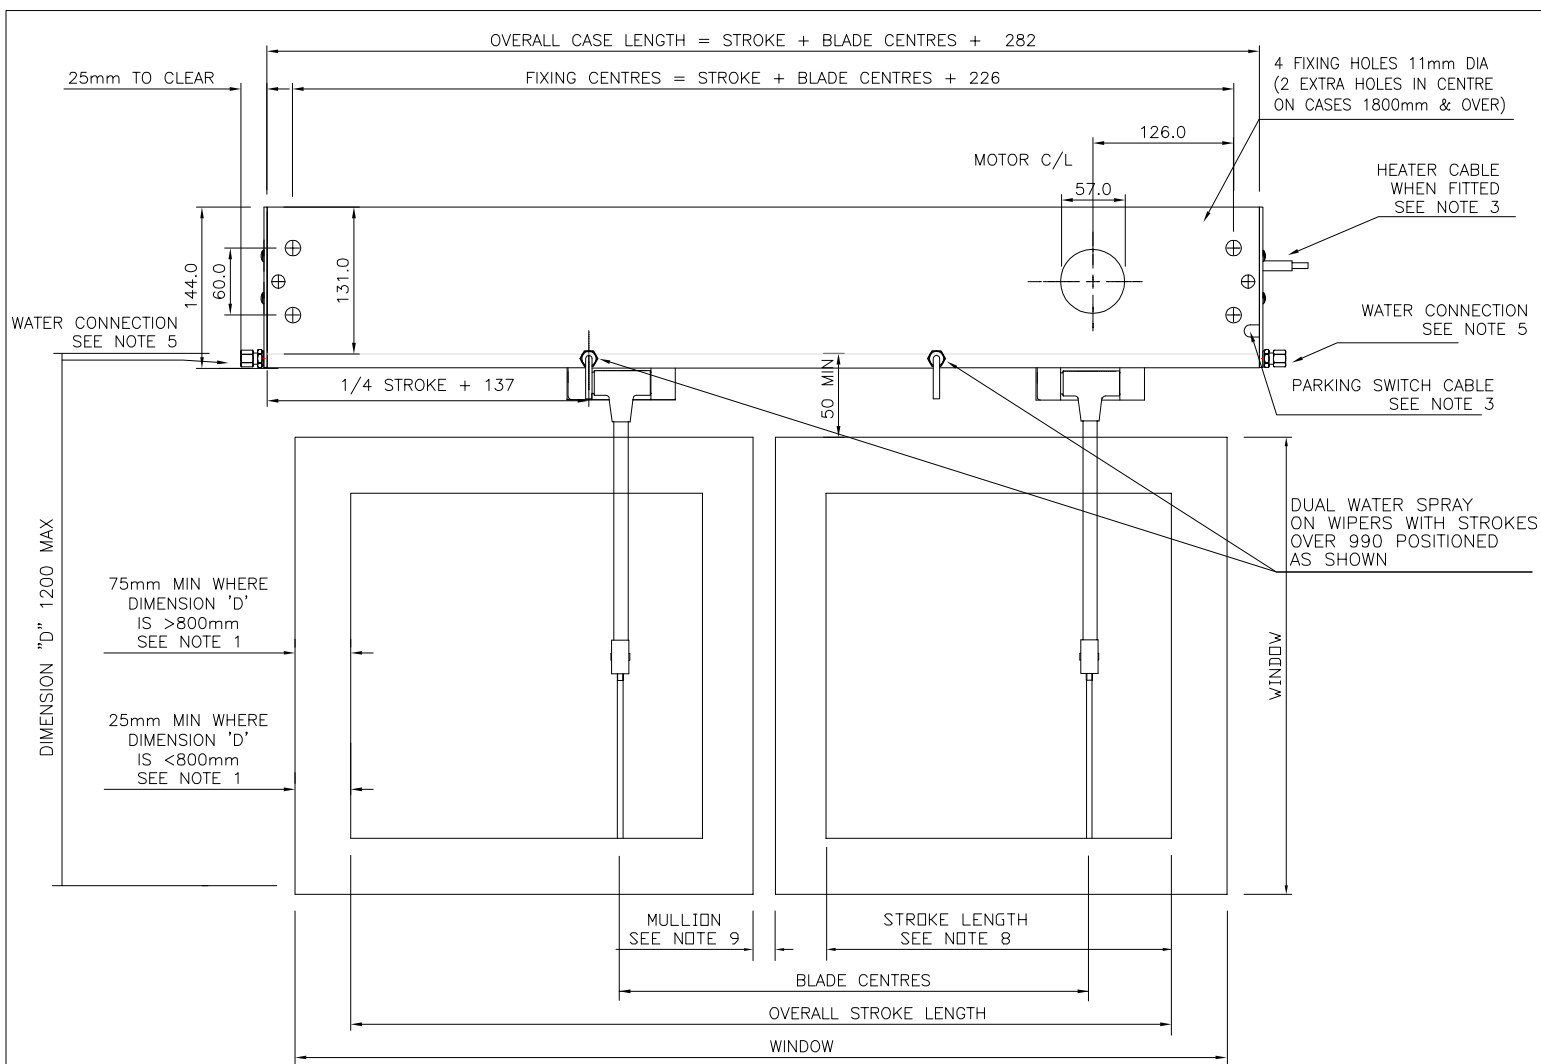

NOTES

1. THESE MINIMUM DIMENSIONS ARE LIMITED BY THE SIZE OF THE CORNER RADII ON THE WINDOW.
2. THE BLADE ARM MAY BE CRANKED WHERE DIMENSION "R" IS GREATER THAN 75.
3. OPTIONAL HEATER AND PARKING SWITCH STANDARD CABLE LENGTH 2 METRES. PARKING SWITCH POSITIONED AT MOTOR END WHEN FITTED.
4. THE HEATER AND PARK SWITCH CABLING TO RUN THROUGH THE BULKHEAD.
5. THE WATER CONNECTION BLANKING PLUG CAN BE FITTED AT EITHER END.
6. RIGID WIPER BLADE LENGTHS RANGE FROM 300 TO 800 AND ARTICULATED WIPER BLADE LENGTHS RANGE FROM 500 TO 1000 BOTH IN 50 INCREMENTS.
7. SEE MANUAL HEATER POWER RATINGS TABLE FOR STROKE OPTIONS AND HEATER DETAILS.
8. THE MOTOR CAN BE POSITIONED RADIALLY THROUGH 360 DEGREES AROUND THE DRIVE SHAFT CENTRE-LINE TO SUIT THE INSTALLATION. ENSURE THAT THE ACCESS SPACE AROUND THE MOTOR SHOWN ON THE DRAWING IS MAINTAINED.

ALL DIMENSIONS IN MM FOR REFERENCE ONLY

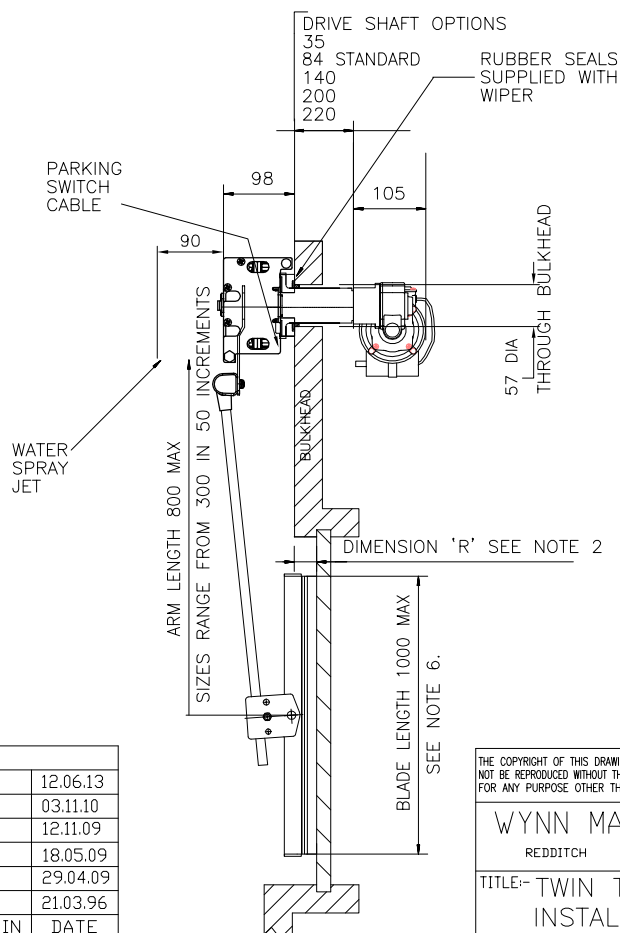


CAD FILENAME+DIRECTORY	M:\DRAW\1588\1588-03-CCOVER						
3rd ANGLE PRO.						6	12.06.13
						5	03.11.10
						4	12.11.09
			9	25.10.18	3		18.05.09
			8	19.01.16	2		29.04.09
			7	25.11.13	1		21.03.96
MAT'L:-	ISS.	DIN	DATE	ISS.	DIN	DATE	
FINISH:-	SCALE:-	NTS	DRAWN:-	DD	CHKD:-	CHANGED:-	

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.

WYNN MARINE LIMITED
REDDITCH ENGLAND


TITLE:- TWIN TYPE C
INSTALLATION DRG.
DRAWING No. 1588-03-CCOVER

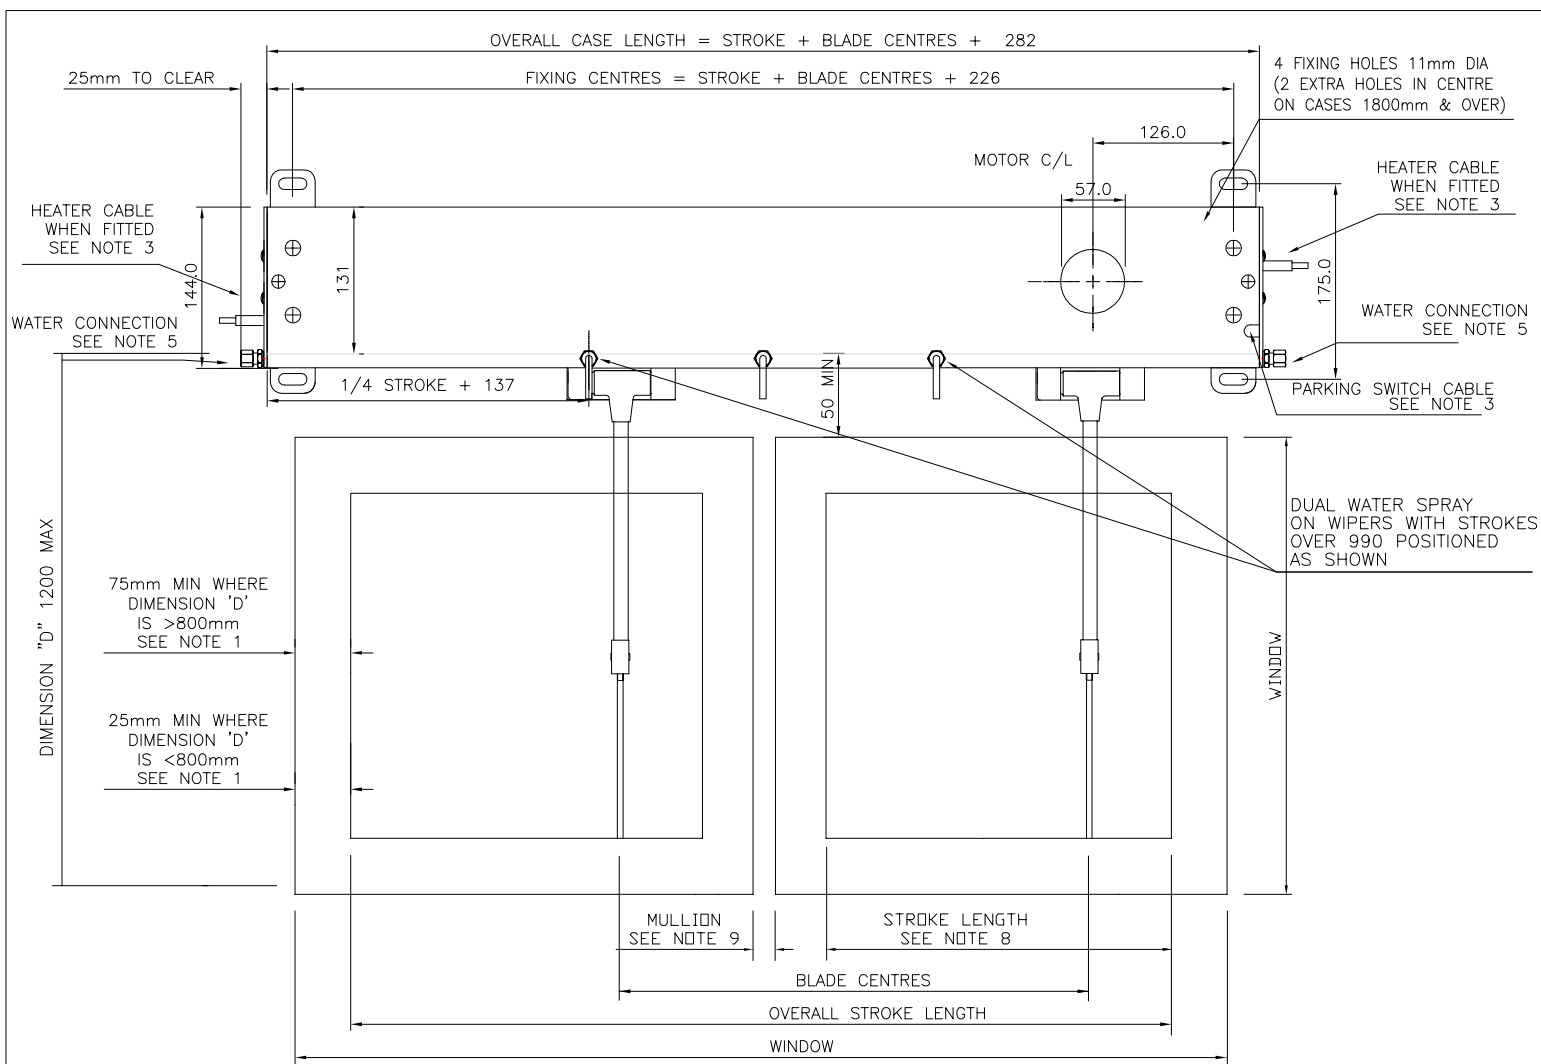

NOTES

1. THESE MINIMUM DIMENSIONS ARE LIMITED BY THE SIZE OF THE CORNER RADII ON THE WINDOW.
2. THE BLADE ARM MAY BE CRANKED WHERE DIMENSION "R" IS GREATER THAN 75.
3. OPTIONAL HEATER AND PARKING SWITCH STANDARD CABLE LENGTH 2 METRES. PARKING SWITCH POSITIONED AT MOTOR END WHEN FITTED.
4. THE HEATER AND PARK SWITCH CABLING TO RUN THROUGH THE BULKHEAD.
5. THE WATER CONNECTION BLANKING PLUG CAN BE FITTED AT EITHER END.
6. RIGID WIPER BLADE LENGTHS RANGE FROM 300 TO 800 AND ARTICULATED WIPER BLADE LENGTHS RANGE FROM 500 TO 1000 BOTH IN 50 INCREMENTS.
7. SEE MANUAL HEATER POWER RATINGS TABLE FOR STROKE OPTIONS AND HEATER DETAILS.
8. THE MOTOR CAN BE POSITIONED RADIALLY THROUGH 360 DEGREES AROUND THE DRIVE SHAFT CENTRE-LINE TO SUIT THE INSTALLATION. ENSURE THAT THE ACCESS SPACE AROUND THE MOTOR SHOWN ON THE DRAWING IS MAINTAINED.

ALL DIMENSIONS IN MM FOR REFERENCE ONLY

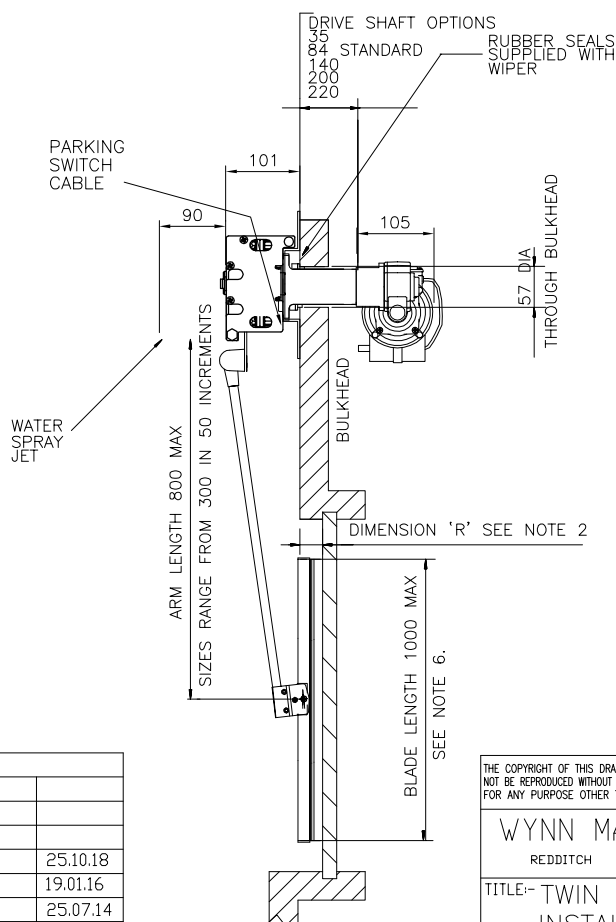


CAD FILENAME+DIRECTORY				M:\DRAW\1588\1588-03-BKT			
3rd ANGLE PRO.							
TOLERANCES UNLESS OTHERWISE STATED DECIMAL DIMS. TO 2 PLACES ± 0.1mm DECIMAL DIMS. TO 1 PLACE ± 0.25mm NO DECIMAL PLACES ± 0.5mm ANGLES ± 1°							
						3	25.10.18
						2	19.01.16
						1	25.07.14
MAT'L:-		ISS.	DIN	DATE	ISS.	DIN	DATE
FINISH:-		SCALE:-	NTS	DRAWN:-	DD	CHKD:-	CHANGED:-

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.

WYNN MARINE LIMITED
REDDITCH ENGLAND

TITLE:- TWIN TYPE C
INSTALLATION DRG.

DRAWING No. 1588-03-BKT

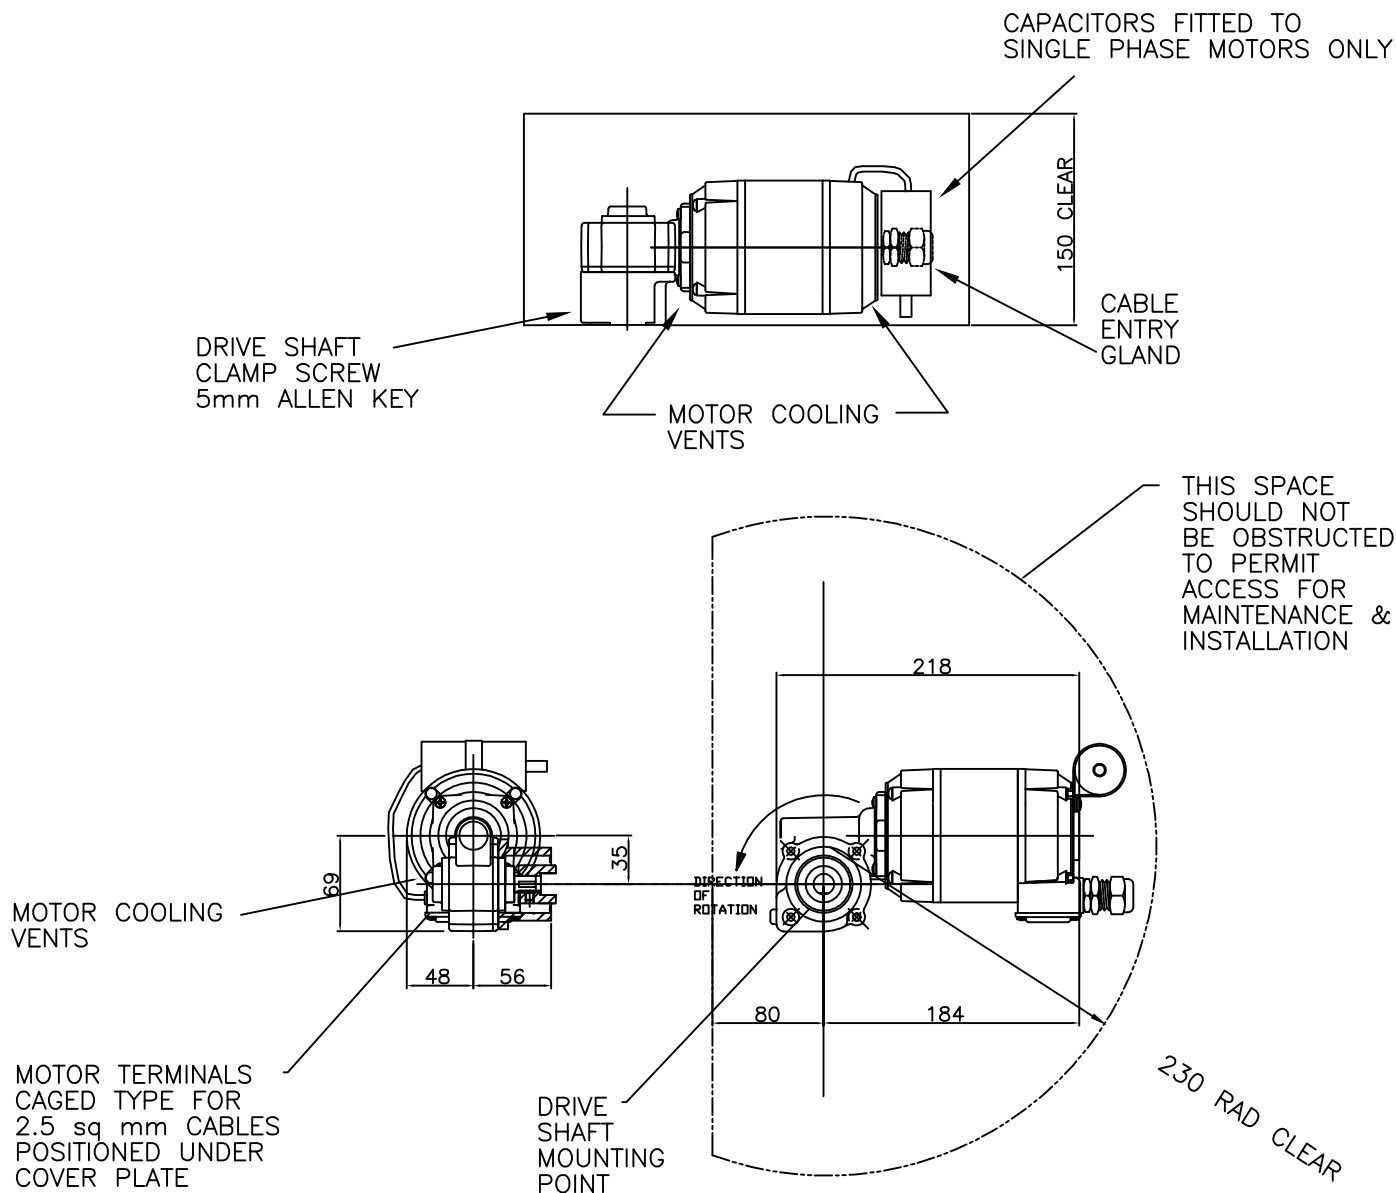

PARVALUX MOTORS WEIGHT 4.5Kg

NOTES

1. USE T RATED FUSES.
2. EARTH BONDING TO CONFORM TO APPROPRIATE NATIONAL CODES AND STANDARDS.
3. CUSTOMER TO WIRE FROM MOTOR CABLES OR TERMINATIONS TO TERMINALS ON THE CONTROLLER WHEN SUPPLIED.
4. ALL MOTORS CAN BE ROTATED THROUGH 360 DEGREES AROUND THE DRIVE SHAFT CENTRE-LINE. NOTE THE ACCESS SPACE WILL ROTATE WITH THE MOTOR.

MOTOR OPTIONS


MOTOR TYPE	VOLTAGE	Hz	PHASE	SPEED	SAFE COMPASS DISTANCE MIN	RUN CURRENT 50Hz	RUN CURRENT 60Hz	FUSE RATING 50Hz	FUSE RATING 60Hz	CAPACITOR
PARV61	115AC	50/60	3	2	0.5M	1.3A	1.1A	2.0A	1.6A	—
PARV62D	230AC	50/60	3	2	0.5M	0.6A	0.6A	1.0A	1.0A	—
PARV64	230AC	50/60	1	1	0.5M	1.2A	1.6A	1.6A	2.0A	8.4uF M-MISC-098PARV
PARV64L	230AC	50/60	1	1	0.5M	0.75A	0.95A	1.0A	1.6A	5uF M-MISC-095PARV
PARV65	115AC	50/60	1	1	0.5M	2.3A	2.6A	2.5A	3.15A	28uF M-MISC-099PARV
PARV65L	115AC	50/60	1	1	0.5M	1.5A	1.6A	2.0A	3.15A	28uF M-MISC-099PARV
PARV81	115AC	50	3	V	0.5M	1.5A		CONTROLLER		—
PARV82	220AC	50	3	V	0.5M	1.1A		CONTROLLER		—

ALL UNSPECIFIED UNITS OF LENGTH IN mm's



			WYNN MARINE LTD REDDITCH ENGLAND	THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.
5		12.05.11		
4		03.11.10		TITLE:— TYPE C WIPER STANDARD PARVALUX MOTOR OPTIONS CHART
ISSUE	DIN	DATE		DRAWING NUMBER:— INST—1588—06

CUSTOMER WIRING


CABLE GLAND

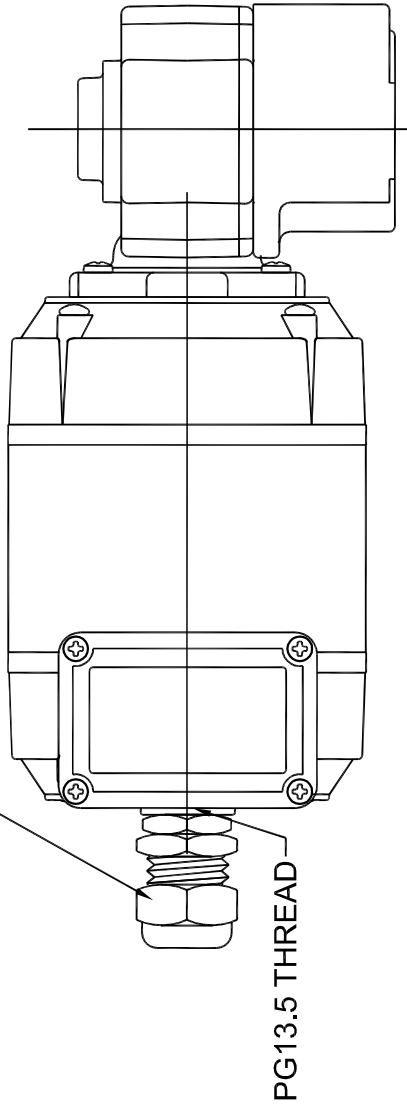


TERMINAL BLOCK
UNDER COVER

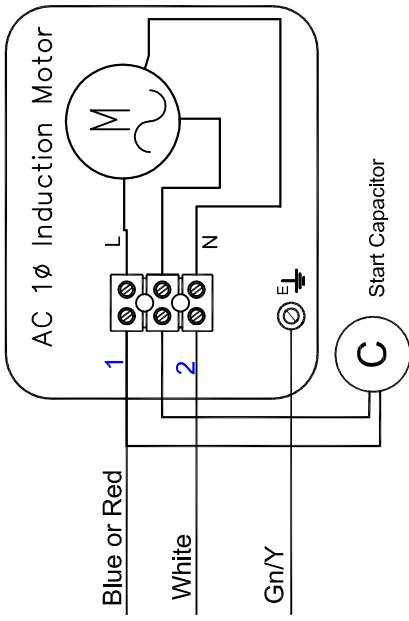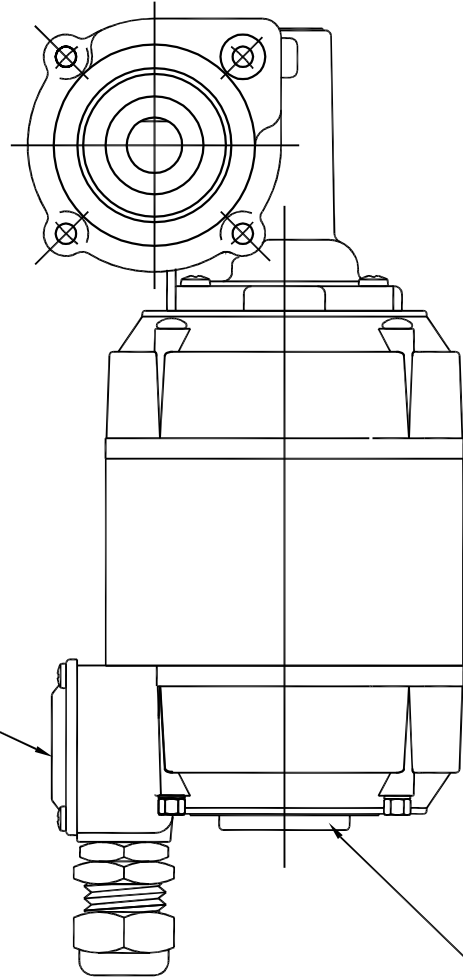

MOTOR TERMINAL BLOCK WIRING DIAGRAM
FOR A PARVALUX 1 PHASE MOTOR
FIT CAPACITORS AS SUPPLIED

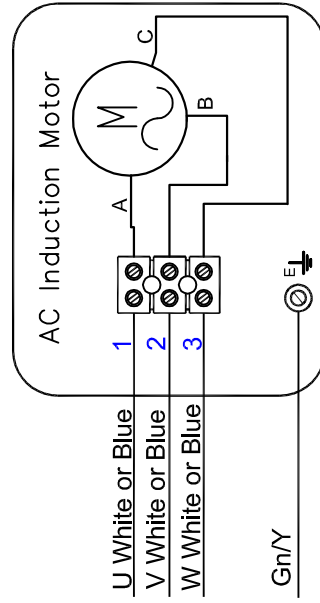

MOTOR TERMINAL BLOCK WIRING DIAGRAM
FOR A PARVALUX GA81/GA82 MOTOR

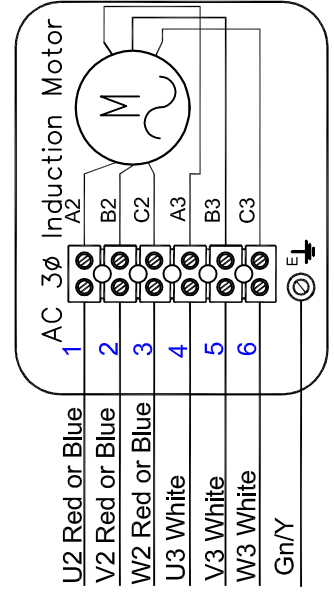

MOTOR TERMINAL BLOCK WIRING DIAGRAM
FOR A PARVALUX 3 PHASE 2SP MOTOR

WIRING DIAGRAM FOR PARVALUX TYPE AC MOTORS FOR WYNN TYPE C STRAIGHT LINE WIPER

GENERAL FAULT FINDING GUIDE

NOTE: This fault finding guide assumes a reasonable level of technical ability and should be carried out by a suitably qualified person.

Problems: Control panel does not operate wiper.

Possible Cause	Solution
No Power.	Check power supply is on and working.
Power not reaching motor	Check ship's incoming supply fuses or circuit breakers. Check for wiring fault, broken wire or loose terminal. If possible confirm (with voltmeter) power is present at motor input and output terminals of control module.
Connections to motor incorrect.	Check wiring according to the appropriate electrical installation drawing.
Ship's voltage too low.	Check voltage as close to the motor as possible, with motor running. See relevant tables for acceptable values.
Motor Thermal Cut Out tripped. Single Phase AC motors only.	The 1 Ø AC motors have a thermal cut out embedded into the stator winding. If the motor gets too hot the thermal cut out disconnects the supply to the motor. Switch off and allow the motor to cool down. About 20 minutes later the cut out will reset allowing normal operation.
Motor brushes or commutator worn (DC motor only)	Check motor commutator and brushes
Motor burned out.	This should not be possible - could happen by incorrect voltage of motor, or a motor fault. The motor needs a reasonable amount of free space to provide sufficient cooling airflow – check. The motor should be protected by fuses, check type and rating.
Wiper motor not fully engaged on coupling.	Slacken pinch bolt, move motor and/or wiper arm to align coupling and push motor into engagement with coupling. Retighten pinch bolt. Make sure that the rubber coupling is fitted
Carriage motion jammed.	It should be possible by pushing the blade arm to move the mechanism over the stroke length. Remove cover and check for obstructions. Check the Blade Arm Screws.
Drive pulley turning but belt slipping.	Excessive friction - Check carriage rollers and motor drive coupling. Replace as required. Idle pulley springs broken or missing. Replace.
Drive belt broken or damaged.	Inspect belt for slip or burn damage. Belt at end of life. Replace.
Idle pulley jammed.	Damaged by impact, or bearing system failed. Replace assembly.
Corrosion.	If corroded, check for water ingress through seals and tightness of connections, Replace wiper unit if necessary

Problem: Wiper runs but at wrong speed

Possible Cause	Solution
Ship's voltage incorrect.	Check voltage as near as possible to the motor, with motor running.
Motor brushes worn (DC Only)	Inspect brushes and replace as necessary.
High / Low speed wiring incorrect (3 Phase 2 Speed models only)	Check wiring complies with appropriate drawing.
One phase missing (3 Phase 2 Speed models only)	Check controller. Check ships fuses.

Problem: Wiper runs but is noisy

Possible Cause	Solution
Wiper arm is obstructed by: - Window frame, spray jets, etc.	If necessary gently bend arms or spray jets out of path of wiper arm.
Incorrect arm attachment screws.	These must not be longer than the 10mm screws provided by Wynn
Vibration of wiper unit	Check the front cover fixing screws are secure.
Arm attachment plate fouling on wiper case	Attachment screws not fully tightened - check. Blade arm or bracket bent out of place - check.

Problem: Wiper does not clean the screen properly.

Possible Cause	Solutions
Blade not in contact with screen.	Blade or arm bent - inspect and replace. Arm pivots seized due to corrosion - replace. Heaters ineffective allowing ice build up.
Weak springs on blade arm.	Stronger springs may be required. Contact Agent/Distributor
Broken springs on blade arm.	Investigate reason of failure and replace. Springs are good down to -40°C.
Blade rubber missing or damaged.	Maintenance item. Replace as required.

Problem: Wiper does not park correctly

Possible Cause	Solution
Park Sensor failed.	Check reed sensor action, will need tester (meter).
Park Sensor Actuator missing.	Check magnet/spacer arrangement on carriage.

Problem: If fitted, heater does not become warm when switched on

Possible Cause	Solutions
Fuse blown or circuit breaker tripped (if fitted).	Check for short-circuited heater, will need tester (meter). Check for wiring damage or loose wires. Check connections are good.
Heater failed.	Check for continuity, will need tester (meter).
Earth leakage circuit breaker trips.	It is common for earth leakage to rise if a heater has not been used for a while - if possible allow heater the warm up so to dry out. The heater's water seal or cable may be damaged allowing ingress of water - check and replace.
No power.	Check Controller.

Problem: If fitted, little or no washer water comes out when button pressed.

Possible Cause	Solution
Pump or supply pressure too low.	Check Ship's water supply, or pump for output pressure.
On reservoir systems, empty.	Check - refill.
Water control valve faulty or not operating.	Check solenoid valve continuity. Replace if open circuit.
Supply lines or jets blocked.	Try air purge, if available. Dismantle and flush pipes.
Water frozen.	Switch on heaters.

TYPE C WIPER MAINTENANCE

Wynn products have been proven over many years to perform well under the harshest condition of use. To maintain their performance the following schedule is recommended:

TOOLS REQUIRED:

- I. 4MM ALLEN KEY
- II. 5MM ALLEN KEY
- III. 6MM ALLEN KEY
- IV. 6MM SOCKET
- V. 8MM SPANNER
- VI. 10MM SPANNER
- VII. 10MM SOCKET
- VIII. 11MM SPANNER
- IX. 3MM FLAT BLADE SCREWDRIVER
- X. NO2 CROSS POINT SCREWDRIVER

Every 6 Months

DC motors only

1. Inspect the motor brushes. Remove motor end cover. Prevent brushes from running down to less than 6mm height in service. Brushes can be lifted out of their holder after lifting off the springs. Replace brushes back into same holder and in the same orientation. Ensure that the brush 'pig tails' is free and that the springs are correctly replaced.
2. When replacing brushes, carefully clear out any residual carbon dust from the motor.



WARNING: DO NOT INHALE THE CARBON DUST.

3. Inspect the motor commutator – it should still be bright. If it is blackened the motor should be replaced or serviced. This can be done with light cleaning with 'flour' paper, but not 'emery' paper.

Every 12 Months

1. Check condition of the Articulated/Rigid Wiper Blade. Replace if necessary.
2. Check Heaters if fitted. If these have not been used for some time, then leave them on for approximately 2 hours.

NOTE: If not used for long periods, some mineral insulated heaters will take up moisture and begin to show current leakage to ground. By running them for the stated time this process can be reversed and the insulation returned to near infinity values. When dry, insulation resistance is > 100 M ohm at 500V.

3. Check the drive belt for deterioration. Replace if necessary.
4. Check carriage is smooth and all guide rollers are free to rotate. Inspect 'tyres' on the guide rollers for splitting / perishing. Replace complete roller if necessary.



Caution: Guide rollers have an integral dry bearing and MUST NOT be oil or grease lubricated.

5. Check for free movement of idler pulleys in response to belt tension. Lubricate as necessary with water resistant grease.

6. Ensure free movement of drive pulley. Replace if damaged or when showing signs of excessive wear.

NOTE: The drive pulley is jig assembled and should not be dismantled.

7. Check for free blade arm spring movement. Dismantle, re-grease or replace if necessary.

TYPE C WIPER INSPECTION / RENEWAL OF PARTS



WARNING: To ensure health & safety, remove power from the control unit, before working on any parts of the wiper either inside or outside.

TOOLS REQUIRED:

- I. 4MM ALLEN KEY
- II. 5MM ALLEN KEY
- III. 6MM ALLEN KEY
- IV. 6MM SOCKET
- V. 8MM SPANNER
- VI. 10MM SPANNER
- VII. 10MM SOCKET
- VIII. 11MM SPANNER
- IX. 3MM FLAT BLADE SCREWDRIVER
- X. NO2 CROSS POINT SCREWDRIVER

Blade Replacement

1. Loosen the 2 x 8mm nuts on the blade attachment clip.
2. Slide the blade attachment clip and blade assembly off the wiper arm.
3. Re-assembly is reversal of above instructions.

Arm Replacement

1. If Heaters are fitted disconnect from terminals to allow the cover to be removed from the wiper.

OUTSIDE

2. Remove any pipework fittings / blanking plugs from both ends of the wiper.
3. Slacken cable glands and withdraw heater cable from bulkhead.
4. Remove the 2 x M8 Cap head bolts at each end of the cover and set aside.
5. Carefully remove the cover and set aside.
6. Remove the 4 x M6x10mm screws securing the arm to the carriage plate. The arm and blade assembly is now free from the wiper, set both assembly and fasteners aside.
7. Slacken the blade clip bolts and remove blade. Set aside for reuse.
8. Re-assembly is reversal of above instructions.

Drive Belt

1. If Heaters are fitted disconnect from terminals to allow the cover to be removed from the wiper.

OUTSIDE

2. Remove any pipework fittings from both ends of the wiper.
3. Slacken cable glands and withdraw heater cable from bulkhead.
4. Remove the 2 x M8 Cap head bolts at each end of the cover and set aside.

5. Carefully remove the cover and set aside.
6. Remove the 4 x M6x10mm screws securing the arm to the carriage plate. The arm and blade assembly is now free from the wiper, set both assembly and fasteners aside.
7. Slip the belt off the spring-loaded pulleys then slide the carriage/belt assembly out of the end of the case at the idler pulley end. Note: The assembly can be removed from the drive pulley end, but the park sensor will then need to be detached first (where fitted).
8. In multi wiper installations, if there is insufficient space between adjacent wipers to remove the carriage, then it will be necessary to draw the carriage / belt assembly through adjacent wiper cases, detaching park sensors where necessary.
9. Inspect the drive belt and replace if damaged or worn. To detach the drive belt, note how the parts are assembled, then undo the 2 small nuts securing the belt to the clip.
10. Fit a new belt. Spare belts are supplied with nuts and clip plate. Refit and tighten nuts to the same height as the original and secure with Loctite thread lock (or similar).
11. Fit the carriage & belt assembly back into the casing and slip the belt onto the drive & idler pulleys.
12. Move the carriage by hand and ensure that it travels the full stroke length freely and without any obstruction. (Motion will feel restricted because the motor is being rotated if in doubt discount the motor). Refit the blade assembly with special screws removed.
13. Refit the front cover and secure with the 2 off M8 cover bolts. Reconnect any pipework fittings removed in para 2, and heater cable if removed at para 1.

Guide Rollers

1. Follow the Drive Belt renewal instructions 1 to 7 above.
2. Remove the M5 Nylock nut & flat washer securing the guide roller and remove the guide roller. M5 Nylock nuts & flat washers supplied with set of 8 guide rollers.
3. Fit the new guide roller and secure with the M5 Nylock nut & flat washer. Ensure that M5 Nylock nut is tightened firmly.
4. Re-assembly is reversal of above instructions.



Caution: Guide rollers have an integral dry bearing and **MUST NOT** be oil or grease lubricated.

Drive Shaft and Pulley Assembly

1. Slacken the clamping bolt securing the motor to the drive shaft assembly, withdraw the motor from the shaft and set aside ensuring the black coupling is kept with the motor.
2. Follow the Drive Belt renewal instructions 1 to 6 above.
3. Remove the 2 screws securing the park switch to the wiper case, withdrawing the cable through the slot in the case. Keep screws and fittings safe.
4. Dismount wiper from bulkhead and set aside fixings.

5. Unbolt drive shaft and pulley assembly from the main body of the wiper and set the fixings aside.
6. Withdraw the assembly from the wiper body and discard.
7. Insert the new assembly onto the body. Re-assembly is reversal of the above instructions and in accordance with the standard wiper installation instructions elsewhere in the manual.

Wiper Motor Replacement

1. Disconnect motor wiring and make a note of the connections.
2. Loosen motor pinch bolt and remove motor.
3. Ensure new motor has a rubber coupling fitted to the dog gear. Line up motor dog gear with drive shaft dog gear and slide motor into position. Tighten pinch bolt.
4. Wire to motor terminal connections.

Type C Common Cover Wiper Spares List

Ident	Description	Quantity	Part Number
1a	Flat Blade Assembly	1	FB WSL ***
1b	Articulated Blade Assembly	1	SP1279-553-***
1c	Heavy Duty Dual Blade Assembly	1	805201-***
2	Blade Attachment Clip (14mm Articulated Blade & FB)	1	SP1279-493
	Blade Attachment Clip (20mm Articulated Blade)	1	SP1279-532
3	Blade Arm Assembly	1	CC**#R
4	Blade Arm Torsion Spring	1	SP1292-221
4a	Arm Spring(s) - where fitted at top of arm ‡	A/R	1279-157
5	Blade Arm Pivot Blocks	1 Kit/arm	SP1279-486-#.#
6	Arm Attachment Screws	Set of 4	SP1588-488
7	Carriage Plate Assembly – Single Blade	1	SP1588-005-M
	Carriage Plate Assembly – Twin Blade	1	SP1588-312-***
8	8 Guide Rollers C/W Nuts	Set of 8	SP1588-117
	Guide Roller Assy	1	SP1588-006
10	Connecting Rod Assembly – Single	1	SP1588-474
	Connecting Rod Assembly – Twin Blade	1	SP1588-474T
11	Vee-Belt	1	SP1279-106-###
12	Idler Pulley Assembly c/w Springs (Single Blade)	1	SP1588-452
	Idler Pulley Assembly c/w Spring (Twin Blade)	1	SP1588-452T
13	Idler Pulley Tension Spring (Single Blade)	Set of 2	SP1279-157
	Idler Pulley Tension Spring (Twin Blade)	Set of 2	SP1279-496
14	Idler Pulley Guide Assembly	1	SP1588-490
15	Drive Shaft and Pulley Assembly - 84mm Std	1	SP1588-009-117
	Drive Shaft and Pulley Assembly - 140mm	1	SP1588-009-173
	Drive Shaft and Pulley Assembly - 200mm	1	SP1588-009-233
	Drive Shaft and Pulley Assembly - 220mm	1	SP1588-009-253

Ident	Description	Quantity	Part Number
	Drive Shaft and Pulley Assembly - 240mm	1	SP1588-009-273
	Drive Shaft and Pulley Assembly - 310mm	1	SP1588-009-310A
	Drive Shaft and Pulley Assembly - 35mm	1	SP1642-003
	Gas Tight Drive Shaft and Pulley Assembly Std	1	SP1588-030-117
	Gas Tight Drive Shaft and Pulley Assembly 140mm	1	SP1588-030-173
	Gas Tight Drive Shaft and Pulley Assembly 200mm	1	SP1588-030-233
17a	Parvalux 61, 115V AC, 50/60Hz, 3-Ph, 2 Speed	1	SP1490-000GA61
	Parvalux 62D+, 230V AC, 50/60Hz, 3-Ph, 2 Speed	1	SP1490-000GA62D
	Parvalux 64-T, 230V AC, 50/60Hz, 1-Ph, 1 Speed	1	SP1490-000GA64
	Parvalux 64L, 230V AC, 50/60Hz, 1-Ph, Low Speed	1	SP1490-000GA64L
	Parvalux 65, 115V AC, 50/60Hz, 1-Ph, 1 Speed	1	SP1490-000GA65
	Parvalux 65L, 115V AC, 50/60Hz, 1-Ph, Low Speed	1	SP1490-000GA65L
	Parvalux 81, 115V AC, 3 Speed	1	SP1490-000GA81
	Parvalux 82, 220V AC, 3 Speed	1	SP1490-000GA82
17c	PM3M 24Vdc Motor	1	SP1279-558-24
	PM3M 24Vdc Motor Slow Speed	1	SP1279-558L-24
18	Front Cover - Less Heater	1	See calculator 1681-161
19	Heater - Single Wiper	1	SP1588010\$\$\$^^
19a	Heater Clip	A/R	SP1588-056
20	Spray Tube Assembly	1	SP1588-418
21	Cover Bolts	each	zA0008-090S
22	End Cover Left Hand	each	SP1588-058L*
	End Cover Right Hand	each	SP1588-058R*
23a	Fixing Screw	6	zP00012S-1.0S
23b	Blanking Plug	2	1588-062
23c	Metric Pipe Fitting	1	1588-038
23d	Tubing Plug	1	1588-037

Ident	Description	Quantity	Part Number
24	Self-Parking Assembly (Reed sw and magnet) 2m	1	SP1588-012-1
	Self-Parking Assembly (Reed sw only) 2m	1	SP1587-034-1
25	Main Frame	1	See calculator 1681-161
26	Motor Housing Nut	each	10015100
27	Motor Housing Washer	each	10025306B
28	Motor Housing Bolt	each	zA0006-020S
29	Pivot Block Securing Nut	2	zNL0.25F-S
not shown	Wash Fittings SLW Single	1	SP1588-672
not shown	Wash Fittings SLW Twin	1	SP1588-673
not shown	Wash Fittings SLW Single Long	1	SP1588-674
not shown	Drive Coupling – fitted inside Drive Shaft	1	SP1279-250
not shown	L050 Rubber Spider – fitted to Drive Coupling	1	SP1279-252
not shown	Sealing Grommet – fitted around Drive Shaft	1	SP1279-137
not shown	Sealing Grommet Spacer– fitted around Drive Shaft	1	SP1588-745

*** In the Part Number means length in mm.

**# In the Part Number means length in cm and arm spring pressure code.

#.# In the Part Number means spring pressure in lb/ft. This is determined by Wynn according to arm and blade dimensions, together with any window rake angle from the vertical. This value can also be obtained from the original order documentation. See Wynn Agent for more details.


Belt length (written on belt as A####) in Inches.

‡ Where required, extra spring pressure is obtained by the addition of 1 or 2 springs to the wiper arm. Where fitted, order 1 or 2 as required. Contact Wynn Agent for more details.


\$\$\$ Where \$\$\$ is voltage (220,115 or 024)

^^^ Where ^ is heater length code.


Type C Common Cover Single Spare Parts Drawing

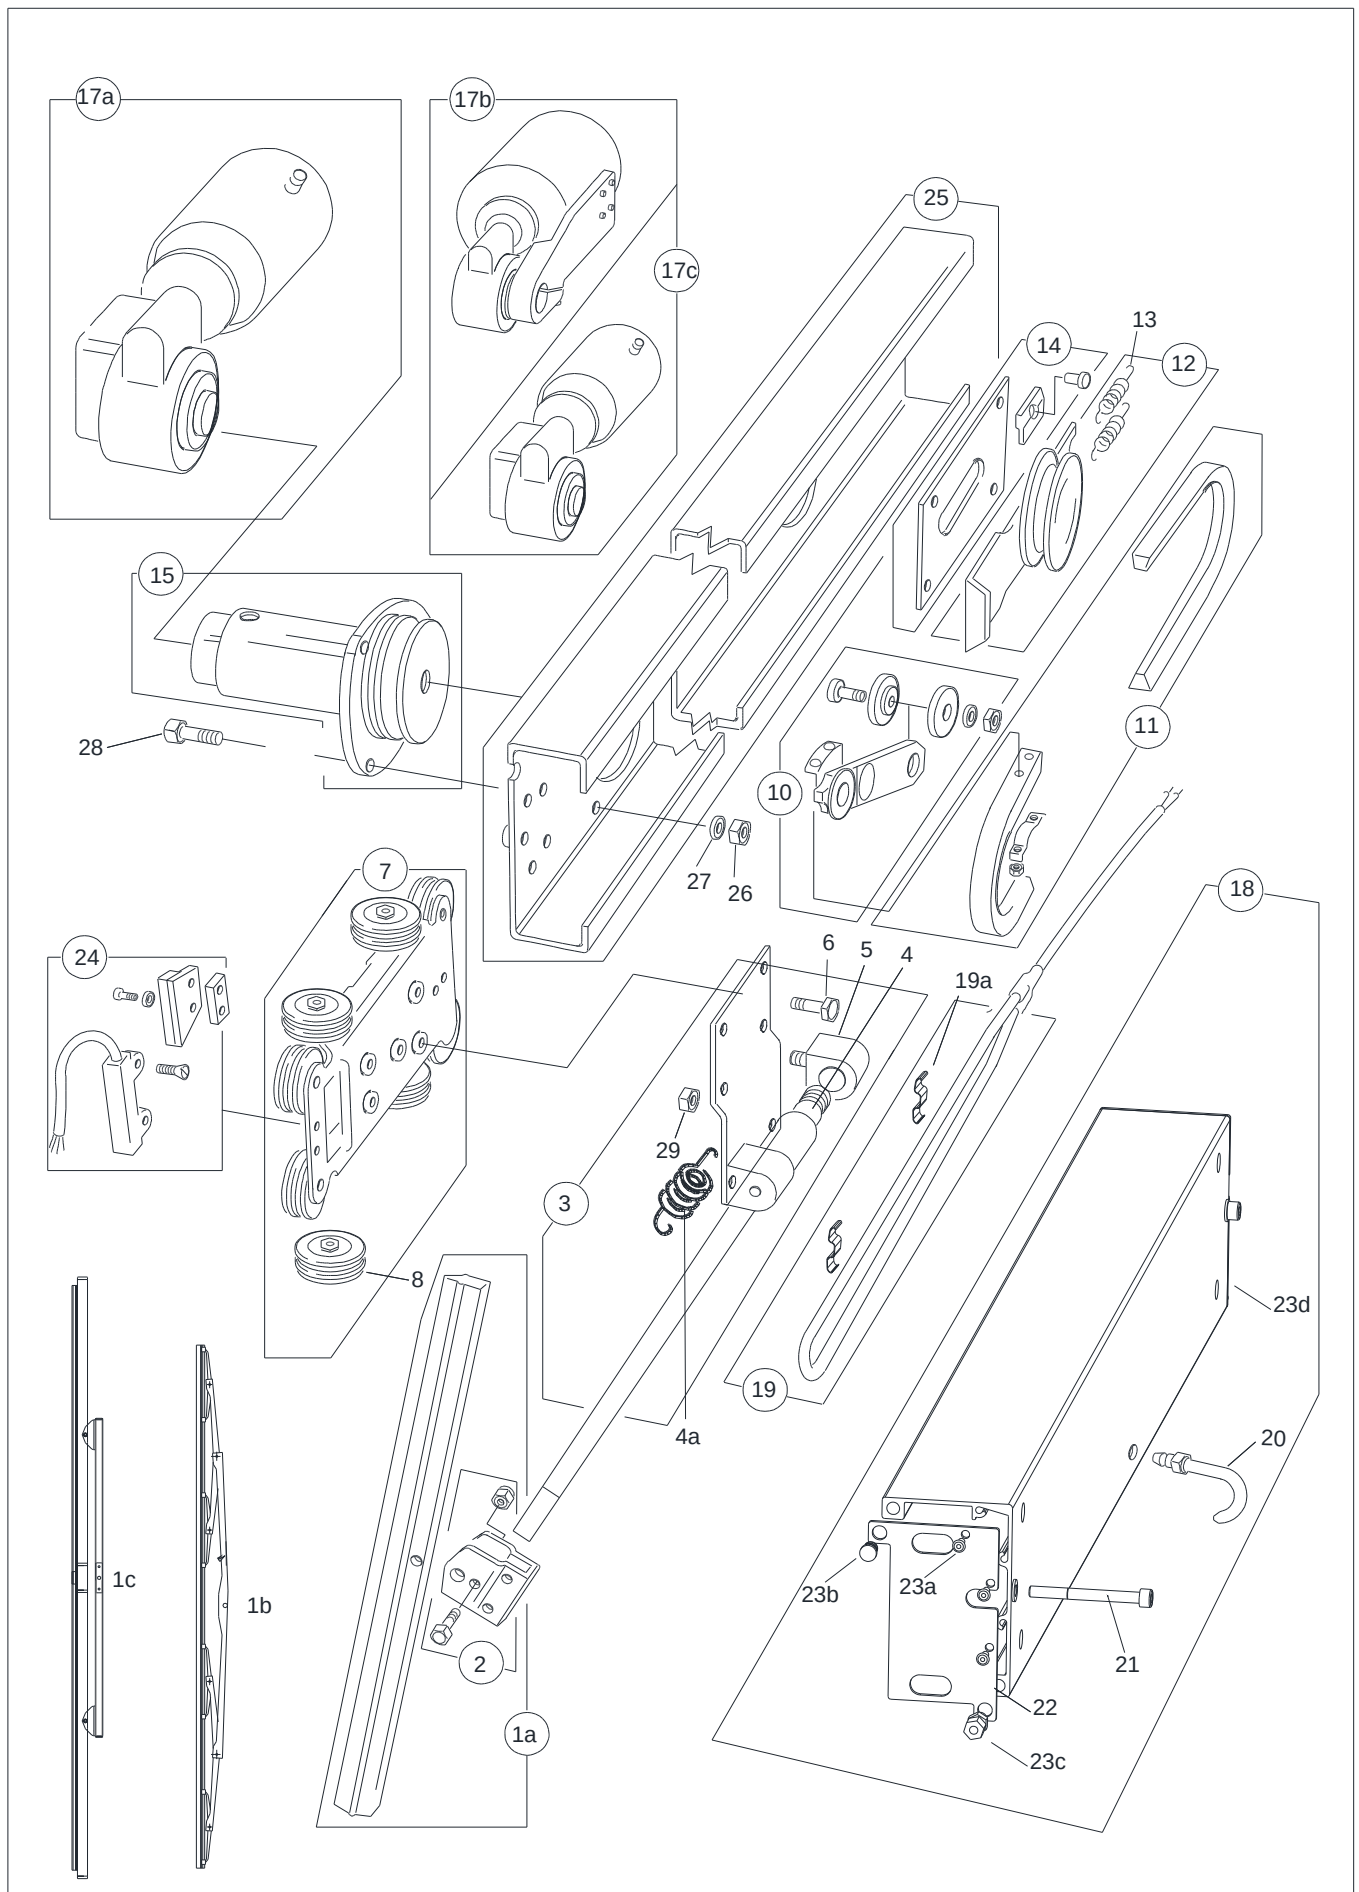

Type C Common Cover Twin Spare Parts Drawing (Short)

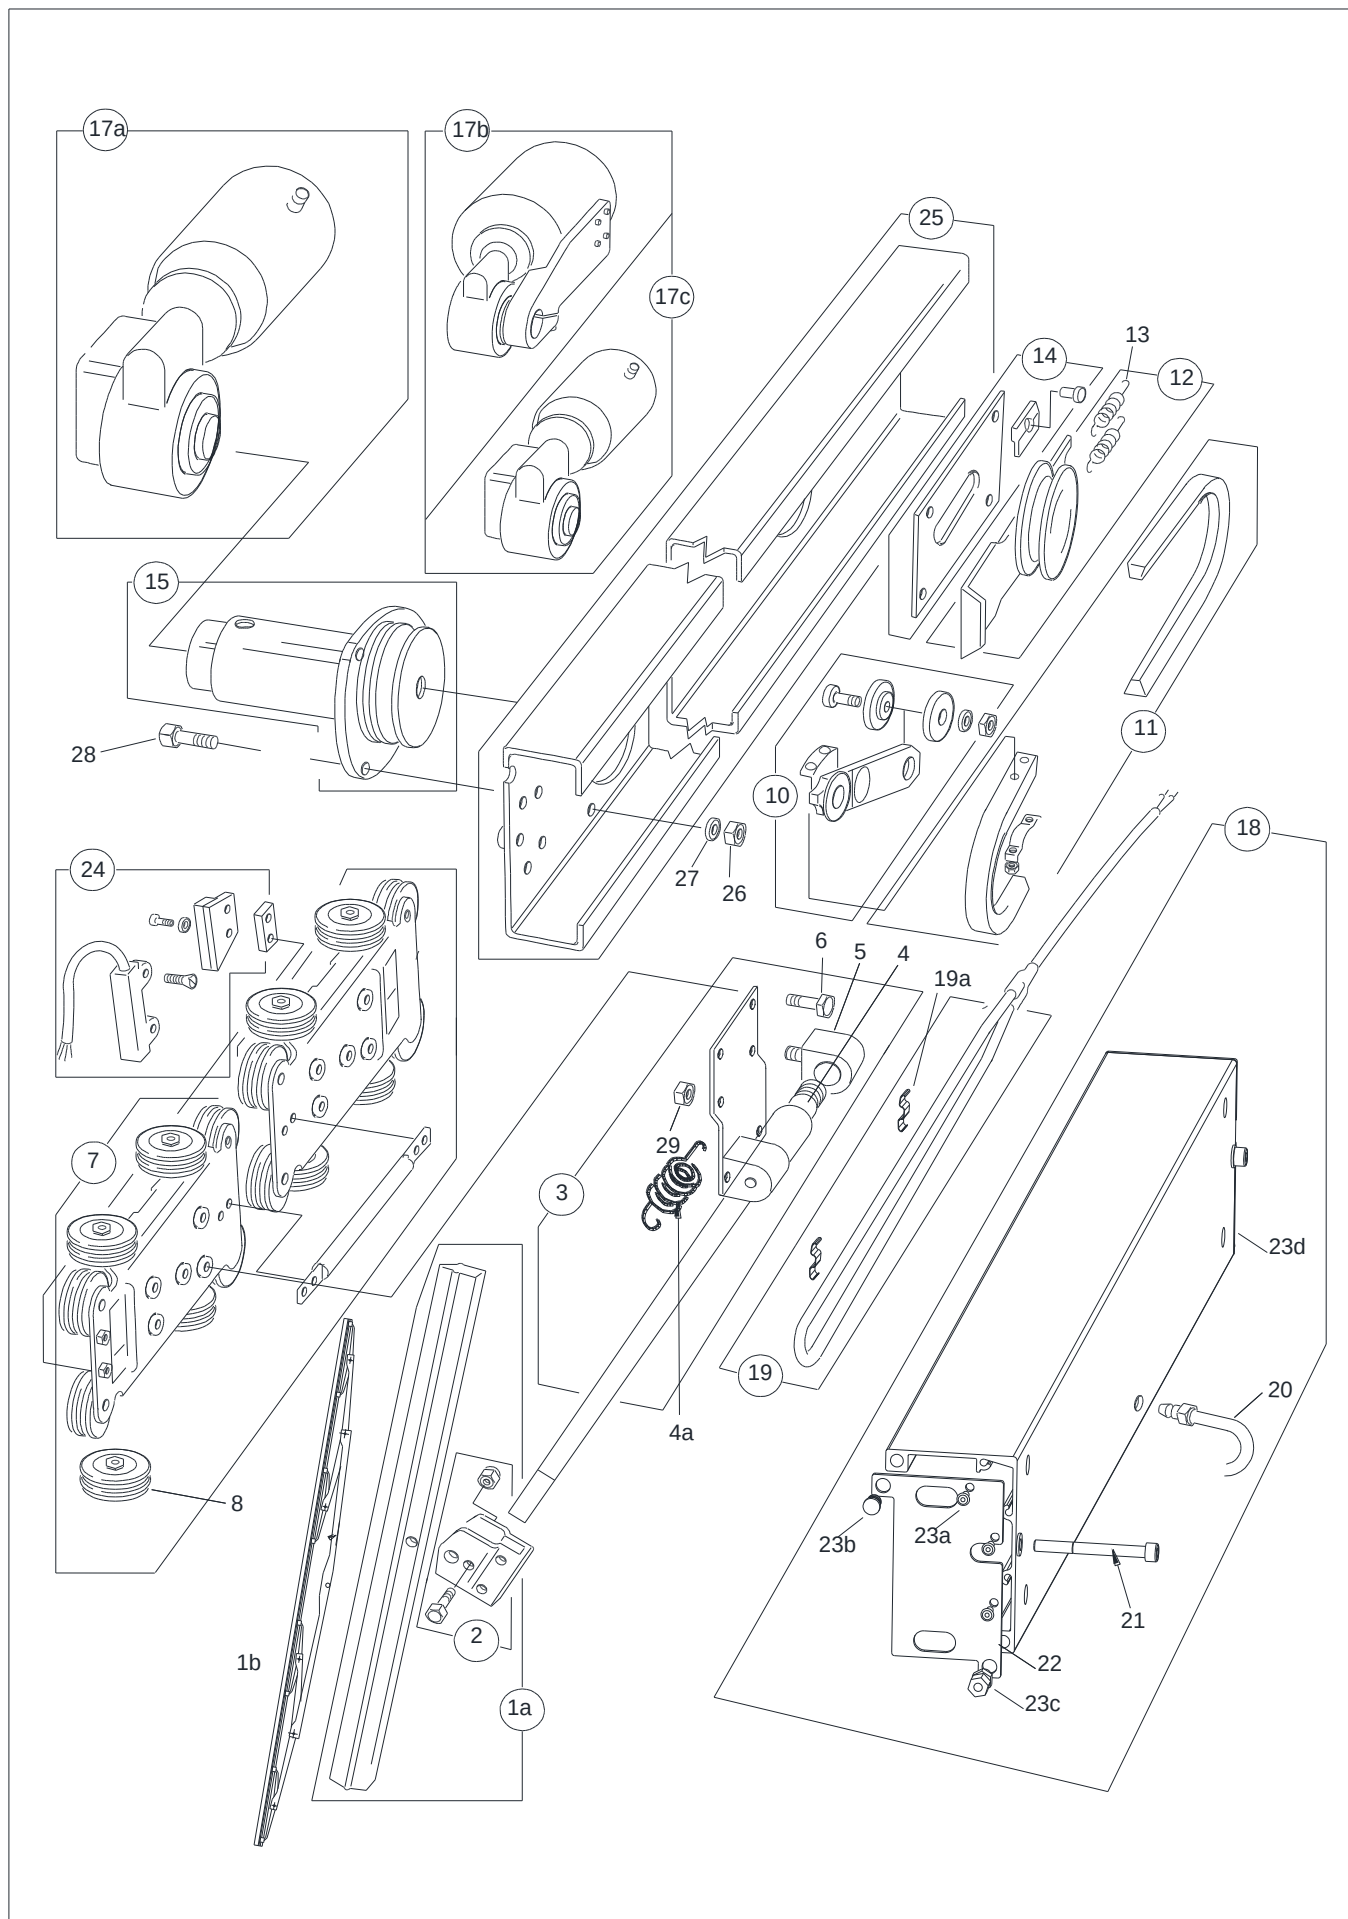

Type C Common Cover Twin Spare Parts Drawing (Long)

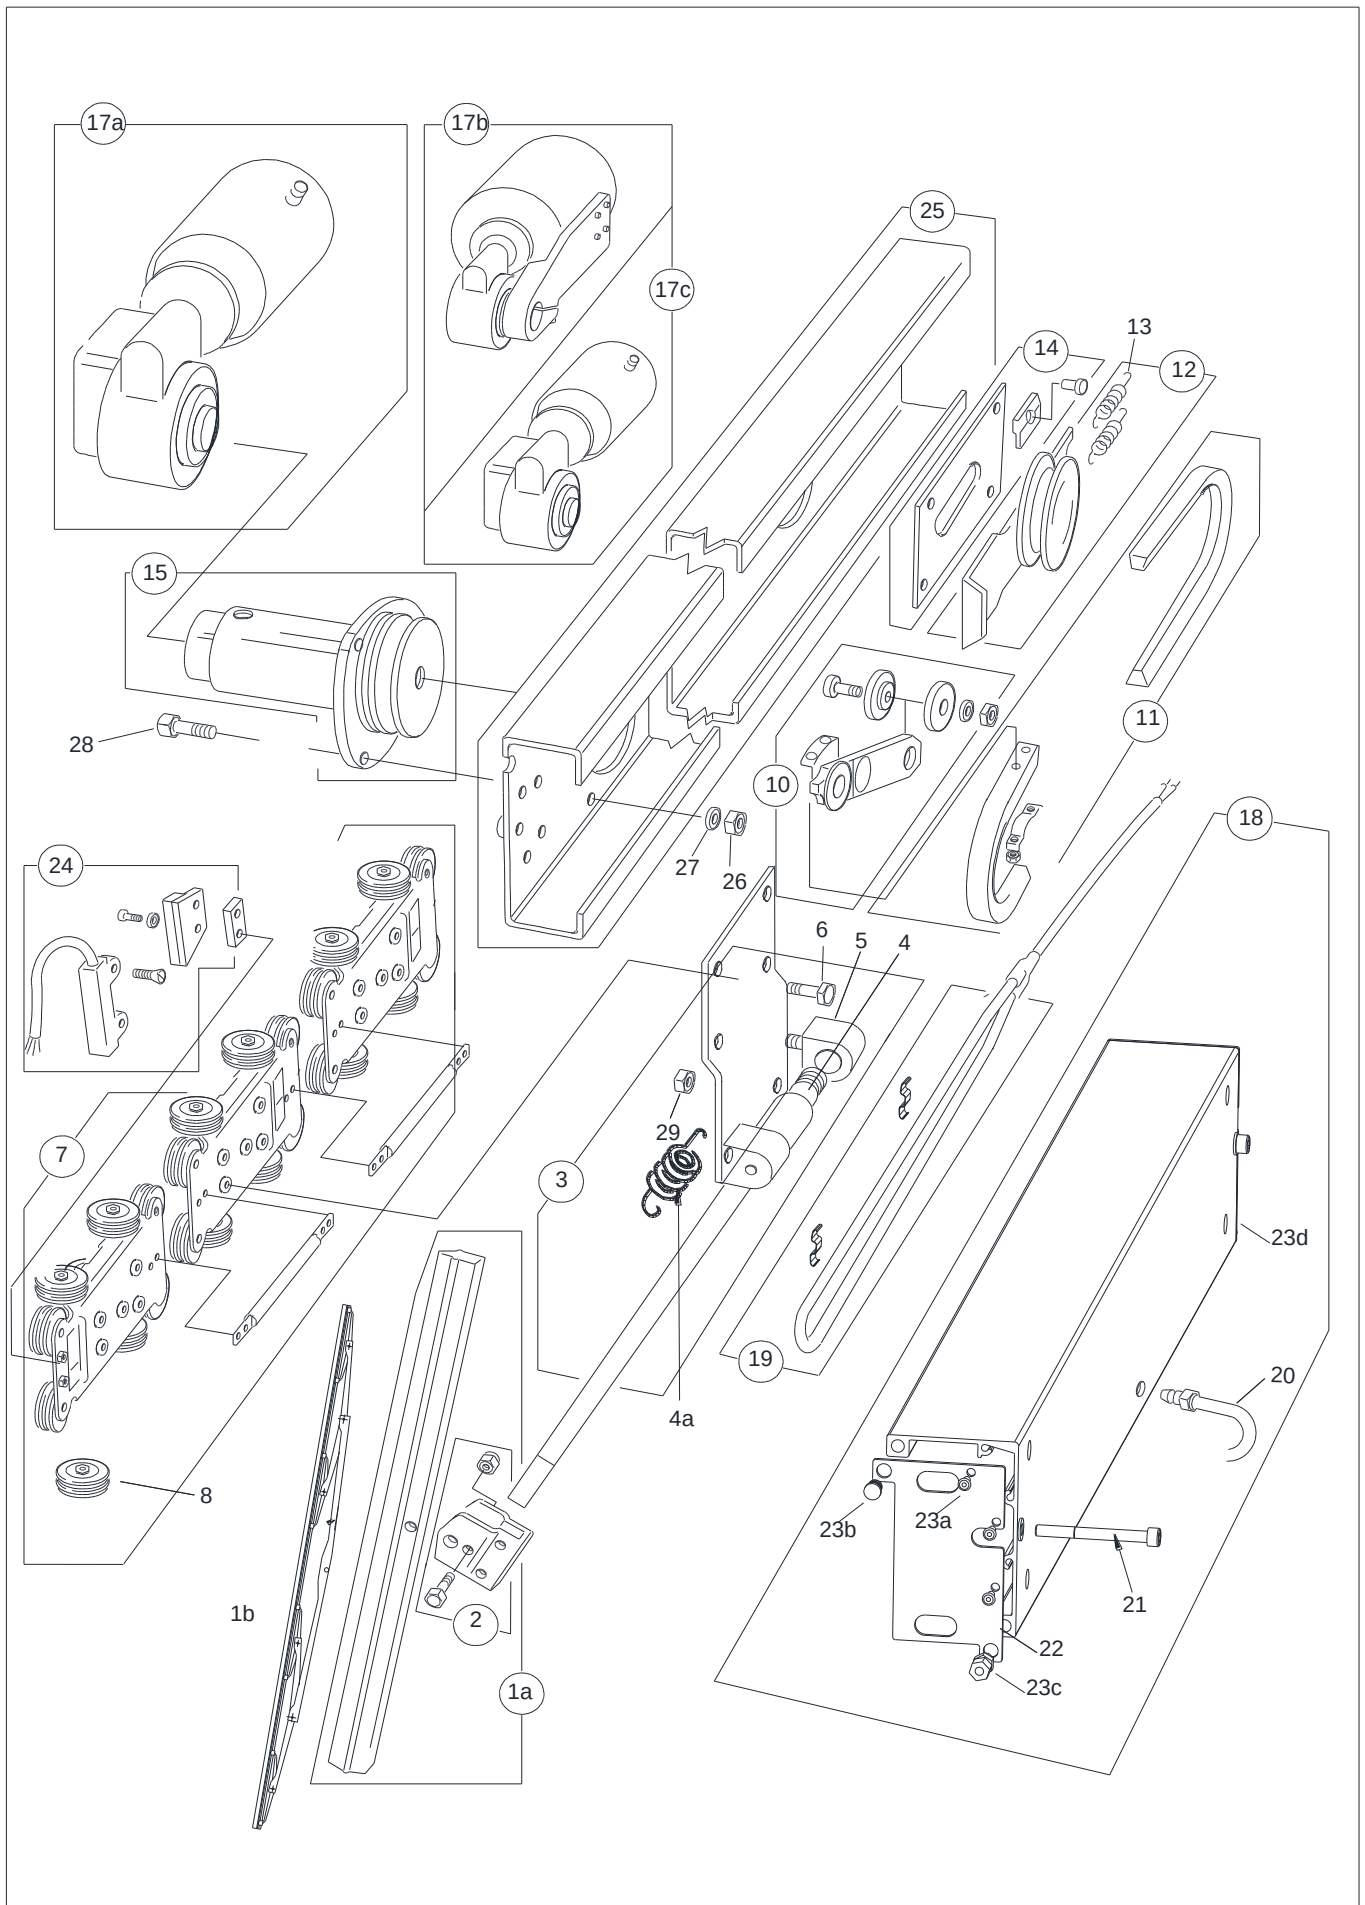


SLW Wiper Arm

The wiper arm is manufactured from stainless steel.

The wiper arm is shown below. One wiper arm assembly is used on a single bladed wiper, two wiper arm assemblies on a twin bladed wiper and three wiper arm assemblies on a triple bladed wiper unit.

The wiper arm assembly mounts on to the wiper assembly carriage plate. The wiper arm is secured to the carriage plate via four 10mm long mounting bolts.

The blade is secured to the arm assembly using the blade clip arrangement fitted to the wiper blade.

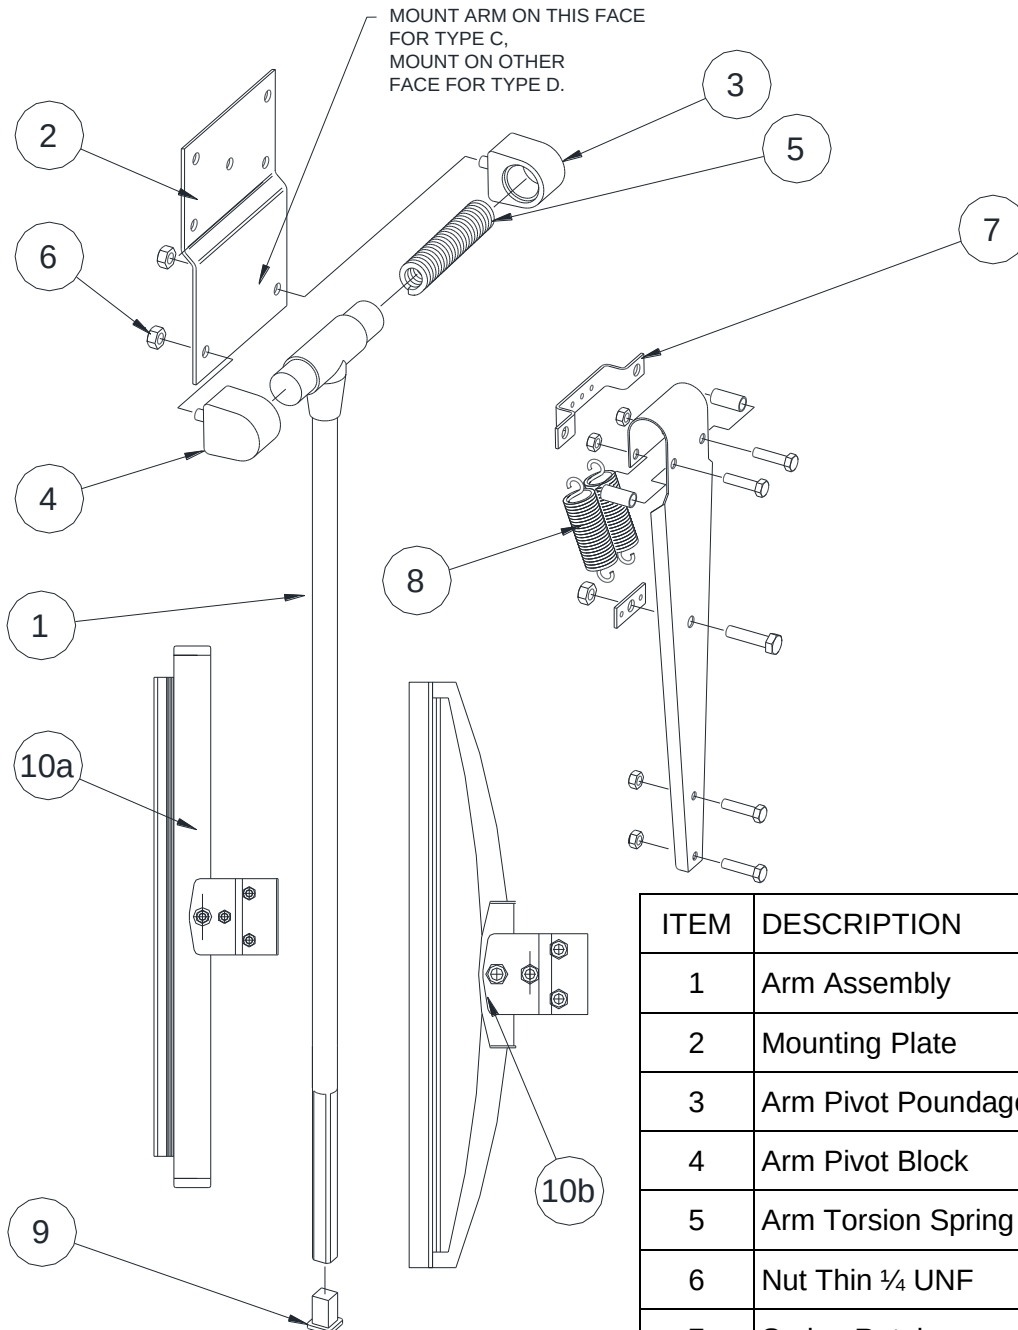

ITEM	DESCRIPTION	QTY
1	Arm Assembly	1
2	Mounting Plate	1
3	Arm Pivot Poundage Block	1
4	Arm Pivot Block	1
5	Arm Torsion Spring	1
6	Nut Thin ¼ UNF	2
7	Spring Retainer	1 (A/R)
8	Additional Spring	(0, 1, 2)
9	Sealing Plug	1
10a	Flat Blade	1
10b	Articulated Blade	

QUICK FIT SLW WIPER ARM INSTALLATION




CAUTION: Ensure that the correct wiper, blade and arms are selected for each window. The wiper arm should not be installed/removed without the spring retaining pin fitted.

Installation

NOTE: The wiper unit should be supplied with the arm mounting plate (4) already fitted. If it is not fitted, remove 2 x ¼ UNF Thin Nuts (2) and 2 x M6 washers (3) from the pivot block threads and remove the wiper arm sub assembly (5) from the arm mounting plate (4). Fit the arm mounting plate (4) to the wiper unit before installing the wiper unit.

1. Remove 2 x ¼ UNF Thin Nuts (2) and 2 x M6 washers (3) from the pivot block threads.
2. Fit the wiper blade to the wiper arm sub assembly (5), ensuring that the captive end of the wiper is at the top.
3. Fit the wiper arm sub assembly (5) to the arm mounting plate (4) ensuring that the wiper arm sub assembly pivot block nuts (6) sit inside the holes in the arm mounting plate (4). Refit the 2 x M6 washers (3) and 2 x ¼ UNF Thin Nuts (2) to the pivot block threads and tighten.
4. Gently lift the wiper arm away from the window and remove the spring retaining pin (1). Keep safe for future use.

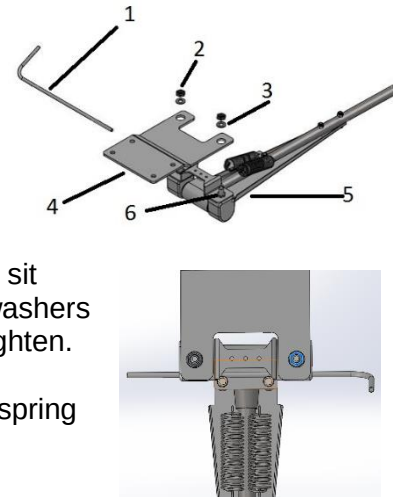

Arm Removal/Replacement

Removal

1. Gently lift the wiper arm away from the window and insert the spring retaining pin (1).
2. Remove 2 x ¼ UNF Thin Nuts (2) and 2 x M6 washers (3) from the pivot block threads. Keep safe for future use.
3. Remove the wiper arm sub assembly (5) from the arm mounting plate (4).

Replacement

1. Fit the wiper arm sub assembly (5) to the arm mounting plate (4) ensuring that the wiper arm sub assembly pivot block nuts (6) sit inside the holes in the arm mounting plate (4). Refit the 2 x M6 washers (3) and 2 x ¼ UNF Thin Nuts (2) to the pivot block threads and tighten.
2. Gently lift the wiper arm away from the window and remove the spring retaining pin (1). Keep safe for future use.


SLW Double Wiper Arm Assembly

The wiper arm is manufactured from stainless steel.

The wiper arm is shown below. One wiper arm assembly is used on a single bladed wiper, two wiper arm assemblies on a twin bladed wiper.

The double wiper arm mounting plate is secured to the wiper arm mounting plate with two bolts, washers and nuts. The complete wiper arm assembly mounts on to the wiper assembly carriage plate. The wiper arm is secured to the carriage plate via four 10mm long mounting bolts.

The blade is secured to the arm assembly using the blade clip arrangement fitted to the wiper blade.

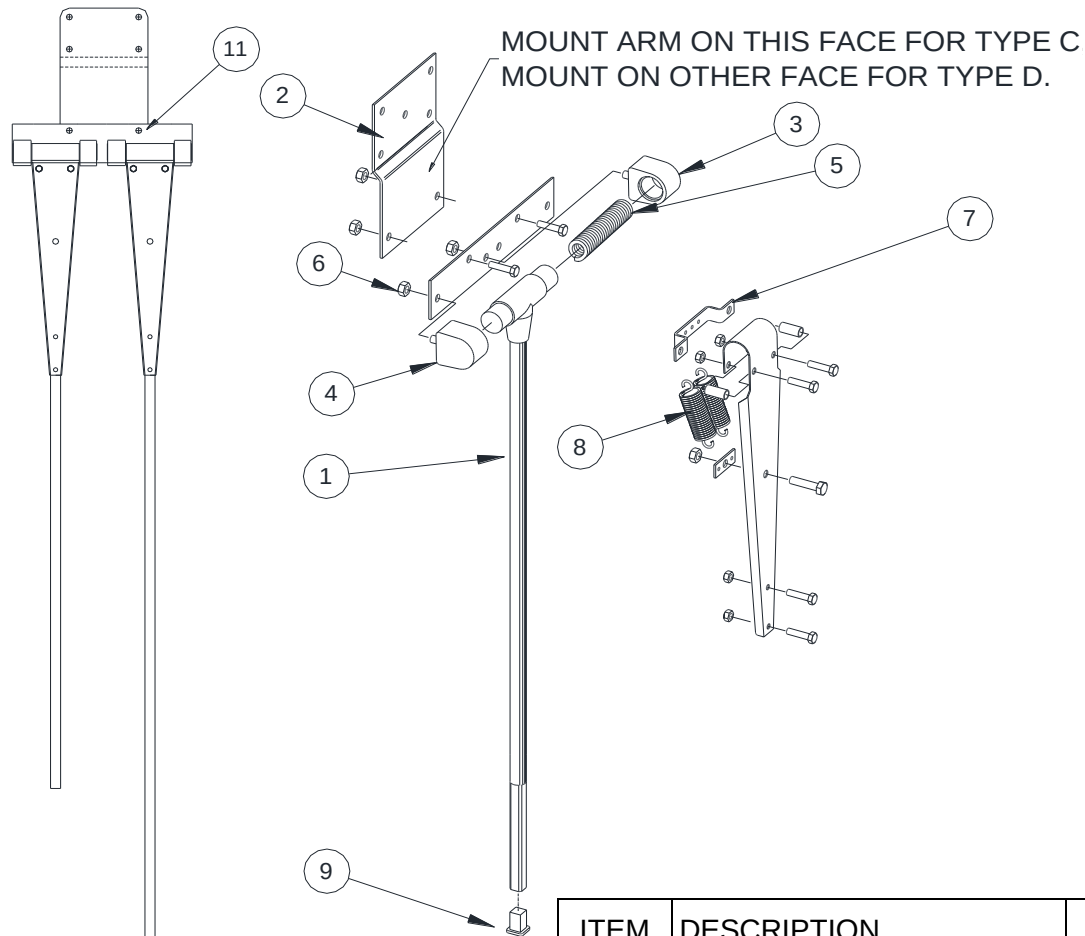

VIEWED FROM OUTSIDE

ITEM	DESCRIPTION	QTY
1	Arm Assembly	2
2	Mounting Plate	1
3	Arm Pivot Poundage Block	2
4	Arm Pivot Block	2
5	Arm Torsion Spring	2
6	Nut Thin ¼ UNF	4
7	Spring Retainer	2(A/R)
8	Additional Spring (per arm)	(0, 1, 2)
9	Sealing Plug	2
11	Double Arm Mtg Plate	2


SLW Heavy Duty Wiper Arm Assembly – 600-950mm

The wiper arm is manufactured from stainless steel.

The wiper arm is shown below. One wiper arm assembly is used on a single bladed wiper.

The heavy duty wiper arm mounting plate is secured to the wiper arm mounting plate with two bolts, washers and nuts. The complete wiper arm assembly mounts on to the wiper assembly carriage plate. The wiper arm is secured to the carriage plate via four 10mm long mounting bolts.

The blade is secured to the arm assembly using the blade clip arrangement fitted to the wiper blade.

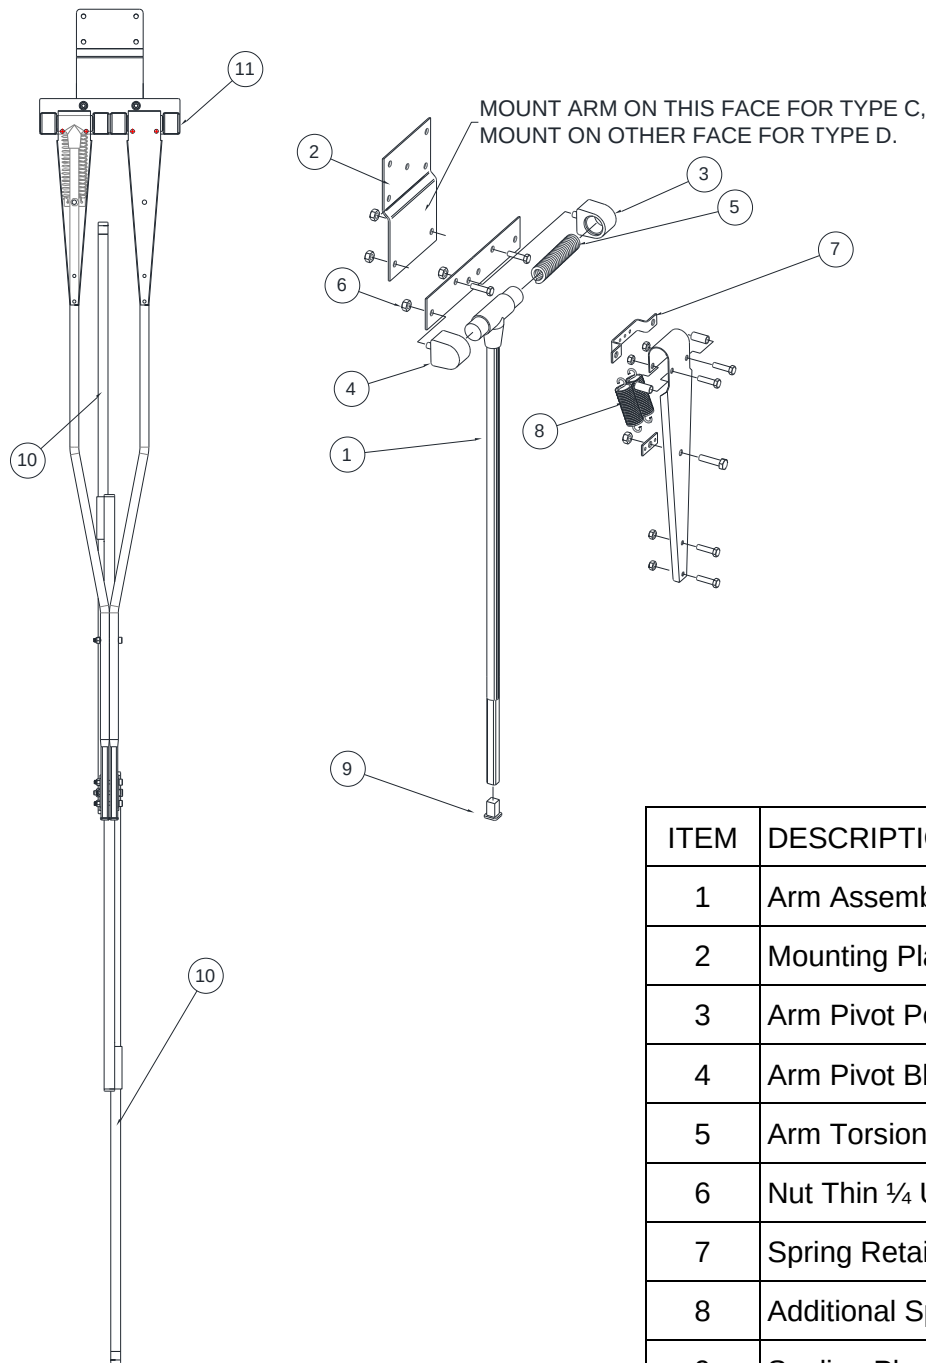

ITEM	DESCRIPTION	QTY
1	Arm Assembly	2
2	Mounting Plate	1
3	Arm Pivot Poundage Block	2
4	Arm Pivot Block	2
5	Arm Torsion Spring	2
6	Nut Thin ¼ UNF	4
7	Spring Retainer	2
8	Additional Spring (per arm)	2
9	Sealing Plug	2
10	Flat Blade	2
11	Double Arm Mtg Plate	2

SLW Heavy Duty Wiper Arm Assembly – 1000-1150mm


The wiper arm is manufactured from stainless steel.

The wiper arm is shown below. One wiper arm assembly is used on a single bladed wiper.

The heavy duty wiper arm mounting plate is secured to the wiper arm mounting plate with two bolts, washers and nuts. The complete wiper arm assembly mounts on to the wiper assembly carriage plate. The wiper arm is secured to the carriage plate via four 10mm long mounting bolts.

The blade is secured to the arm assembly using the blade clip arrangement fitted to the wiper blade.

The arm is fitted with an Anti-Drop plate. This can be adjusted to provide addition pressure to the wiper blade.

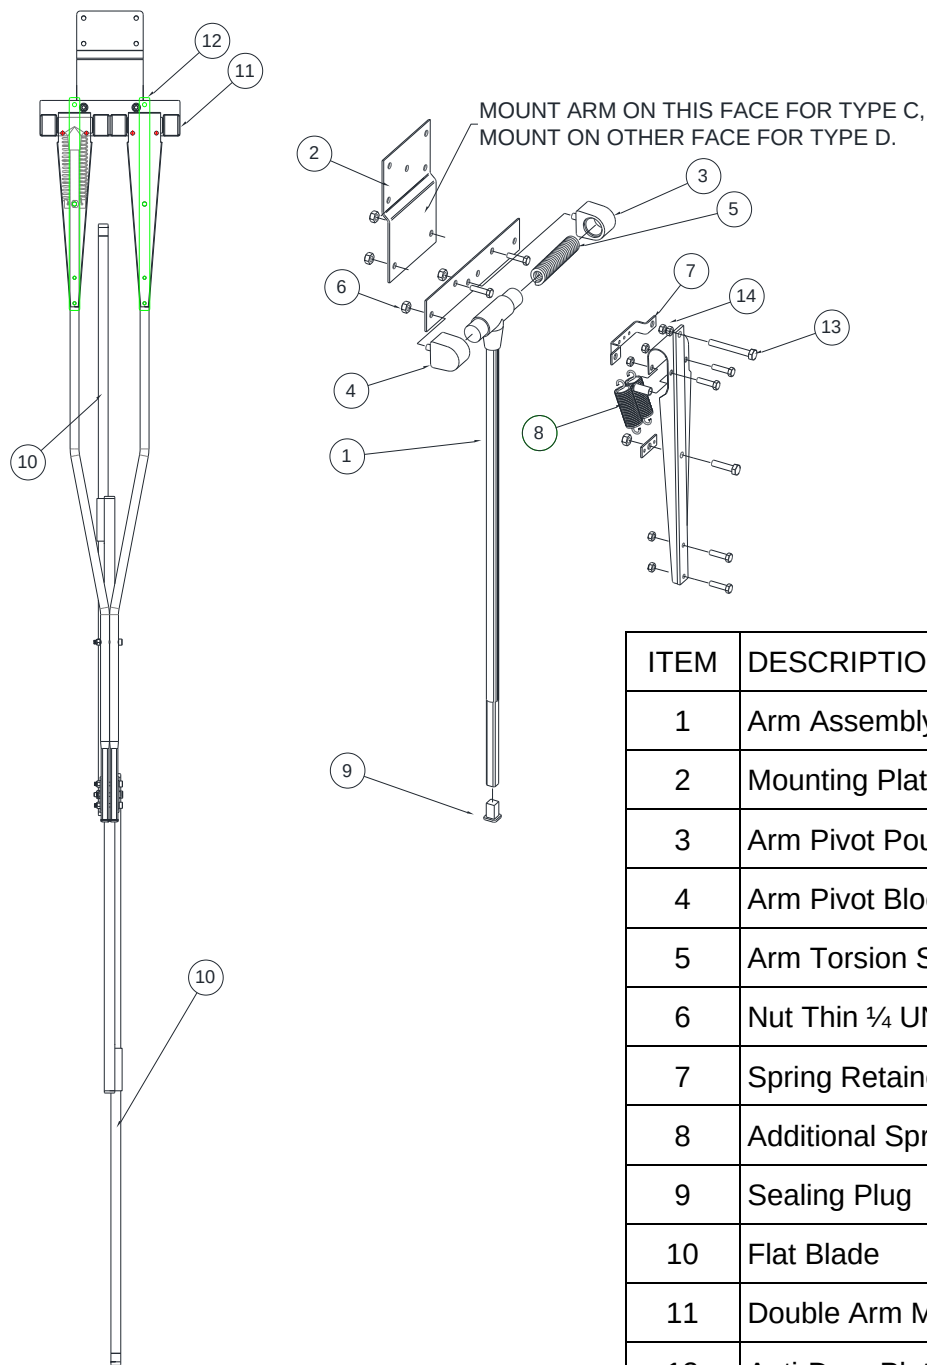

OUTSIDE LOOKING IN

ITEM	DESCRIPTION	QTY
1	Arm Assembly	2
2	Mounting Plate	1
3	Arm Pivot Poundage Block	2
4	Arm Pivot Block	2
5	Arm Torsion Spring	2
6	Nut Thin ¼ UNF	4
7	Spring Retainer	2
8	Additional Spring (per arm)	3
9	Sealing Plug	2
10	Flat Blade	2
11	Double Arm Mtg Plate	2
12	Anti-Drop Plate	2
13	Adjustment Bolt	2
14	Lock Nuts	4


FITTING THE WIPER BLADE CARRIER

The wiper blades should be changed every 12 months but this is dependent on use and operating conditions

Ref Figure – Dual Blade Clip

1. Remove one M6 blade retaining bolt (1), two M6 flat washers (2), and M6 Nylock nut (3), from blade clip on double wiper arm assy (10).
2. Place dual blade carrier assy (5), into blade clip on Arm (10).
3. Ensure that all fixing holes align.
4. Secure in place with one M6 blade retaining bolt (1), two M6 flat washers (2), and M6 Nylock nut (3).

Figure – Dual Blade Clip

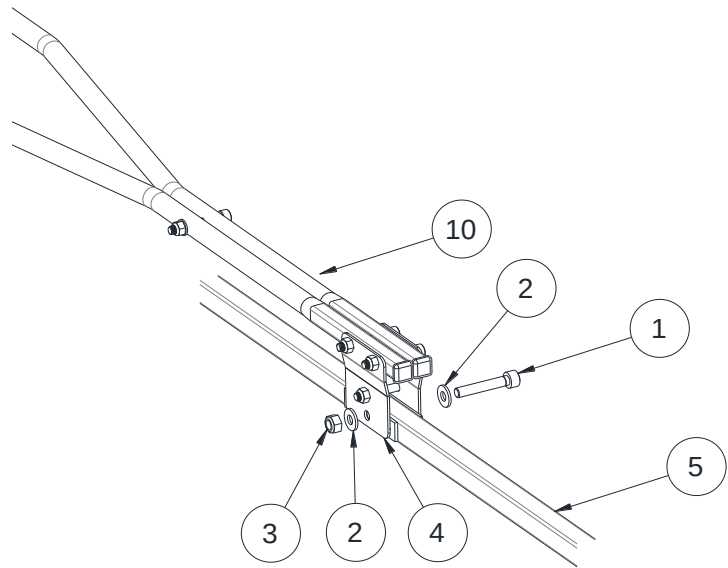

IMPORTANT


DO NOT over tighten blade carrier retaining bolt and nut, as blade carrier is required to pivot on glass.

Ref Figure – Nut Tightening

5. Secure nut until tight – then 1/4 turn back

Figure – Nut Tightening

Secure nut
until tight 1/4 turn back

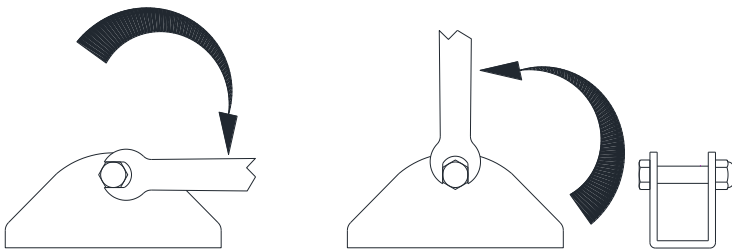

NOTE

Pictorial representation only, May not be exact to supplied arm

EXAMPLE
NUMBER

D 5 1 1 1 1 A 1 C E B A 1 A - -

WIPER TYPE	CODE
D1	D1
D2	D2
D3	D3
D4	D4
D5	D5
C1	C1
C2	C2
C3	C3
C4	C4
C5	C5
C6	C6
C7	C7
C8	C8
C9	C9

STROKE TYPE	CODE
Single	1
Twin	2
Special Twin Case (Non-std crs)	Q
Special Single (See Instructions)	S
Special Twin (See Instructions)	T
Type C Single Old Style Cse/Cvr	3
Type C Single Old Style Cse/Cvr	4
Type C Twin Old Style Cse/Cvr	5
Type D Twin Old Style Cse/Cvr	6
Type 76 Converted to Type D	7

TWIN STROKE LENGTH STANDARD			
1 INCH (25MM) STROKE OVERLAP			
INCHES	MILLIMETRES	CODE	
2 X 13	2 X 330	13	
2 X 14	2 X 356	14	
2 X 15	2 X 380	15	
2 X 16	2 X 407	16	
2 X 17	2 X 430	17	
2 X 18	2 X 457	18	
2 X 19	2 X 480	19	
2 X 20	2 X 510	20	
2 X 21	2 X 533	21	
2 X 22	2 X 558	22	
2 X 23	2 X 583	23	
2 X 24	2 X 610	24	
2 X 25	2 X 635	25	
2 X 26	2 X 660	26	
2 X 27	2 X 685	27	
2 X 28	2 X 710	28	
2 X 29	2 X 735	29	
2 X 30	2 X 760	30	
2 X 31	2 X 787	31	
2 X 32	2 X 810	32	
2 X 33	2 X 835	33	
2 X 34	2 X 865	34	
2 X 35	2 X 890	35	
2 X 36	2 X 915	36	
2 X 37	2 X 940	37	
2 X 38	2 X 965	38	
2 X 39	2 X 990	39	
2 X 40	2 X 1015	40	
2 X 41	2 X 1040	41	
2 X 42	2 X 1065	42	
2 X 43	2 X 1095	43	
2 X 44	2 X 1125	44	
2 X 45	2 X 1145	45	
2 X 46	2 X 1185	46	
2 X 47	2 X 1215	47	
2 X 48	2 X 1245	48	
2 X 49	2 X 1275	49	
2 X 50	2 X 1305	50	
2 X 51	2 X 1335	51	
2 X 52	2 X 1365	52	
2 X 53	2 X 1400	53	
2 X 54	2 X 1450	54	
2 X 55	2 X 1500	55	
2 X 56	2 X 1560	56	
2 X 57	2 X 1610	57	
2 X 58	2 X 1660	58	
2 X 59	2 X 1710	59	
2 X 60	2 X 1760	60	
2 X 61	2 X 1800	61	
2 X 62	2 X 1830	62	
2 X 63	2 X 1860	63	
2 X 64	2 X 1890	64	
2 X 65	2 X 1920	65	
2 X 66	2 X 1950	66	
2 X 67	2 X 1980	67	
2 X 68	2 X 2010	68	
2 X 69	2 X 2040	69	
2 X 70	2 X 2070	70	
2 X 71	2 X 2100	71	
2 X 72	2 X 2130	72	
2 X 73	2 X 2160	73	
2 X 74	2 X 2190	74	
2 X 75	2 X 2220	75	
2 X 76	2 X 2250	76	
2 X 77	2 X 2280	77	
2 X 78	2 X 2310	78	
2 X 79	2 X 2340	79	
2 X 80	2 X 2370	80	
2 X 81	2 X 2400	81	
2 X 82	2 X 2430	82	
2 X 83	2 X 2460	83	
2 X 84	2 X 2490	84	
2 X 85	2 X 2520	85	
2 X 86	2 X 2550	86	
2 X 87	2 X 2580	87	
2 X 88	2 X 2610	88	
2 X 89	2 X 2640	89	
2 X 90	2 X 2670	90	
2 X 91	2 X 2700	91	
2 X 92	2 X 2730	92	
2 X 93	2 X 2760	93	
2 X 94	2 X 2790	94	
2 X 95	2 X 2820	95	
2 X 96	2 X 2850	96	
2 X 97	2 X 2880	97	
2 X 98	2 X 2910	98	
2 X 99	2 X 2940	99	
2 X 100	2 X 2970	100	
2 X 101	2 X 3000	101	
2 X 102	2 X 3030	102	
2 X 103	2 X 3060	103	
2 X 104	2 X 3090	104	
2 X 105	2 X 3120	105	
2 X 106	2 X 3150	106	
2 X 107	2 X 3180	107	
2 X 108	2 X 3210	108	
2 X 109	2 X 3240	109	
2 X 110	2 X 3270	110	
2 X 111	2 X 3300	111	
2 X 112	2 X 3330	112	
2 X 113	2 X 3360	113	
2 X 114	2 X 3390	114	
2 X 115	2 X 3420	115	
2 X 116	2 X 3450	116	
2 X 117	2 X 3480	117	
2 X 118	2 X 3510	118	
2 X 119	2 X 3540	119	
2 X 120	2 X 3570	120	
2 X 121	2 X 3600	121	
2 X 122	2 X 3630	122	
2 X 123	2 X 3660	123	
2 X 124	2 X 3690	124	
2 X 125	2 X 3720	125	
2 X 126	2 X 3750	126	
2 X 127	2 X 3780	127	
2 X 128	2 X 3810	128	
2 X 129	2 X 3840	129	
2 X 130	2 X 3870	130	
2 X 131	2 X 3900	131	
2 X 132	2 X 3930	132	
2 X 133	2 X 3960	133	
2 X 134	2 X 3990	134	
2 X 135	2 X 4020	135	
2 X 136	2 X 4050	136	
2 X 137	2 X 4080	137	
2 X 138	2 X 4110	138	
2 X 139	2 X 4140	139	
2 X 140	2 X 4170	140	
2 X 141	2 X 4200	141	
2 X 142	2 X 4230	142	
2 X 143	2 X 4260	143	
2 X 144	2 X 4290	144	
2 X 145	2 X 4320	145	
2 X 146	2 X 4350	146	
2 X 147	2 X 4380	147	
2 X 148	2 X 4410	148	
2 X 149	2 X 4440	149	
2 X 150	2 X 4470	150	
2 X 151	2 X 4500	151	
2 X 152	2 X 4530	152	
2 X 153	2 X 4560	153	
2 X 154	2 X 4590	154	
2 X 155	2 X 4620	155	
2 X 156	2 X 4650	156	
2 X 157	2 X 4680	157	
2 X 158	2 X 4710	158	
2 X 159	2 X 4740	159	
2 X 160	2 X 4770	160	
2 X 161	2 X 4800	161	
2 X 162	2 X 4830	162	
2 X 163	2 X 4860	163	
2 X 164	2 X 4890	164	
2 X 165	2 X 4920	165	
2 X 166	2 X 4950	166	
2 X 167	2 X 4980	167	
2 X 168	2 X 5010	168	
2 X 169	2 X 5040	169	
2 X 170	2 X 5070	170	
2 X 171	2 X 5100	171	
2 X 172	2 X 5130	172	
2 X 173	2 X 5160	173	
2 X 174	2 X 5190	174	
2 X 175	2 X 5220	175	
2 X 176	2 X 5250	176	
2 X 177	2 X 5280	177	
2 X 178	2 X 5310	178	
2 X 179	2 X 5340	179	
2 X 180	2 X 5370	180	
2 X 181	2 X 5400	181	
2 X 182	2 X 5430	182	
2 X 183	2 X 5460	183	
2 X 184	2 X 5490	184	
2 X 185	2 X 5520	185	
2 X 186	2 X 5550	186	
2 X 187	2 X 5580	187	
2 X 188	2 X 5610	188	
2 X 189	2 X 5640	189	
2 X 190	2 X 5670	190	
2 X 191	2 X 5700	191	
2 X 192	2 X 5730	192	
2 X 193	2 X 5760	193	
2 X 194	2 X 5790	194	
2 X 195	2 X 5820	195	
2 X 196	2 X 5850	196	
2 X 197	2 X 5880	197	
2 X 198	2 X 5910	198	
2 X 199	2 X 5940	199	
2 X 200	2 X 5970	200	
2 X 201	2 X 6000	201	
2 X 202	2 X 6030	202	
2 X 203	2 X 6060	203	
2 X 204	2 X 6090	204	
2 X 205	2 X 6120	205	
2 X 206	2 X 6150	206	
2 X 207	2 X 6180	207	
2 X 208	2 X 6210	208	
2 X 209	2 X 6240	209	
2 X 210	2 X 6270	210	
2 X 211	2 X 6300	211	
2 X 212	2 X 6330	212	
2 X 213	2 X 6360	213	
2 X 214	2 X 6390	214	
2 X 215	2 X 6420	215	
2 X 216	2 X 6450	216	
2 X 217	2 X 6480	217	
2 X 218	2 X 6510	218	
2 X 219	2 X 6540	219	
2 X 220	2 X 6570	220	
2 X 221	2 X 6600	221	
2 X 222	2 X 6630	222	
2 X 223	2 X 6660	223	
2 X 224	2 X 6690	224	
2 X 225	2 X 6720	225	
2 X 226	2 X 6750	226	
2 X 227	2 X 6780	227	
2 X 228	2 X 6810	228	
2 X 229	2 X 6840	229	
2 X 230	2 X 6870	230	
2 X 231	2 X 6900	231	
2 X 232	2 X 6930	232	
2 X 233	2 X 6960	233	
2 X 234	2 X 6990	234	
2 X 235	2 X 7020	235	
2 X 236	2 X 7050	236	
2 X 237	2 X 7080	237	
2 X 238	2 X 7110	238	
2 X 239	2 X 7140	239	
2 X 240	2 X 7170	240	
2 X 241	2 X 7200	241	
2 X 242	2 X 7230	242	
2 X 243	2 X 7260	243	
2 X 244	2 X 7290	244	
2 X 245	2 X 7320	245	
2 X 246	2 X 7350	246	
2 X 247	2 X 7380	247	
2 X 248	2 X 7410	248	
2 X 249	2 X 7440	249	
2 X 250	2 X 7470	250	
2 X 251	2 X 7500	251	
2 X 252	2 X 7530	252	
2 X 253	2 X 7560	253	
2 X 254	2 X 7590	254	
2 X 255	2 X 7620	255	
2 X 256	2 X 7650	256	
2 X 257	2 X 7680	257	
2 X 258	2 X 7710	258	
2 X 259	2 X 7740	259	
2 X 260	2 X 7770	260	
2 X 261	2 X 7800	261	
2 X 262	2 X 7830	262	
2 X 263	2 X 7860	263	
2 X 264	2 X 7890	264	
2 X 265	2 X 7920	265	
2 X 266	2 X 7950	266	
2 X 267	2 X 7980	267	
2 X 268	2 X 8010	268	
2 X 269	2 X 8040	269	
2 X 270	2 X 8070	270	
2 X 271	2 X 8100	271	
2 X 272	2 X 8130	272	
2 X 273	2 X 8160	273	
2 X 274	2 X 8190	274	
2 X 275	2 X 8220	275	
2 X 276	2 X 8250	276	
2 X 277	2 X 8280	277	
2 X 278	2 X 8310	278	
2 X 279	2 X 8340	279	
2 X 280	2 X 8370	280	
2 X 281	2 X 8400	281	
2 X 282	2 X 8430	282	
2 X 283	2 X 8460	283	
2 X 284	2 X 8490	284	
2 X 285	2 X 8520	285	
2 X 286	2 X 8550	286	
2 X 287	2 X 8580	287	
2 X 288	2 X 8610	288	
2 X 289	2 X 8640	289	
2 X 290	2 X 8670	290	
2 X 291	2 X 8700	291	
2 X 292	2 X 8730	292	
2 X 293	2 X 8760	293	
2 X 294	2 X 8790	294	
2 X 295	2 X 8820	295	
2 X 296	2 X 8850	296	
2 X 297	2 X 8880	297	
2 X 298	2 X 8910	298	
2 X 299	2 X 8940	299	
2 X 300	2 X 8970	300	
2 X 301	2 X 9000	301	
2 X 302	2 X 9030	302	
2 X 303	2 X 9060	303	
2 X 304	2 X 9090	304	
2 X 305	2 X 9120	305	
2 X 306	2 X 9150	306	
2 X 307	2 X 9180	307	
2 X 308	2 X 9210	308	
2 X 309	2 X 9240	309	
2 X 310	2 X 9270	310	
2 X 311	2 X 9300	311	
2 X 312	2 X 9330	312	
2 X 313	2 X 9360	313	
2 X 314	2 X 9390	314	
2 X 315	2 X 9420	315	
2 X 316	2 X 9450	316	
2 X 317	2 X 9480	317	
2 X 318	2 X 9510	318	
2 X 319	2 X 9540	319	
2 X 320	2 X 9570	320	
2 X 321	2 X 9600	321	
2 X 322	2 X 9630	322	
2 X 323	2 X 9660	323	
2 X 324	2 X 9690	324	
2 X 325	2 X 9720	325	
2 X 326	2 X 9750	326	
2 X 327	2 X 9780	327	
2 X 328	2 X 9810	328	
2 X 329	2 X 9840	329	
2 X 330	2 X 9870	330	
2 X 331	2 X 9900	331	
2 X 332	2 X 9930	332	
2 X 333	2 X 9960	33	

COVER/ CASE	CODE
COVER	-1
CASE	-2
COVER	-3
old style C	
COVER	4
old style D	

TWIN STROKE LENGTH STANDARD	
1 INCH (25MM) STROKE OVERLAP	STROKE CODE
2 X 13	2 X 330
2 X 14	2 X 356
2 X 15	2 X 380
2 X 16	2 X 407
2 X 17	2 X 430
2 X 18	2 X 457
2 X 19	2 X 480
2 X 20	2 X 510
2 X 21	2 X 533
2 X 22	2 X 558
2 X 23	2 X 585
2 X 24	2 X 610
2 X 25	2 X 635
2 X 26	2 X 660
2 X 27	2 X 685
2 X 28	2 X 710
2 X 29	2 X 735
2 X 30	2 X 760
2 X 31	2 X 787
2 X 32	2 X 810
2 X 34	2 X 865
2 X 36	2 X 915
2 X 40	2 X 1015
2 X 41	2 X 1040
2 X 43	2 X 1095
2 X 45	2 X 1145
2 X 47	2 X 1195
2 X 49	2 X 1245
2 X 52	2 X 1335
2 X 57	2 X 1450
2 X 61	2 X 1560
2 X 67	2 X 1700
2 X 71	2 X 1800
2 X 76	2 X 1930
2 X 79	2 X 2005
SPECIAL TWIN	
ST	
(for twins, eg: 2x24" is shown as 24 with the 2 being stated at the previous part number digit)	

HEATER CABLE LENGTH	CODE
Not Supplied	-0
2 Metres	-1
3 Metres	-7
5 Metres	-2
6 Metres	-8
8 Metres	-9
10 Metres	-3
15 Metres	-A
20 Metres	-4
25 Metres	-5
Terminated in Enclosure	-6

PARKING	CODE
Parking Not Filled	0
<u>Standard Drive End Parking</u>	
Normally open	) - A
Reed Switch (TYPE D)	
Normally open	) - B
Reed Switch (TYPE C)	
Proximity Switch (TYPE D)	- J
<u>Non-Standard Drive End Parking</u>	
Proximity Switch (TYPE D)	- G
Reed Switch Change over (Special Type C)	- C
<u>Standard Idler End Parking</u>	
Normally open	) - D
Reed Switch (TYPE D)	
Normally Open	) - E
Reed Switch (Type C)	)
<u>Non-Standard Idler End Parking</u>	
Proximity Switch (Type D)	- H
Reed Switch c/over (Special Type C)	- F

SPRAY	CODE
No Spray	-0
<u>Std Spray Fitted</u>	<u>-1</u>
Spray Std + Banjo	-2
Spray Jet S/Steel	-3
150mm Spray Jet	-4
SEE INST	-S
NOTE:	
SPRAY FITTED TO COVERS	
ONLY	
NO SPRAY ON 80, B OR 48	

WINDOW
HANDING

Not Supplied -0

LEFT	-1
RIGHT	-2

(above window)

MOUNTING	CODE
Std Boss - 24 O/A (1586-067)	A
Boss - 26 O/A (1586-820)	B
Bracket (1586-870 - Type C) (1642-870 - Type D)	C
Universal Carrier (1586-871 + 872)	D (DO NOT USE)
Boss - 64 O/A (1586-067-80)	E
Quick Release - No Plug (1642-468)	F
Quick Release and CVN Plug (1642-468) + (A-ELEC-701)	G
QUICK RELEASE ONLY (1588-647)	H
C-SHAPED BRACKET (1588-874 - Type C) (1642-874 - Type D)	J

Non-Standard Idler End Parking

USED ON:	THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.	
	 MARINE LIMITED CHELTENHAM	ENGLAND
	TITLE:- STRAIGHT LINE WIPER COVER/CASE SPARES PART NUMBER OPTIONS	
	DRAWING No.	1681-161
		SHEET 2 OF 2

SERIES 6000 CONTROL SYSTEM

The Series 6000 Network Control System contains a conductive dome switch keypad and wiper motor control modules that are available for 24V DC motors, AC single phase single speed motors and AC three phase two speed motors.

The Keypad

This is specially designed for marine applications and by using the latest modern electronics the system is very robust. The intermittent and wash cycle timings can be easily programmed from the keypad. The background illumination on the key icons can be dimmed to completely off.

Standard keypads are flush mounted into the Bridge Console, with one or two wiper speeds, three intermittent speeds, wash program, window and wiper case heat keys. Customised keypads are available on request.

It is recommended that the Wynn supplied PSU is used to provide a regulated, stabilised and independent power source for the bus. If an existing ships 24V supply is to be used then it must be galvanically isolated with a DC to DC converter, this is to reduce the effects of noise on the 0V line from the ships supply interfering with the bus communications. Each independent control system should have its own power supply.

The AC Wiper Motor Modules

These have a mains operating voltage of 110 or 230v AC at 50~60Hz 1 phase or 3 phase.

The wiper motor control modules are extremely flexible in the combination of functions they may control. They are factory configured to provide most combinations of wiper, wiper heater, wash/purge system and window heat control.

The wiper motor control modules have a group address so wipers can be selectively controlled from the keypad. They are pre-set in production but can also be reset by the customer.

Power for the wiper, heater or wash system is taken directly to the wiper motor control module adjacent to the wiper unit, with a keypad flush mounted into the Bridge Console.

Wiper motor control modules may be configured with a single AC input providing power to Motor, Heater, Wash and Air Purge; or may be provided with mixed supplies for 230 V AC Motors and 24 V AC or DC Heaters.

Two Control Module Types are available: The 6100 for Single Phase motors and 6300 for Three Phase motors.

Most modules are available with two additional outputs for wash, purge, case/arm heat and window heat. The module can only be configured for a maximum of one of each type of output.

The standard 6100 module has standard two additional outputs.

The extended 6100 module has four additional outputs.

The standard 6300 module has no additional outputs.

The extended 6300 module has two additional outputs.

The DC Wiper Motor Modules

These have an operating voltage of 24V DC.

A regulated and stabilised power source is recommend for the motor 24V DC supply. .

The wiper motor control modules have a group address so wipers can be selectively controlled from the keypad. They are pre-set in production but can also be reset by the customer.

The standard 6200 modules has only one additional output option. The output can be set by DIP switch for wash, purge, case/arm heat or window heat.

System Compatibility and Requirements

The systems comply with ISO 60945 ESD, EMC and environmental specifications.

Bus wiring is must consist of a twisted pair for the communication lines (Bus+, Bus-) and a twisted pair for the power lines (24V, 0V). The cable must comply with the DeviceNet specification and the communication pair have a characteristic impedance of 120 Ohms.

The cable size is dependent on the distance between the first keypad and furthest wiper module:-

Bus Length	Min Cable Size	
	Power	Data
Up to 100m	1.5 mm ² (15 AWG)	0.96mm ² (18 AWG)
Above 101m	2.5 mm ² (13 AWG)	0.96mm ² (18 AWG)

A terminating resistor module must be connected into the communication lines at the first keypad and a terminating resistor module must be connected across the communication lines at the last module.

Technical specifications

Input supply bus:	24Vdc +/- 2 V
Current consumption Keypad:	55mA
Current consumption Standard 6100/6300 Module:	65mA
Current consumption 6200 Module:	20mA
Current consumption Extended 6100/6300 Module:	110mA

INSTALLING DEVICENET BUS CABLES

General Guidelines

Bus cables should ideally be installed in their own steel cable channels or conduits. Plastic trunking provides no screening whatsoever: it is just a cable tidy. Basket type cable trays also do not provide screening.

If not installed in conduit bus cables should be brightly coloured and installed where they are clearly visible and separate from all other cables in order to improve any interference pickup and to avoid accidental damage.

When installing, it is important not to distort or damage bus cables since this can cause reflections to occur in the network. ***In particular, do not twist or stretch bus cables, do not squash or crimp them and adhere to the recommended minimum bend radius*** (typically stranded cables: 45mm for a single bend and 65mm for repeated bending).

Bus cable selection

The bus cable must comply with the DeviceNet specification and the communication pair have a characteristic impedance of 120 Ohms. DeviceNet spec cables provide data & power combined.

The cable size is dependent on the distance between the first keypad and furthest wiper module:-

Bus Length	Min Cable Size	
	Power	Data
Up to 100m	1.5 mm ² (15 AWG)	0.96mm ² (18 AWG)
Above 101m	2.5 mm ² (13 AWG)	0.96mm ² (18 AWG)

Suitable cables for bus systems up to 100m are:-


- a) Belden 3082A
- b) Leoni L45467-F21-W6
- c) SAB DN 656 Trunk Cable Pt No 06562781
- d) LAPP Unitronic Bus FD P DeviceNet Trunk Cable Pt No 2170 254
- e) LAPP Unitronic FD P DeviceNet Thick Pt No 2170 344
- f) LAPP Unitronic DeviceNet Thick Pt No 2170 340

Over 101m a separate, screened, power cable should be used.

All factory and relevant approvals testing has been completed using Belden 3082A cable. This is our recommend cable to use.

Screening balanced cables

DEVICENET RS-485 transmission is balanced to improve noise rejection. Therefore we should earth the cable screen at both ends to ensure that it is effective at high frequencies. This is normally done by connecting the cable screen to the device earth via the connectors. However, we must make sure that the device is correctly earthed. Poor shielding or earthing is a very common wiring error.

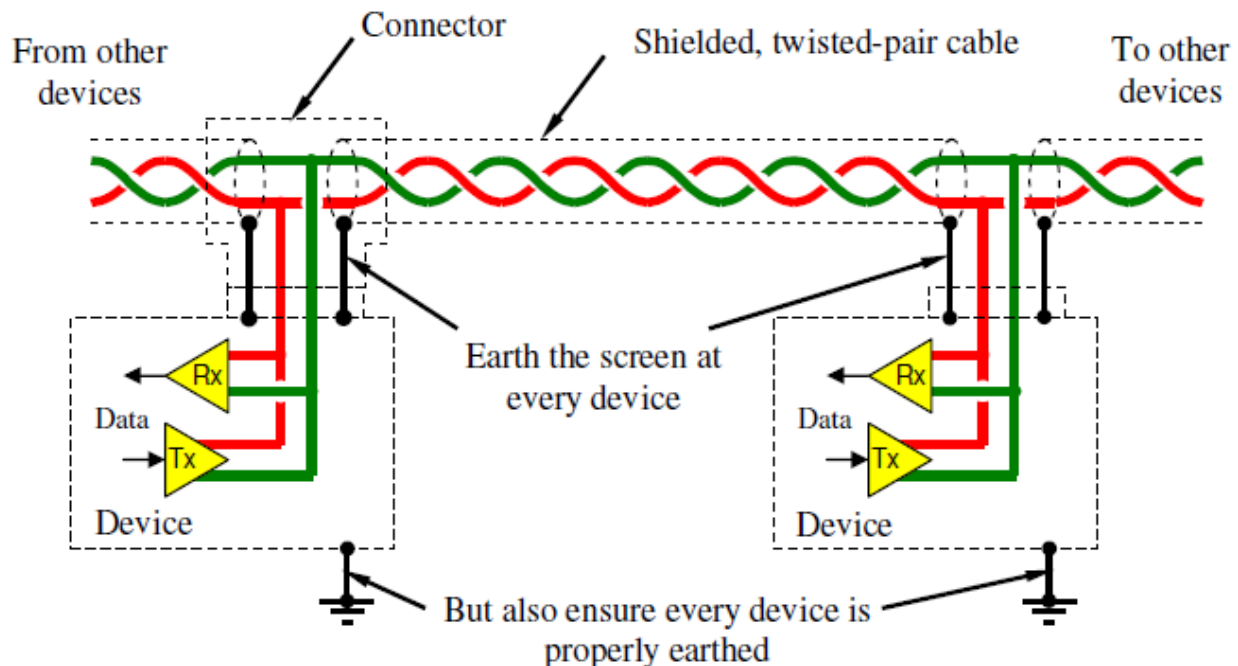

Cable Segregation

To reduce the chances of interference pickup, it is important that bus cables are run separately from other types of cable. It is useful to categorise various cable applications as follows:

Category I:

- Fieldbus and LAN cables (e.g. DeviceNet, Ethernet etc.).
- Shielded cables for digital data (e.g. printer, RS232 etc.).
- Shielded cables for low voltage ($\leq 25\text{V}$) analogue and digital signals.
- Low voltage power supply cables ($\leq 60\text{V}$).
- Coaxial signal cables

Category II:


- Cables carrying DC voltages $>60\text{V}$ and $\leq 400\text{V}$
- Cables carrying AC voltages $>25\text{V}$ and $\leq 400\text{V}$

Category III:

- Cables carrying DC or AC voltages $>400\text{V}$
- Cables with heavy currents.
- Motor/drive/inverter cables.
- Telephone cables (can have transients $>2000\text{V}$).

Category IV:

- Cables of categories I to III at risk from direct lightning strikes (e.g. connections between components in different buildings)

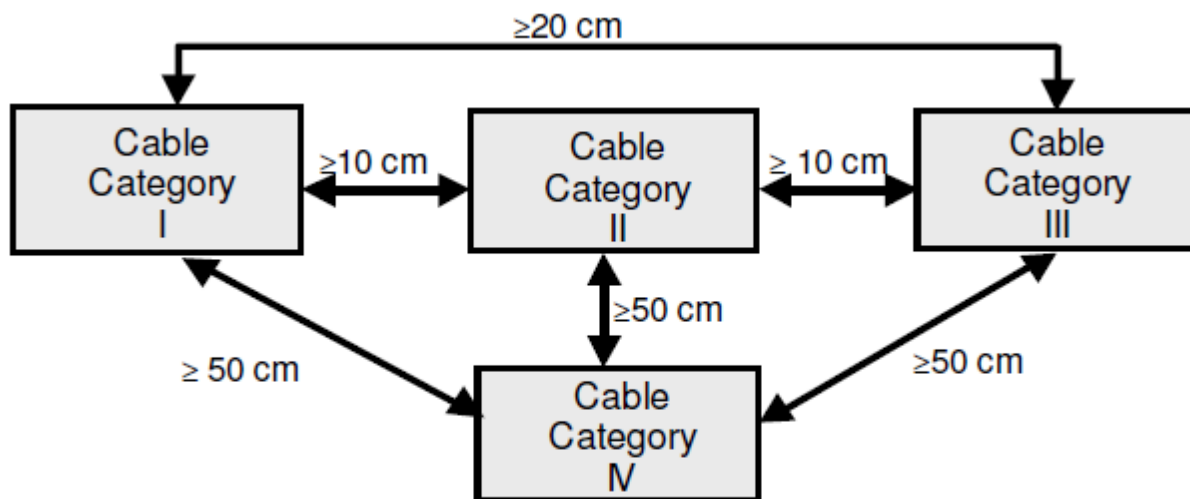


Separation distances for cables of different category

Sometimes it is impossible to adhere to the separation distances. Where cables have to cross, they should cross at right angles and should never run in parallel even for short distances.

Use of cable trays and channels

Cables from the same category can be bundled together or laid directly beside each other in the same cable trays. Cables of different category must be separated by at least the distances shown.

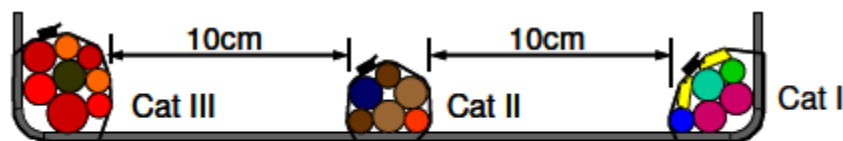

Cables mounted on a cable tray, rack or ladder must be separated by the recommended clearances

Common RS-485 wiring errors

It is common to find simple RS-485 wiring and layout errors in the field. The most frequently occurring errors are described below:

1. Termination problems:
 - a. Lack of bus terminations (6000-TR120) at the end of the bus.
2. Pickup and interference caused by:
 - a. Laying bus cables too close to electrically noisy power cables or equipment.
 - b. Lack of proper earthing of the cable screen at every device.
3. Wiring problems:
 - a. Wrong cable used.
 - b. Damaged cable (including squashed, over-bent)
 - c. Swapped cores at a device
 - d. Un-earthed screen (not connected at every device, un-earthed devices etc.)

TYPICAL BRIDGE LAYOUT

With slave panel, upto a maximum of 6 slaves.

Group 1

THIS DRAWING SHOWS THE LOGICAL
LAYOUT OF THE GROUP CONTROLS.


IT IS NOT A WIRING DIAGRAM.

Group 2

Group 3

Group 4

Group 5

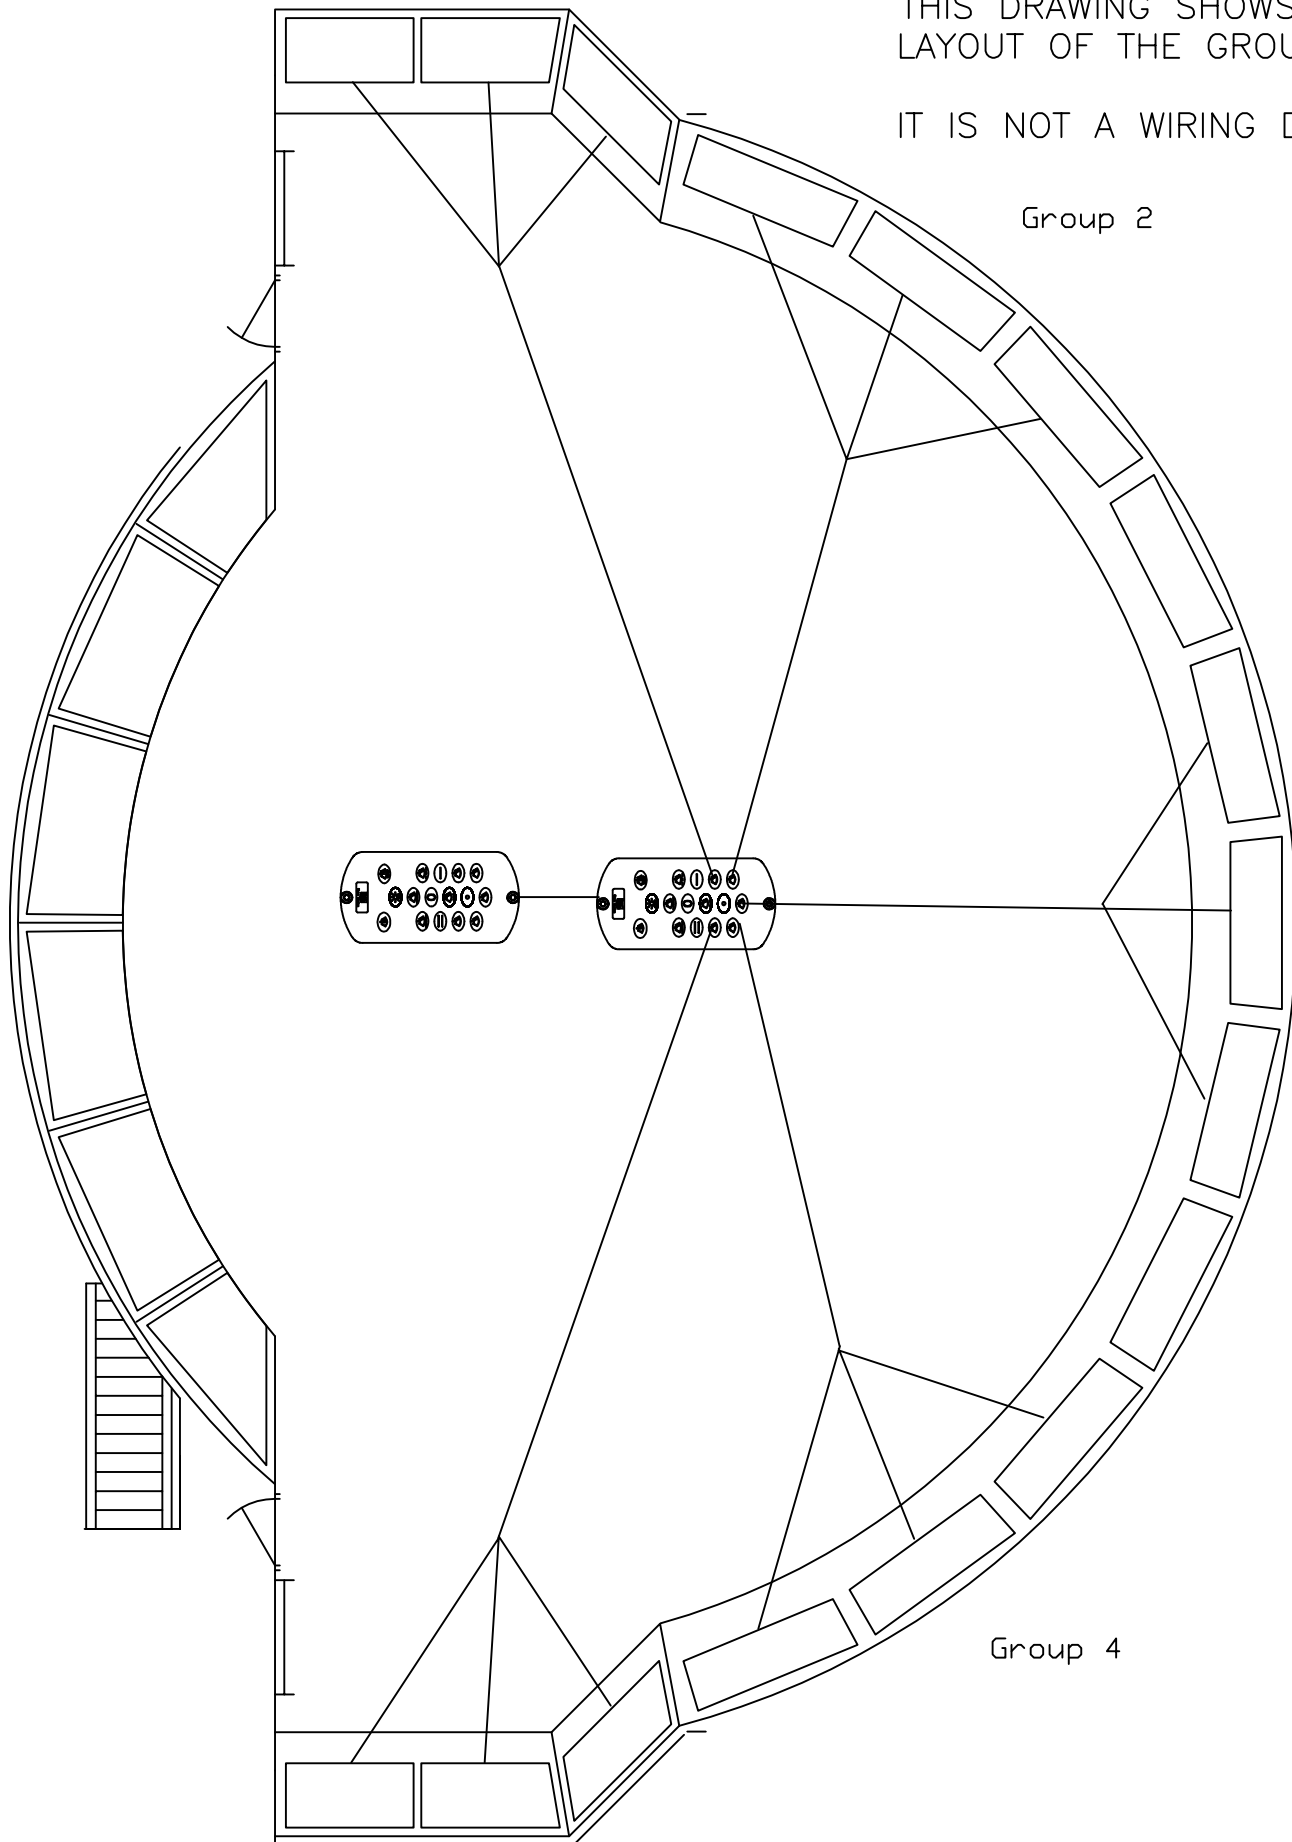

INSTALLATION OF SHIELDED TWISTED PAIR CABLE

Belden DeviceBus ® for ODVA DeviceNet



- ODVA Class 2 Thick
- 15 and 18 AWG Stranded Tinned Copper
- 100% individually foil shielded + overall 65% TC Braid
- Drain Wire
- PVC Insulation (Power)
- FPE Insulation (data)
- Lt Gray sunlight / oil resistant PVC jacket
- Temp Rating 75°C
- **Conductor (stranding) Diameter Nom. DCR** - (2) 15 AWG TC (19 x 28) 3.6 Ω / 1000 ft
- **Conductor (stranding) Diameter Nom. DCR** - (2) 18 AWG TC (19 x 30) 6.9 Ω / 1000 ft, Nom. Characteristic Impedance 120 Ω , Nom. Capacitance Conductor to Conductor 12 pF/ft
- **Shielding materials Nom. DCR** - 100% individual foil + overall 65% TC braid 1.8 Ω / 1000 ft,
- **Nominal OD** - 0.48", 12.19mm


This guide is based on the use of Belden 3082A cable (or similar, see specification above).

The cable is made up of a 15AWG power pair (red/black) and a 18AWG data pair (blue/white), each pair is individually foil screened with a drain wire, and an overall shielding braid.


In line with IEC 61000-5-2 the screen needs to be terminated at both ends of the cable.

The cable should be prepared as follows:-

1. Strip the outer insulation back 50mm
2. Carefully peel back the braid and twist to form a conductor.
3. Remove the foil insulation leaving 5mm showing.
4. Untwist each pair and strip back insulation on each conductor 5mm and twist strands together.
5. Twist the braid conductor and drain wire together and terminate with an eyelet. The cable should now look something like this:

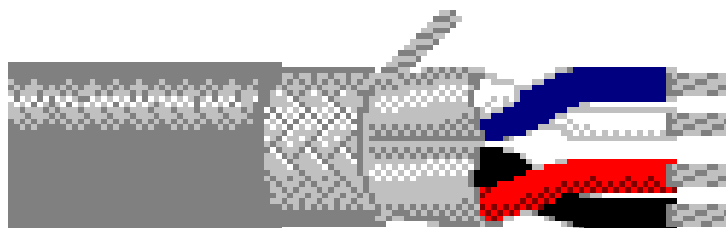


6. Secure the eyelet to the ships metal work using a suitable self-tapping screw, lock wash and plain washer, applying silicon grease to the surface prior to fitting. This is the preferred method.

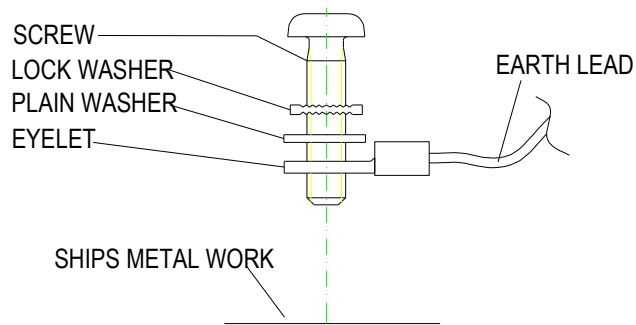

If the ships hull is non metallic or if there is no suitable earth bonding point is available then an alternative is to connect the braid to an appropriate point on the earth system, such as the control module earth located at the opposite end on the module.

The control module earths can only accommodate two connections, so if more than two earths are required to be connected to the module they must be joined together with a suitable connector and then a fly lead connected to the control module.

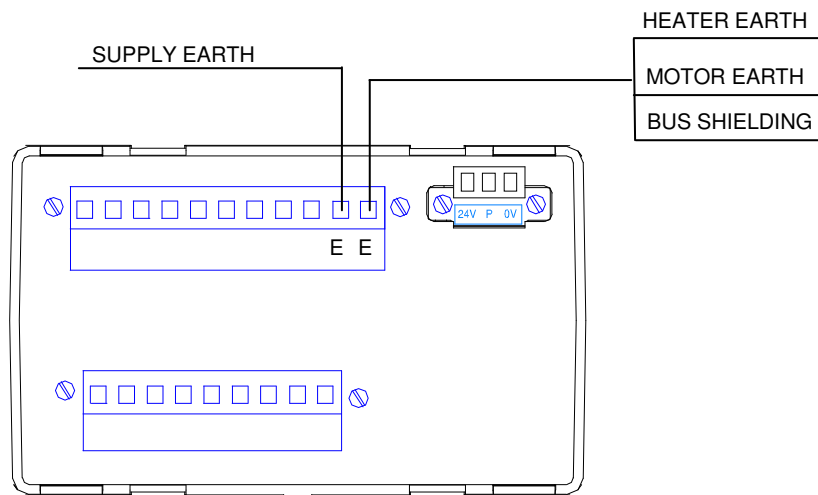

7. Connect the conductors to the keypad/module 4 way bus connector as follows:

Bus Connection	Colour
24V Power	Red
0V Power	Black
Bus -	White
Bus +	Blue


6500 KEYPAD

Technical specifications

Input supply	24VDC – From Bus
Maximum number of groups	7
Number of Auxiliary controls	4
Technology	Conductive Dome Switch
Communications	RS485
Illumination	2 colour LED – Fully dimmable

Keypad Dimensions

The overall keypad dimensions are shown in the diagram below.

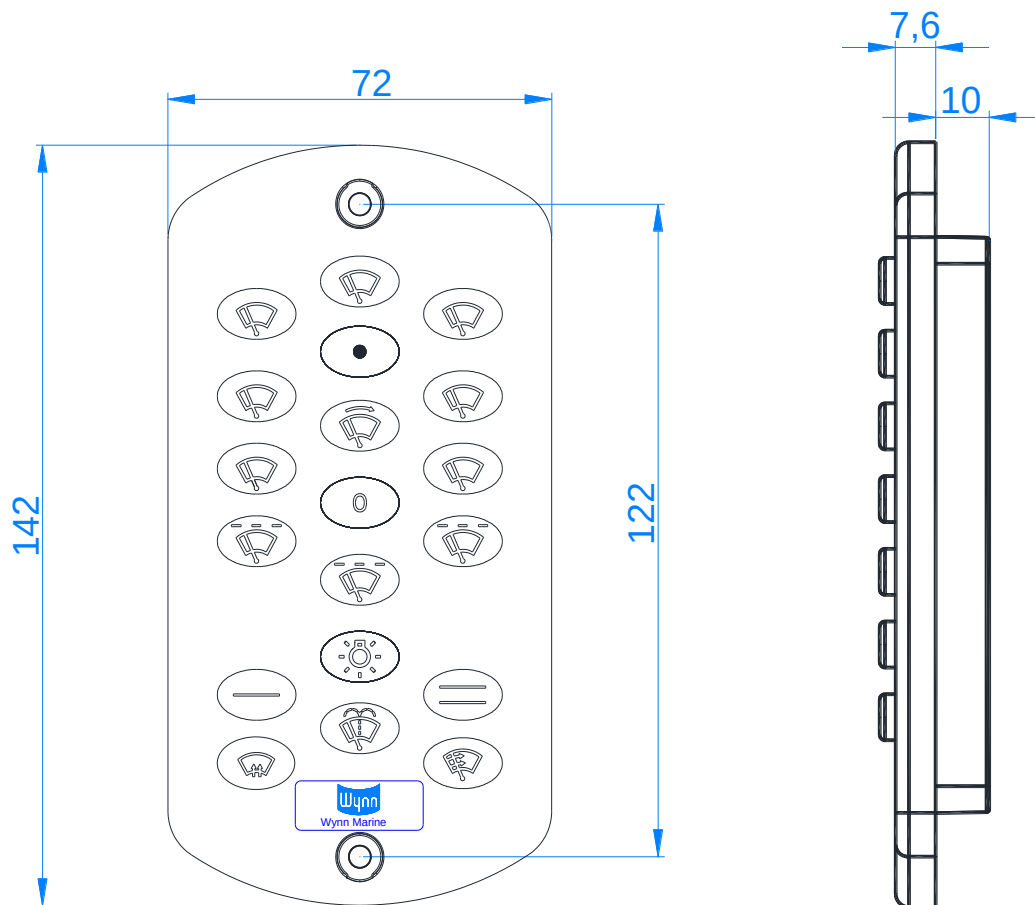

The 6500 keypad must be panel mounted, but can be in any plane it is important to ensure access can be gained to the rear connectors.

The 4-way connector mounted on the rear of the keypad enclosure accept a Phoenix Contact style plug with screw terminals.

The 4-way connector is for the bus connection.

There are no adjustable or user-serviceable parts within the keypad.



WARNING!

The Keypad module is a low voltage (24V DC) module – It has been designed to withstand bus wiring errors without damage but any voltage over 40V dc applied to the unit will destroy it and will void any warranty.

Installation procedures must be carried out with care, to ensure correct and safe operation. If you are in any doubt, consult qualified and competent engineering personnel, or consult Wynn Marine technical support (contact details on front and rear cover of this document).

A Termination resistor (6000-TR120) must be connected to the first keypad in the bus line only. *(Supplied with keypad)* On multiple keypad systems all other keypads are connected directly onto the bus without the termination resistor.

A Termination resistor (6000-TR120) *(Supplied with keypad)* must be connected to the last module on the bus.

Only connect the devices to the bus, power and outputs when you are sure the wiring is correct. Connect the plug firmly. Make all connections with the power off.

INSTALLATION INSTRUCTIONS


IMPORTANT

Installation procedures must be carried out with care, to ensure correct and safe operation. If you are in any doubt, consult qualified and competent engineering personnel, or consult Wynn Marine technical support (contact details on front and rear cover of this document).

Ref Figure - Panel Cut-Out Requirements

1. Provide a cut out in console for keypad according to dimensions.

Panel Cut-Out Requirements

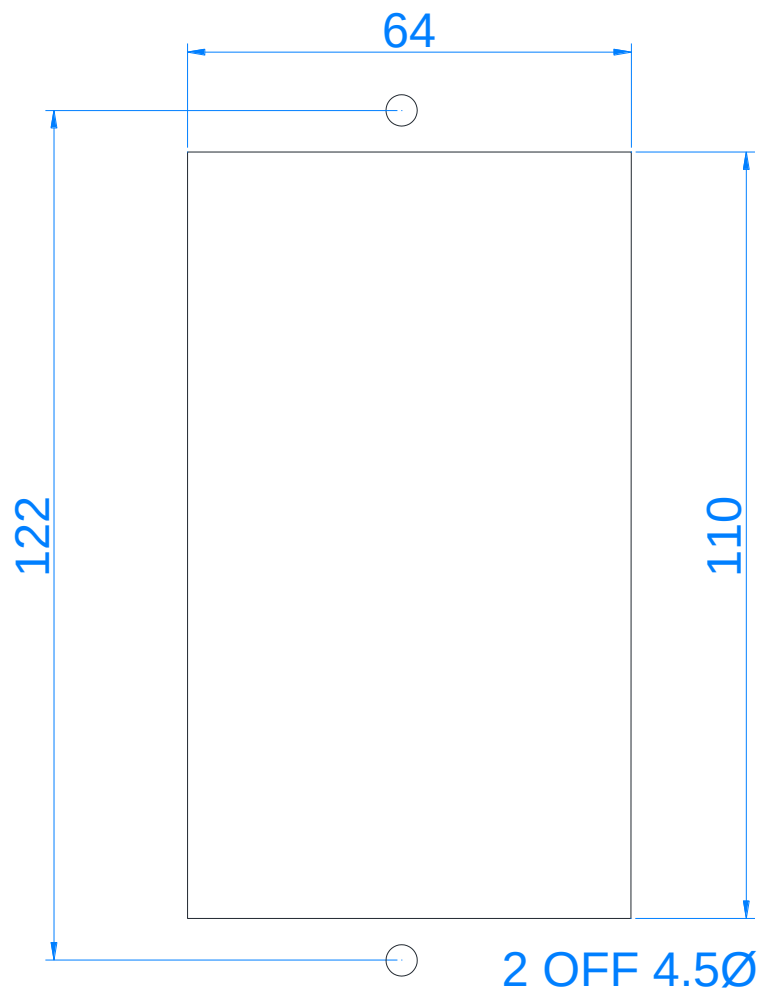


Ref Figure - Keypad Dimensions

2. The key pad is secured to the panel by M4 fixings (not supplied):

M4 x 12 pan-head screw (2 off, inserted through front of keypad)
M4 plain washer (2 off)
M4 shake-proof washer (2 off)
M4 nut (2 off, to rear of mounting panel)

Connection Details

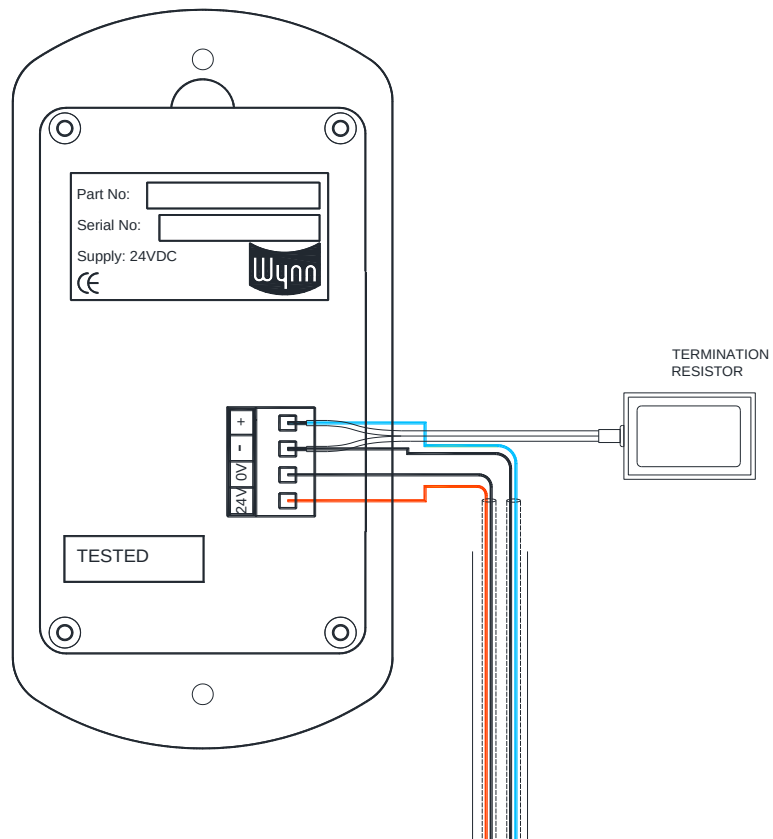

3. Connect termination resistor and bus cable to 4-way connector.
In accordance to wiring diagram.
4. Fit connector into keypad. (Ref notes above).


6500 KEYPAD OPERATION

The 6500 Keypad is a component part of the Wynn Marine 6000 Series of screen control devices. The keypad is the user-interface to the 6000 system, enabling all devices to be controlled from one or more keypads.

User Operational Description


This section describes end-user operation of the System 6000 Keypad in normal usage.

The diagram below shows a typical 6500 Keypad layout (three-way, one-speed) and the names given to the keys.

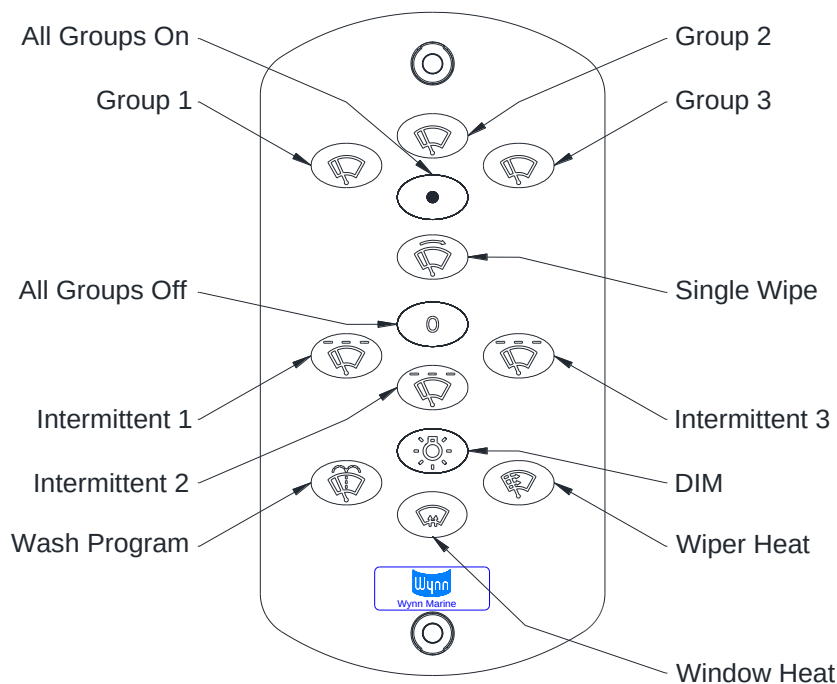


Keypad Icons 2-5 Way One Speed Keypads

The diagram below shows a typical 6500 Keypad layout (five-way, two-speed) and the names given to the keys.

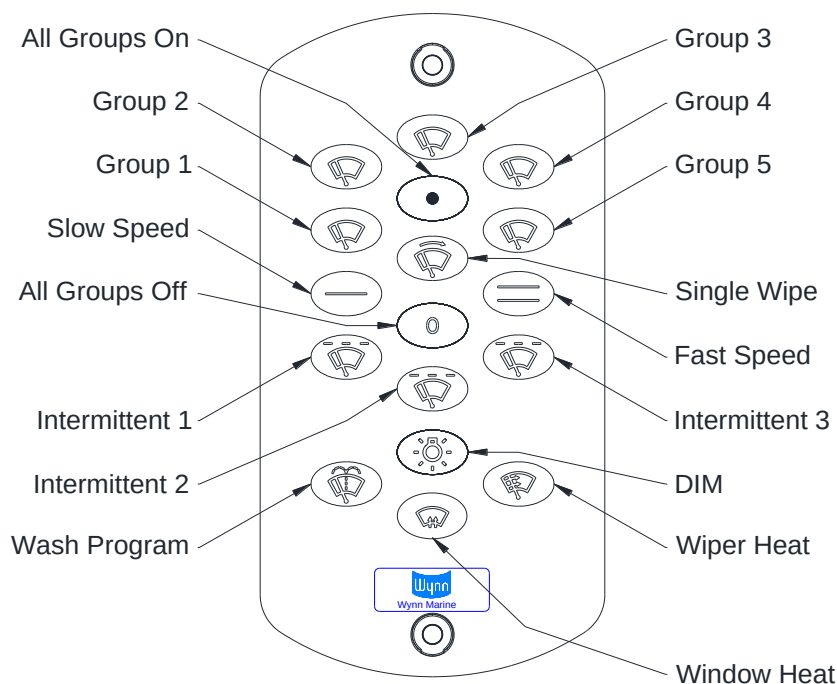


Keypad Icons 2-5 Way Two Speed Keypads

The diagram below shows a typical 6500 Keypad layout (six-way, one-speed) and the names given to the keys.

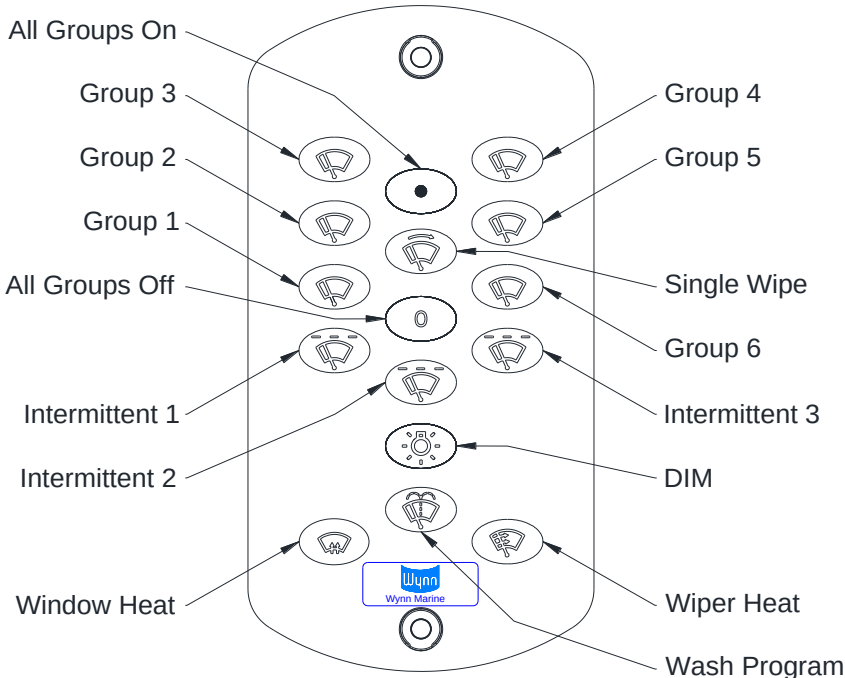

Keypad Icons 6-7 Way One Speed Keypads

The diagram below shows a typical 6500 Keypad layout (seven-way, two-speed) and the names given to the keys.

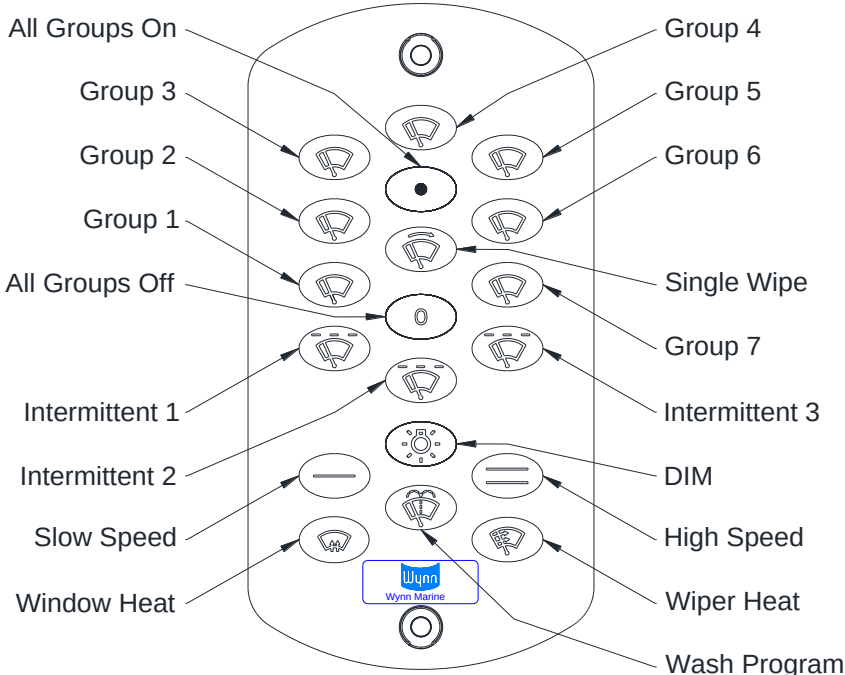

Keypad Icons 6-7 Way Two Speed Keypads

On power being supplied to the keypad, all icons will turn **GREEN** to show availability. When in operation, icons will turn **ORANGE** to show those in use.

If the **DIM** key is illuminated red, it indicates the keypad is arbitrating for the control bus. Wait for the **DIM** key to extinguish before attempting to use the keypad.

Description and Operation of Keypad

Icon	Description	Operation
	Individual Wiper Group	Press - turns group on in normal speed. Group icon turns ORANGE Press - while running, turns group off. ORANGE light turns GREEN
	All Wiper Groups - Turn Off	Press - while running turns all groups off. ORANGE lights turns GREEN
	All Wiper Groups - Turn On	Press - turns all groups on in normal speed. Group icons turns ORANGE
	Single wipe	Press - turns all groups on for single wipe in normal speed (does not affect any group already wiping)
	Low Speed	Press - followed by group icon or all group icon turns group(s) on in low speed or to low speed if in any other setting Icon will turn ORANGE whilst icons pressed Group icon(s) turn ORANGE Press - while running, turns group icon(s) off. ORANGE light turns GREEN
	High Speed	Press - followed by group icon or all group icon turns group(s) on in high speed or to high speed if in any other setting Icon will turn ORANGE whilst icons pressed Group icon(s) turn ORANGE Press - while running, turns group icon(s) off. ORANGE light turns GREEN
	Heated Wiper	Press - turns all heated wipers on. <i>Heated Wipers = heated unit and/or heated arm and/or heated wash jet)</i> Heated wiper icon turns ORANGE Press - while on, turns all heated wipers off. ORANGE light turns GREEN
	Heated Screen	Press - turns on all heated screens. Heated wiper icon turns ORANGE Press - while on, turns all heated screens off. ORANGE light turns GREEN
	Intermittent 1	Press - followed by group icon or all group icon turns group(s) on in/to intermittent wipe- short delay (Default - 8 second interval between wipes) Icon turns ORANGE and group icon(s) turn ORANGE Press - while running, turns intermittent wipe off. ORANGE light turns GREEN
	Intermittent 2	Press - followed by group icon or all group icon turns group(s) on in/to intermittent wipe- long delay (Default - 12 second interval between wipes) Icon turns ORANGE and group icon(s) turn ORANGE Press - while running, turns intermittent wipe off. ORANGE light turns GREEN
	Intermittent 3	Press - followed by group icon or all group icon turns group(s) on in/to intermittent wipe- long delay (Default - 16 second interval between wipes) Icon turns ORANGE and group icon(s) turn ORANGE Press - while running, turns intermittent wipe off. ORANGE light turns GREEN
	Dim	Press - repeatedly to cycle through from maximum brightness to off, then back to maximum brightness. Stop pressing icon at required brightness
	Wash	Press - followed by group icon or all group icon starts wash cycle Wash icon turns ORANGE and group icon(s) turn ORANGE Press - while in cycle terminates wash cycle. ORANGE light turns GREEN <i>On installations with air-purge, purge will be activated as part of wash cycle.</i>

Default timings for wash cycle


Water is sprayed onto screen for 10 seconds. Wiper starts five seconds after **group icon** or **all group icon** is pressed and wipes for a period of fifteen seconds.

If Air-purge fitted


After completion of water spray period, air purge is activated for five seconds. Wiper continues for a period after end of air purge.

KEYPAD CONFIGURATIONS

The Keypad may be supplied in a number of formats; from one-way/group to seven-way/group, and single-speed or two-speed. The following diagrams show the layouts for all formats. The Group buttons are labelled for illustrative purposes only.

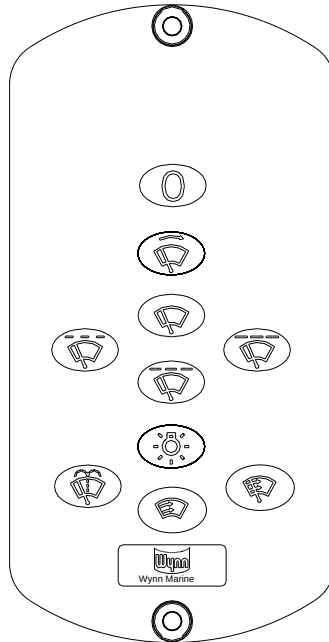


1 way, single speed

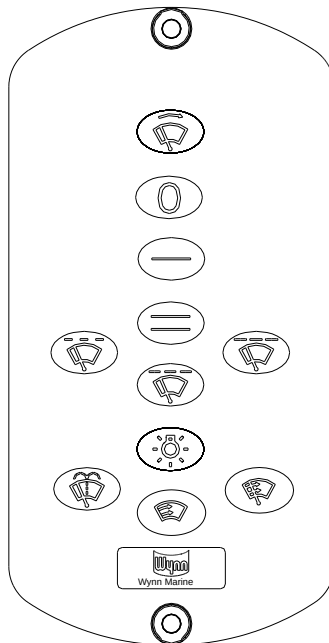


1 way, two speed

Single Group Format


Note: Greyed keys may or may not be present, depending on how the Keypad is specified.

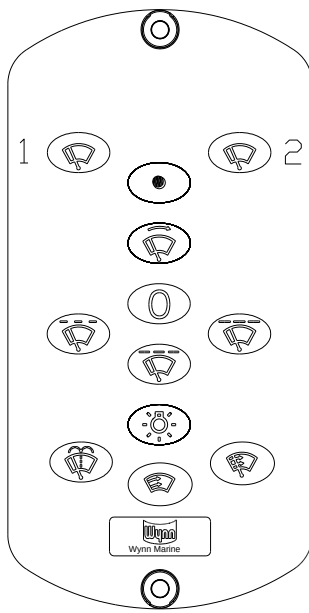


2 way, single speed

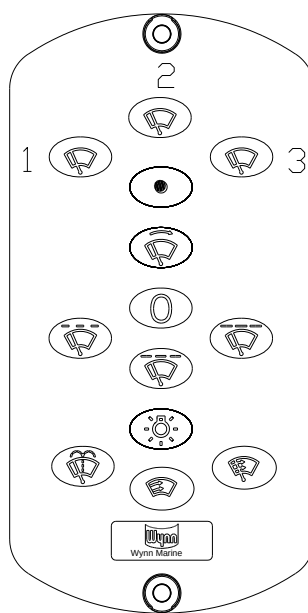


3 way, single speed

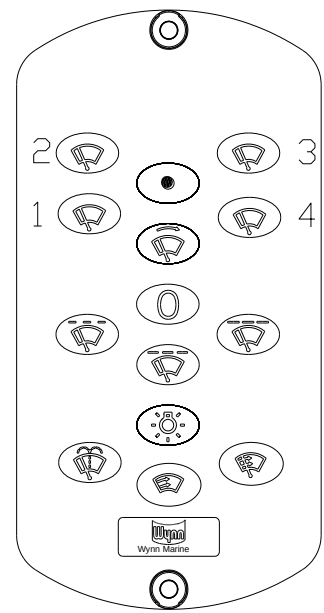


4 way, single speed

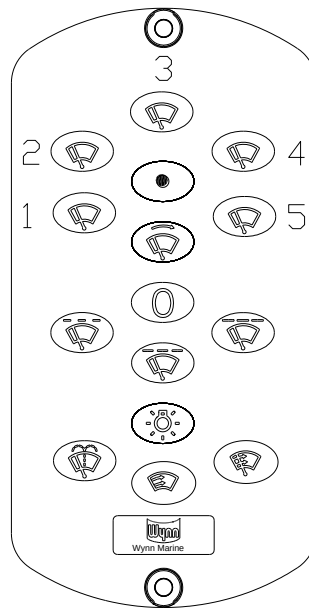

5 way, single speed

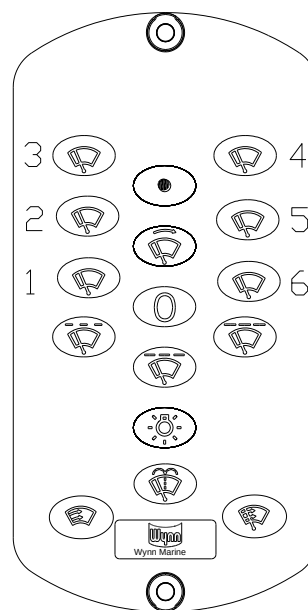


6 way, single speed

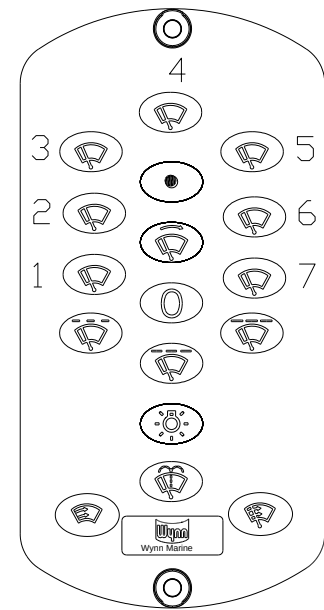


7 way, single speed

Multi-Group, single-speed format


Note: Greyed keys may or may not be present, depending on how the Keypad is specified.

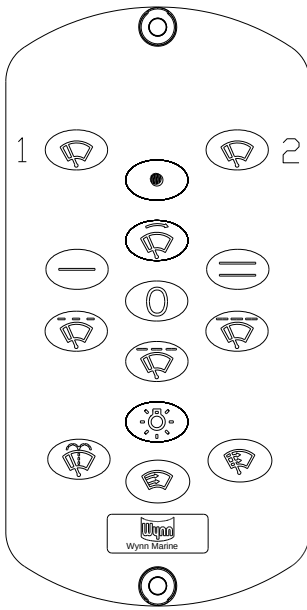


2 way, two speed

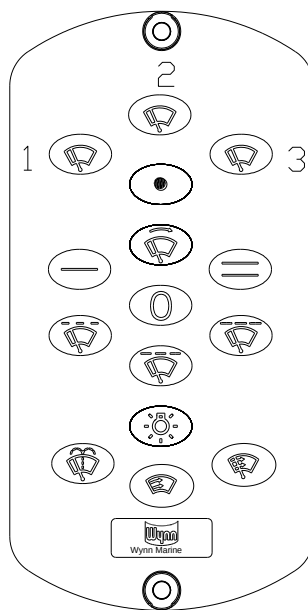


3 way, two speed

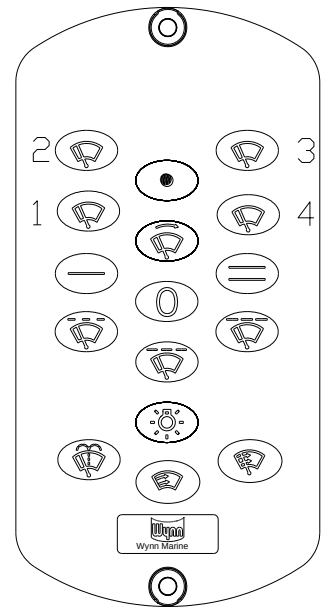


4 way, two speed

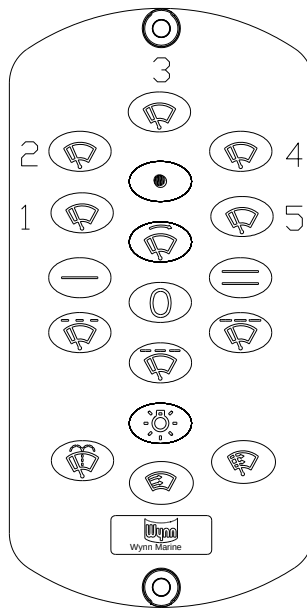

5 way, two speed

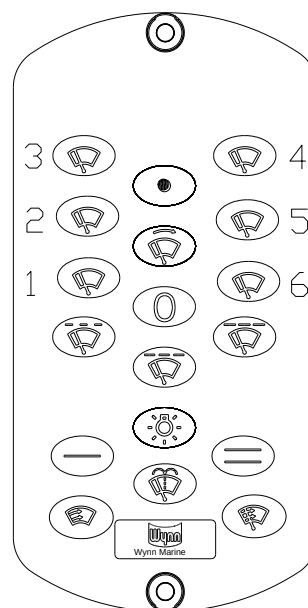

6 way, two speed

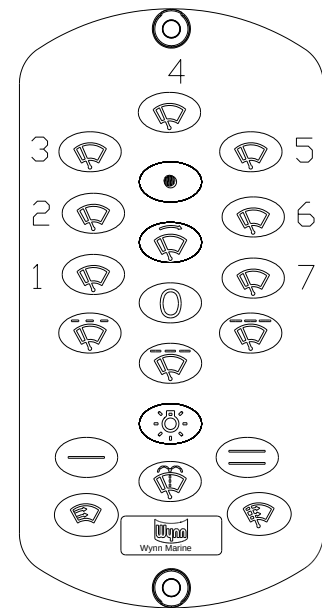

7 way, two speed

Multi-Group, two-speed format

Note: Greyed keys may or may not be present, depending on how the Keypad is specified.

6500 KEYPAD USER-PROGRAMMING

Introduction

The 6000 system features a user-programmable set-up mode, enabling the end-user to configure the system to requirements. In Set-up mode, the user can:

- Programme the wiper intermittent periods
- Programme the wash cycle timing (wash period and optional air purge period).
- Select wash with-or-without wipe and programme wipe delay and wipe hold times.
- Set all groups or individual-group wash cycle timings (multi-way systems only).
- Restore default wiper intermittent rates and wash cycle timings.

The following sections describe how to enter and exit set-up mode, and how to programme the system to the user's requirements.

Entering and Exiting User Set-Up Mode

NOTE

On power up, the 6500 keypad will operate normally.

	USER KEY-SEQUENCE	LED INDICATION	RESULTING ACTION
First Step	DIM  & WIPER OFF 	DIM LIGHT FLASHES	Enter user set up mode.
Programmable Steps as Required	<i>With reference to the following charts for setting Intermittent Periods; All Groups or Individual-Group Wash Cycle Timings; Wash/Air Purge with Extended Wipe; and restoration of Factory Default:</i>		
Last Step	DIM  & WIPER OFF 	DIM LIGHT GREEN	User set up mode exited.

IMPORTANT

The system will not exit set-up mode if programming of intermittent periods or wash cycle is not complete. User must complete programming before system will allow itself to return to the normal operating mode.

Programming the Intermittent Periods

The default intermittent rates are 8, 12, and 16 seconds for intermittent keys INTERMITTENT 1 , INTERMITTENT 2 , and INTERMITTENT 3  respectively.

To Programme a new Wiper Intermittent Period

	USER KEY-SEQUENCE	LED INDICATION	RESULTING ACTION
Step 1	DIM  & WIPER OFF 	DIM LIGHT FLASHES	Enter user set up mode.
Step 2	INTERMITTENT  or  or 	CORRESPONDING LIGHT FLASHES	All groups will perform a single wipe.
	Wait until next wipe is required - (time from first wipe to second wipe is stored)		
Step 3	INTERMITTENT  or  or 	CORRESPONDING LIGHT EXTINGUISHES	All groups will perform a single wipe at new time.
Step 4	DIM  & WIPER OFF 	DIM LIGHT GREEN	User set up mode exited.

NOTE

Settings are stored in the non-volatile memory of the system. They are retained even if the power is removed from the system. Previous intermittent rates are overwritten.


Maximum period for any intermittent parameter is fifty seconds. If user does not press INTERMITTENT key for a second time within fifty seconds, the programming is aborted and no change is made to the settings.

Wash Cycle Timings

A wash cycle comprises of a screen wash followed by an air-purge (if present in the system). Optionally the wiper will start after a delay and continue wiping during the remaining wash and air-purge.

The default wash cycle timings are as follows:

- Inclusive Wash [On]
- Wash time [10 seconds]
- Air purge time [5 seconds] (*Starts after wash finishes*)
- Wipe with Wash [On]
- Wipe delay [5 seconds] (*Starts 5 seconds after wash starts*)
- Wipe hold time [15 seconds] (*Finishes after wash and purge finish*)

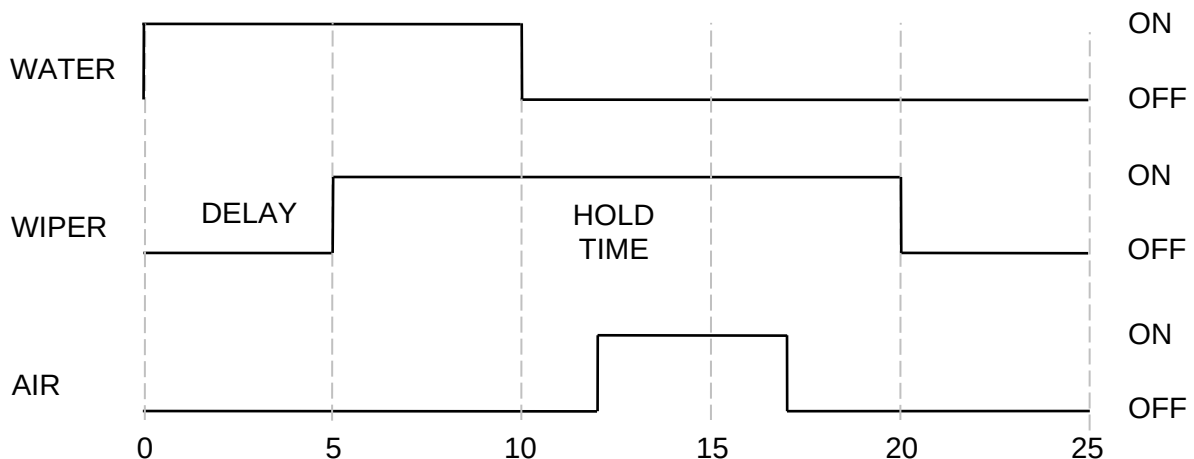

Programming the Wash Cycle Timings

A group can be programmed so that its wash cycle timings are determined by *all-inclusive* wash cycle timings, which operate on all groups, or by *individual* wash cycle timings which operate on a single group only.

By default, the wash timings of groups are determined by *all-inclusive* wash cycle timings.

NOTE

Settings are stored in the non-volatile memory of the system. They are retained even if the power is removed from the system. Previous wash cycle periods are overwritten.

Maximum period for any wash cycle parameter is fifty seconds. If user does not press an APPROPRIATE KEY within the fifty seconds period, the programming is aborted and no change is made to the settings.

Programming a Wash/Air Purge with Extended Wipe Cycle

The following table describes the key steps required to program the keypad for a wash/air purge cycle with extended auto-wipe.

To Programme a Wash/Air Purge with Extended Wipe Cycle

	USER KEY-SEQUENCE	LED INDICATION	RESULTING ACTION
Step 1	DIM  & WIPER OFF 	DIM LIGHT FLASH	Enter user set up mode.
Step 2	WASH 	WASH LED ORANGE	
Step 3	GROUP  or	GROUP LED ON	Wash ON
Step 3	ALL GROUPS  (Ref Note 1)	ALL GROUP LEDs ON	Wash ON
	<i>Wait until enough water is on the screen</i>		
Step 4	SINGLE WIPE  (Ref Note 2)	SINGLE WIPE LED ON	Wiper ON
	<i>Wait until wiper has cleaned screen</i>		
Step 5	WASH 	Group LEDs FLASH	Wash OFF, [Purge ON]
	<i>Wait until enough air has cleared water from the wash jets</i>		
Step 6	WASH 	Group LED OFF	[Purge OFF]
	<i>Wait until wiper has cleaned remaining water from screen</i>		
Step 7	WIPER OFF 	WASH & SINGLE WIPE LEDs OFF	Wipe OFF. Wash-on, Purge-on, Wipe delay, and Wipe-hold times are SAVED
Step 8	DIM  & WIPER OFF 	DIM LIGHT GREEN	User set up mode exited.

NOTE 1

ALL GROUPS  key is pressed only on multi-way keypads.

NOTE 2

SINGLE WIPE  key starts the wipers which will remain ON until the WIPER OFF  key is pressed (step 7). Its behaviour differs from that in normal operating mode.

NOTE 3

If the group has an air purge unit present, it will be activated by this cycle.

Restoring Default Intermittent Wipe and Wash Cycle Timings

The user may restore the default settings for intermittent wipe periods and wash cycle timings.

To restore default settings

	USER KEY-SEQUENCE	LED INDICATION	RESULTING ACTION
Step 1	DIM  & WIPER OFF 	DIM LIGHT FLASH	Enter user set up mode.
Step 2	SINGLE WIPE  & WIPER OFF 	DIM LIGHT FLASH	Default settings restored.
Step 3	DIM  & WIPER OFF 	DIM LIGHT GREEN	User set up mode exited.

IMPORTANT

If wash cycle and/or intermittent periods have been previously set to customised values, this command will override the customised settings which will be permanently lost.

6000 TROUBLESHOOTING GUIDE

The following guide should help users diagnose any problems with a 6000 Series System. The guide is split into 2 sections; Keypad issues and Module issues.

Keypad Issues

Systems With A Single Keypad

Problem	Solution
Devices do not operate when keys are pressed, and/or no key illumination	There is no power to the Keypad. Check that the 24V supply is present at the connector on the rear.
Keypad is illuminated, but devices still do not function	The WiperNet connections between Keypad and device module(s) are not continuous. Check continuity.
No Keypad illumination	The dimming level is set to minimum. Hold down the DIM key until the key illumination is at the level you require
Still no Keypad illumination	When ambient light levels are high, it may be difficult to see any background lighting at all. Shade the Keypad with your hand and cycle the lighting by holding down the DIM key.
DIM key lit red, but nothing else and no response	Keypad has failed its power-up sequence. Re-cycle the power and try again. Wait at least 30 seconds for the DIM key to extinguish. If the problem persists, contact Customer Services.
DIM key is flashing	The Keypad is in User Set-Up Mode. Press the WIPER OFF and DIM keys simultaneously to return to Normal-Operating Mode.
Wash cycle is not operating as I want it to	You need to re-programme the wash cycle in User Set-Up Mode.
The intermittent periods are not as I would like	You need to re-programme the intermittent periods in User Set-Up Mode.
Remote input does not work at all	The Keypad is programmed not to respond to the remote input. Contact Customer Services.
Remote input activates some wipers but not others	The Keypad is programmed not to respond to the remote input. Contact Customer Services.
Remote input works strangely	The type of remote switch does not correspond to that expected by the Keypad. Contact Customer Services.

Systems With Multiple Keypads

Try the list of problems above first, before attempting to diagnose a problem with a multi-Keypad system.

Problem

Solution

All Keypads have DIM key illuminated, and will not respond

Wait at least 30 seconds for the DIM key(s) to extinguish.

If the DIM key still fails to extinguish, disconnect all Keypads from the system and replace each one in the system one by one, and check that it functions. You must power down the system (the 24V at least), before returning a Keypad to the system. If the Keypad is inserted with the power on, it will not be registered with the Master Keypad and will continue to be ignored.

If the problem persists, contact Customer Services.

Some DIM keys lit red, but nothing else and no response

The Keypads with DIM keys illuminated are not connected properly or were not present when the register was taken at power up. Power down the 24V supply, wait a few seconds for the supply rail to drop, then re-apply the power. All Keypads should be registered. If the problem persists, there is a connection problem.

Check WiperNet continuity.

Keypad takes a long time to take-control

There is user activity on another Keypad within the system. If another Keypad is in use, it will take approx five seconds of inactivity before a request to take-control is 'serviced'.

Keypad will not take-control

The Keypad is not connected properly or was not present when the register was taken. Power down the 24V supply, wait a few seconds for the supply rail to drop, then re-apply the power. The Keypad should be registered. If the problem persists, there is a connection problem.

Check WiperNet continuity.

Module Issues



WARNING: Ensure that all power is disconnected whilst working on the controller.

The controller contains no user serviceable items.

Check that other wipers within the group are working, showing that the problem is not a system problem.

Problem: Control module does not operate wiper.

Possible Cause	Solution
No Power.	Verify that fuses or circuit breakers (customer supplied) have not blown. Check that the bus supply (24VDC) and motor supply voltages (115/220VAC) are present at the module.
Plugs Loose	Verify 4 way bus, 11 way power/motor and 9 way auxiliary output connectors are fully pushed in.
Verify Group settings are correct (initial installation only)	Group switch should be set to 1, 2, 3, 4, 5, 6 or 7. Any other position will not work.
Bus connections incorrect. (initial installation only)	Check for the correct connections of the cables between wiper modules (24V to 24V, 0V to 0V, bus+ to bus+, bus- to bus-,) Check wiring between modules to ensure all modules, power supply and control panel are correctly connected.
Connections to motor incorrect. (initial installation only)	Check for wiring fault, broken wire or loose terminal. If possible confirm (with voltmeter) power is present at motor input and output terminals of control module. Check wiring according to the appropriate electrical installation drawing.
Motor Faulty	Replace Motor
Module Faulty	Check with known working module first; replace module with correct part number.

Problem: Motor only runs at one speed (3 phase module only).

Possible Cause	Solution
Plugs Loose	Verify 11 way power/motor is fully pushed in.
Connections to motor incorrect. (initial installation only)	Check for wiring fault, broken wire or loose terminal. If possible confirm (with voltmeter) power is present at motor input and output terminals of control module. Check wiring according to the appropriate electrical installation drawing.
Motor Faulty	Replace Motor
Module Faulty	Check with known working module first; replace module with correct part number.

Problem: Wiper does not park correctly

Possible Cause	Solution
Plugs Loose	Verify 3 way park connector is fully pushed in.
Connections to park switch. (initial installation only)	Check for wiring fault, broken wire or loose terminal.
Park switch faulty	If possible confirm (with multimeter) open circuit on park switch wires when wiper not parked and short circuit when wiper arm in park position. Check wiring according to the appropriate electrical installation drawing. Replace park switch

Problem: Heater does not warm up.

Possible Cause	Solution
Wrong module type	Check module part number.
Plugs Loose	Verify 11 way & 9 way are fully pushed in.
Connections to heater incorrect. (initial installation only)	Check for wiring fault, broken wire or loose terminal. If possible confirm (with voltmeter) power is present at heater output terminals of control module. Check wiring according to the appropriate electrical installation drawing.
Heater Faulty	Replace Heater
Module Faulty	Check with known working module first; replace module with correct part number.

Problem: Wash Solenoid does not operate.

Possible Cause	Solution
Wrong module type	Check module part number.
Plugs Loose	Verify 11 way & 9 way are fully pushed in.
Connections to solenoid incorrect. (initial installation only)	Check for wiring fault, broken wire or loose terminal. If possible confirm (with voltmeter) power is present at solenoid output terminals of control module. Check wiring according to the appropriate electrical installation drawing.
Solenoid Faulty	Replace Solenoid
Module Faulty	Check with known working module first; replace module with correct part number.

Problems: Purge Solenoid does not operate.


Possible Cause	Solution
Wrong module type	Check module part number.
Plugs Loose	Verify 11 way & 9 way are fully pushed in.
Connections to solenoid incorrect. (initial installation only)	Check for wiring fault, broken wire or loose terminal. If possible confirm (with voltmeter) power is present at solenoid output terminals of control module. Check wiring according to the appropriate electrical installation drawing.
Solenoid Faulty	Replace Solenoid
Module Faulty	Check with known working module first; replace module with correct part number.

6100 MODULE

Technical specifications

Input supply motor PCB	115 or 230 Vac 1Ph
Input supply additional PCB	24Vdc, 115Vac or 230Vac 1Ph
Wash output	min 40mA, max 6A
Purge output	min 40mA, max 6A
Case heat output	min 40mA, max 6A
Window heat output	min 40mA, max 6A

Module Dimensions

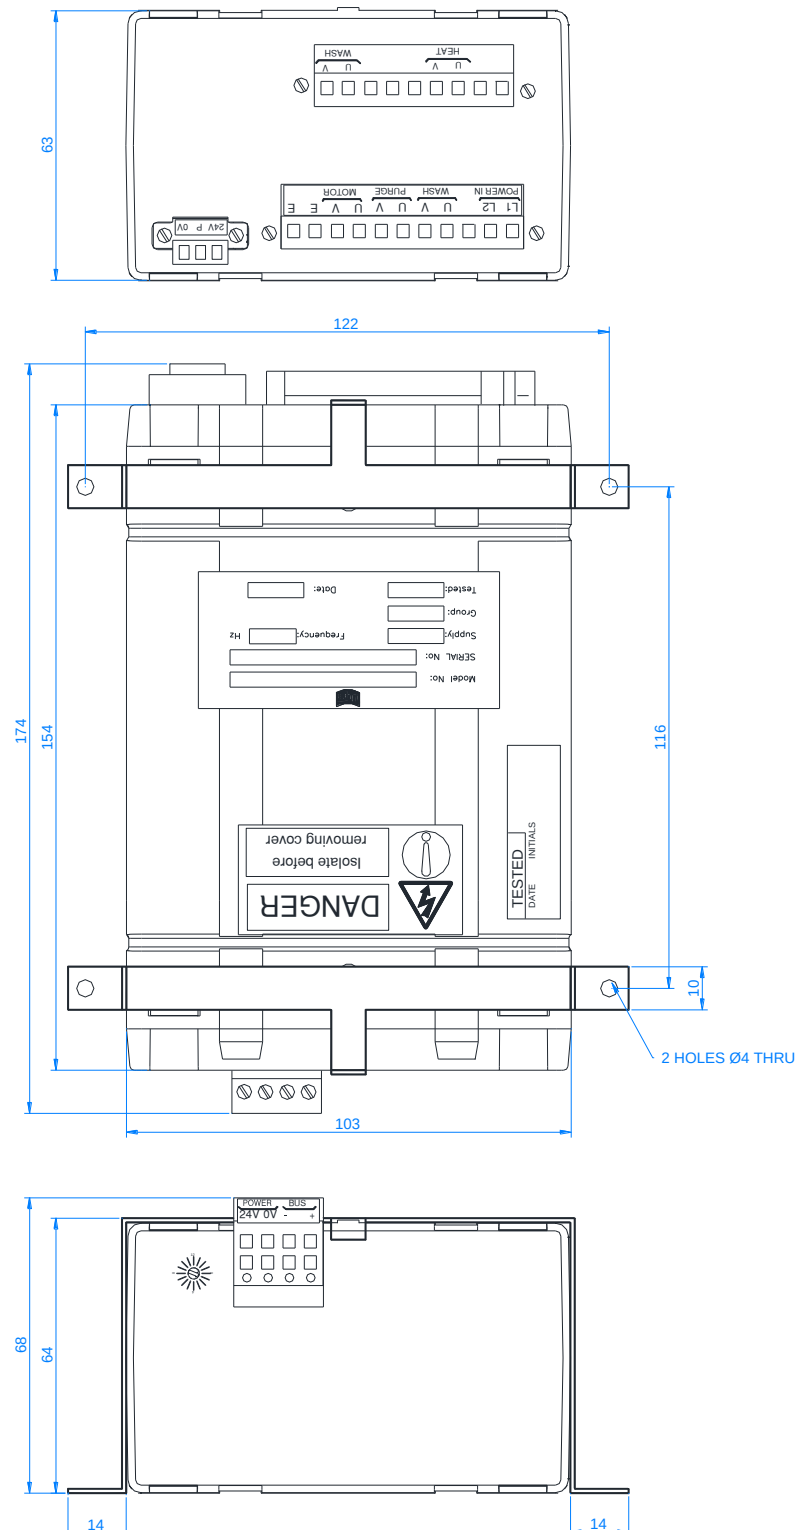

INSTALLATION INSTRUCTIONS

IMPORTANT

Wiper modules should be mounted in accordance with recommendations in IEC60945 sect 4.7.1. Care should be taken to install the units in line with the unit labelling and bridge layout drawings.


The module is supplied with the connector plugs fitted to the module sockets. The plugs can be removed for ease of installation.

For 6100 modules, Motor power and two additional outputs may be switched via the 11-way connector. The 9-way connector will be fitted for additional options. This can be any combination of case heat, wash, purge and window heat.

Recommended is to use one output for the case heater, this can save cost in cable.

For split power sources (i.e. 230VAC Motor with 24V AC or DC Heaters), power to the Heater is derived from the 9-way connector).


Rear Panel Connections

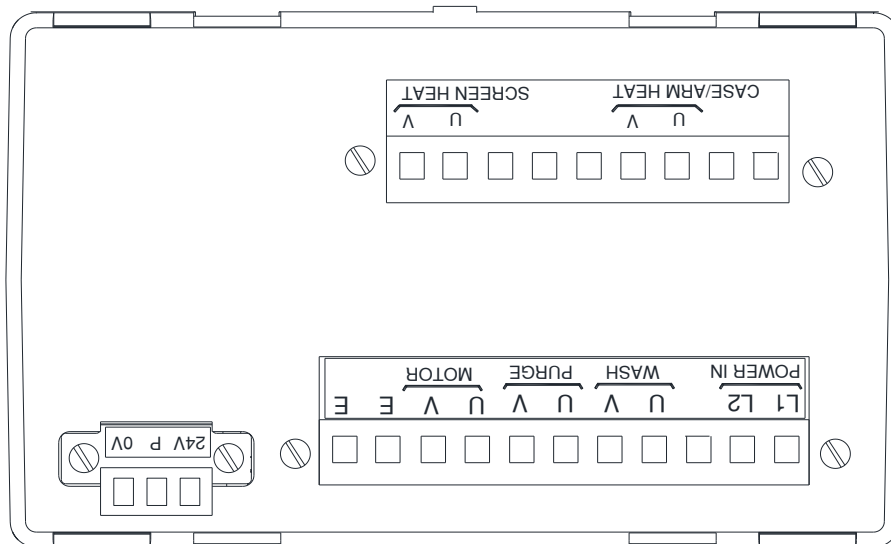

Choose a location for motor control module so that it is within range of motor cable, wiper heat/arm heater cable and park switch cable.

1. Mount the modules with the fixing clamps provided.
2. Connect the motor cable and power cable to the 11-way connector in accordance with the wiring diagram.
3. Connect the Park Switch cable to the 3-way connector in accordance with the wiring diagram.
4. Connect any required Heat/Wash/Purge cabling to the 11 way or 9-way connector if present.


Front Panel Connections

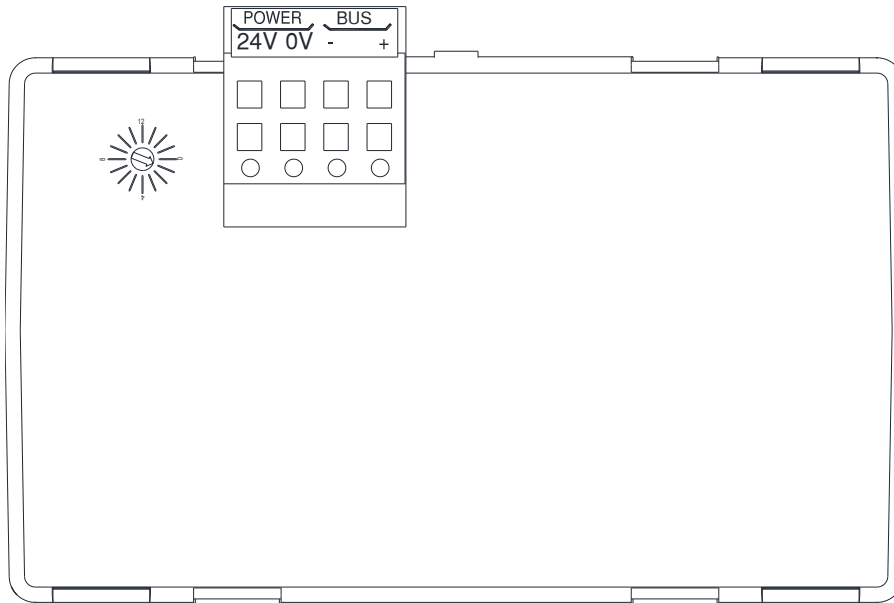

RS 485 bus must be wired as one continuous bus without splitting of wiring.
The 4-way connector is double height to allow for continuous linking between the modules.

5. Connect bus cable to 4-way connector in accordance with the wiring diagram.
6. The terminating resistor module must be connected to the last module in the chain in accordance with the wiring diagram.
7. Ensure/set the Group Switch to the correct Group (see group switch drawing).
8. To change group, using a small screwdriver rotate the group switch one position to the right to go up one group, rotate the group switch one position to the left to go down one group.

Group Switch

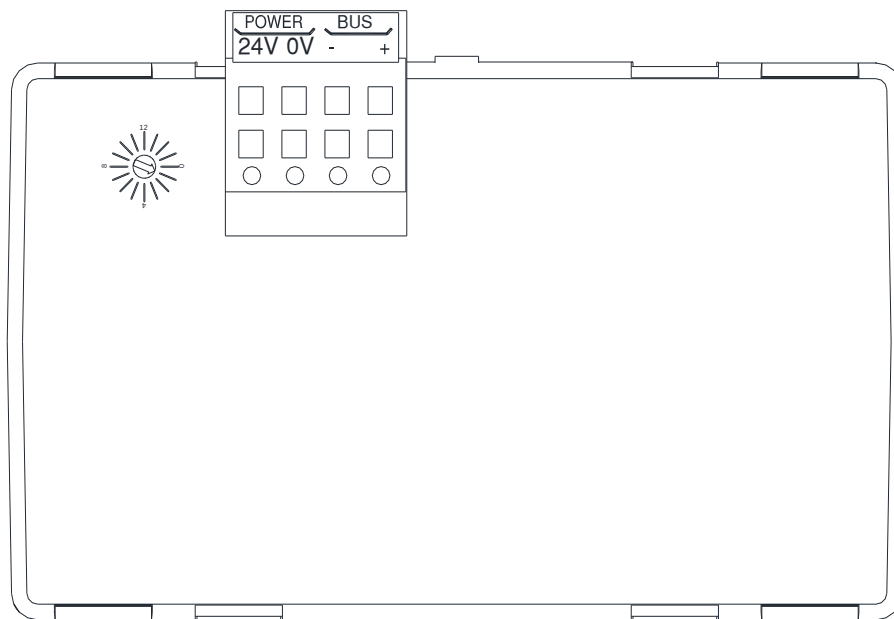


GROUP 1 GROUP 2 GROUP 3 GROUP 4 GROUP 5 GROUP 6 GROUP 7

6300 MODULE

Technical specifications

Input supply motor PCB	115 or 230 Vac 3Ph
Input supply additional PCB	24Vdc, 115Vac or 230Vac 1Ph
Wash output	min 40mA, max 6A
Purge output	min 40mA, max 6A
Case heat output	min 40mA, max 6A
Window heat output	min 40mA, max 6A

Module Dimensions

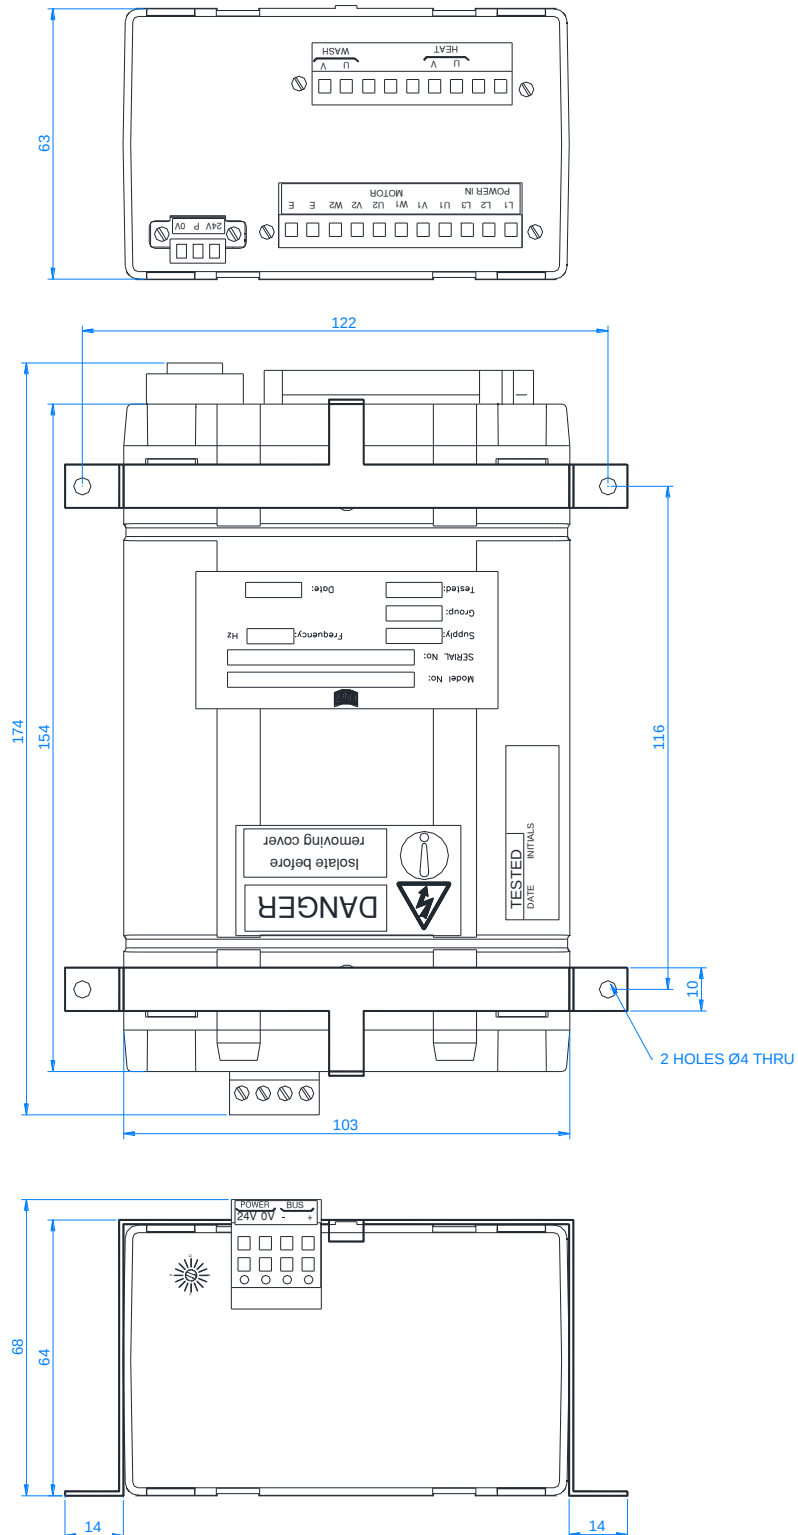

INSTALLATION INSTRUCTIONS

IMPORTANT

Wiper modules should be mounted in accordance with recommendations in IEC60945 sect 4.7.1. Care should be taken to install the units in line with the unit labelling and bridge layout drawings.


The module is supplied with the connector plugs fitted to the module sockets. The plugs can be removed for ease of installation.

For 6300 modules, motor power only is provided on the 11-way connector. Heat and Wash may be controlled via the additional 9-way connector if fitted.

Recommended is to use one output for the case heater, this can save cost in cable.

For split power sources (i.e. 230VAC Motor with 24V AC or DC Heaters), power to the Heater is derived from the 9-way connector).


Rear Panel Connections

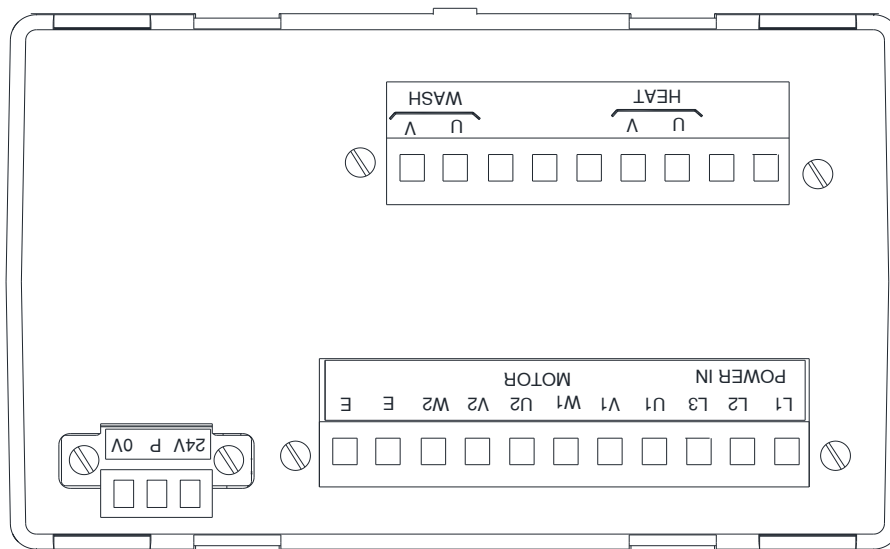

Choose a location for motor control module so that it is within range of motor cable, wiper heat/arm heater cable and park switch cable.

1. Mount the modules with the fixing clamps provided.
2. Connect the motor cable and power cable to the 11-way connector in accordance with the wiring diagram. Power Phasing must not be swapped – if L1, L2 or L3 are incorrectly connected, internal software fusing will not function correctly.
3. Connect the Park Switch cable to the 3-way connector in accordance with the wiring diagram.
4. Connect any required Heat/Wash/Purge cabling to the 9-way connector if present.


Front Panel Connections

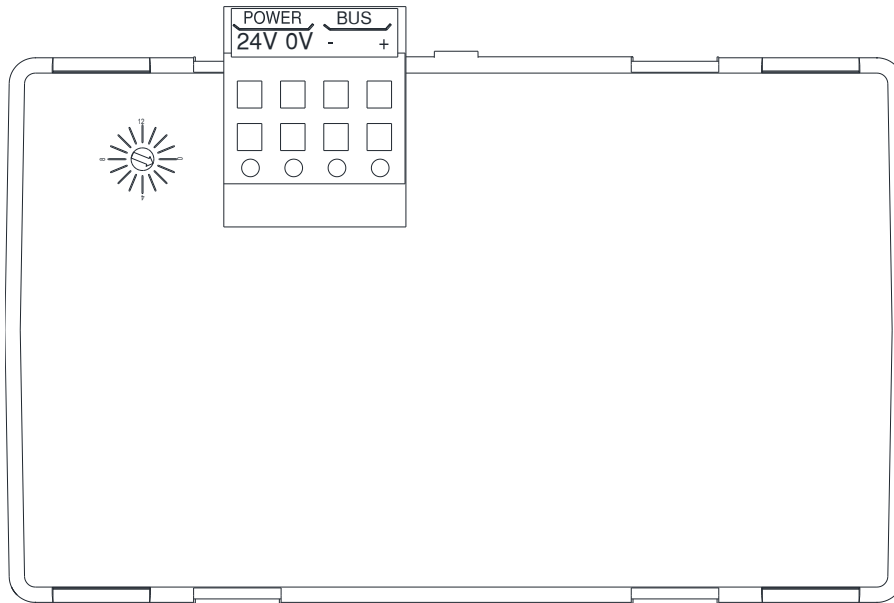

RS 485 bus must be wired as one continuous bus without splitting of wiring.
The 4-way connector is double height to allow for continuous linking between the modules.

5. Connect bus cable to 4-way connector in accordance with the wiring diagram.
6. The terminating resistor module must be connected to the last module in the chain in accordance with the wiring diagram.
7. Ensure/set the Group Switch to the correct Group (see group switch drawing).
8. To change group, using a small screwdriver rotate the group switch one position to the right to go up one group, rotate the group switch one position to the left to go down one group.


Group Switch

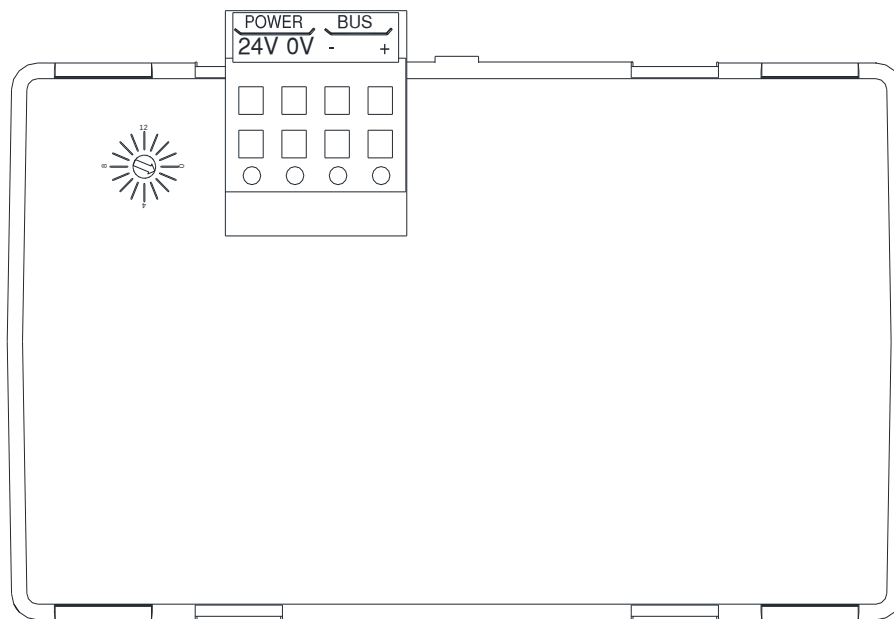


GROUP 1 GROUP 2 GROUP 3 GROUP 4 GROUP 5 GROUP 6 GROUP 7

WINDOW NO.


SER. NO.

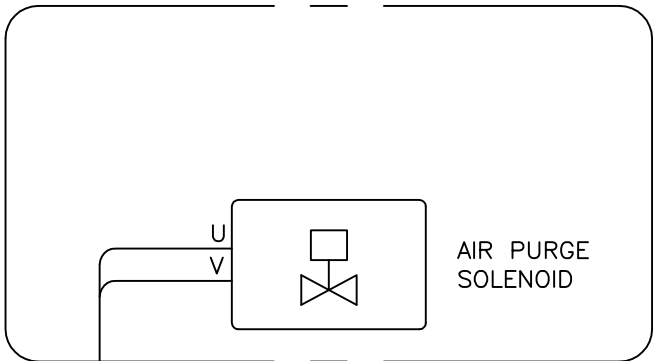


TO BE MOUNTED INTERNALLY
CLOSE TO THE SPRAY
JETS AS POSSIBLE

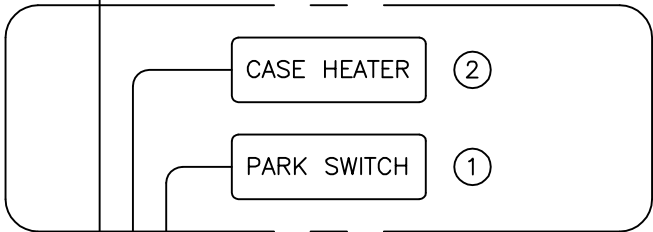

EXTERNALLY MOUNTED
(INSIDE WIPER CASE)

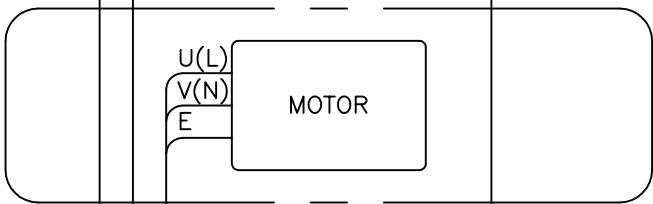

INTERNALLY MOUNTED

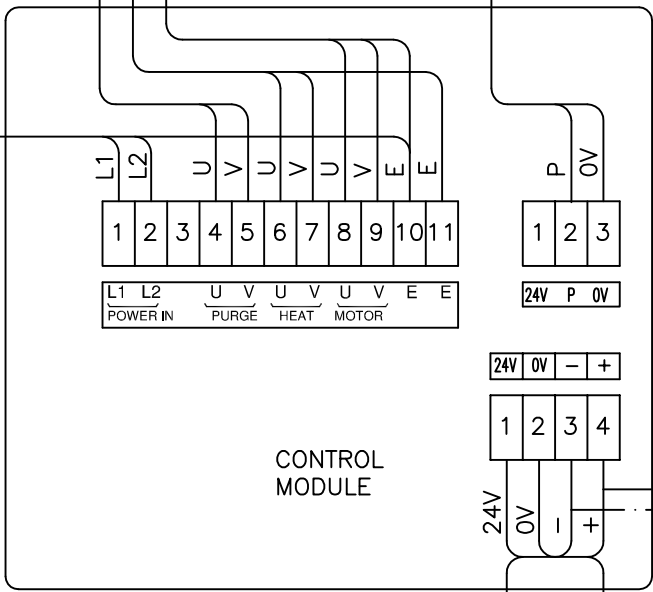

TERMINATION
RESISTOR
MODULE

LAST MODULE ONLY

61\$\$\$01010E**

TO NEXT
MODULE


CABLES SUPPLIED AS STD
① ②
ALL OTHER CABLES ARE
CUSTOMER SUPPLIED

FUSED SHIPS
SUPPLY


FROM KEYPANEL
OR MODULE

WINDOW NO.


SER. NO.

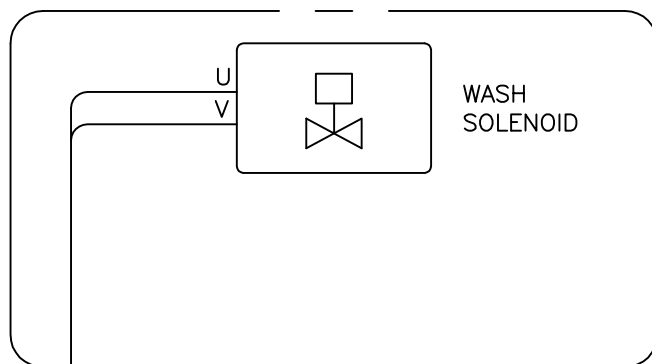

TO BE MOUNTED INTERNALLY
CLOSE TO THE SPRAY
JETS AS POSSIBLE

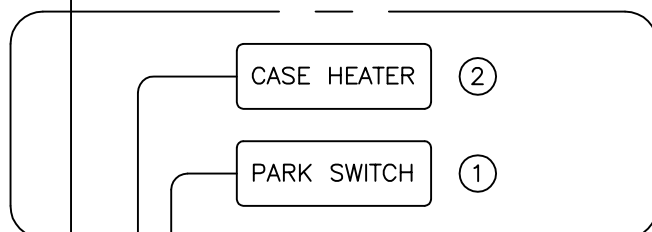

EXTERNALLY MOUNTED
(INSIDE WIPER CASE)

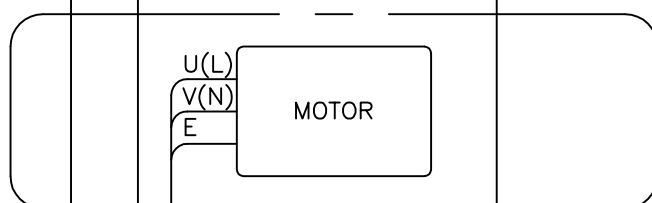


INTERNALLY MOUNTED

CABLES SUPPLIED AS STD

① ②

ALL OTHER CABLES ARE
CUSTOMER SUPPLIED

FUSED SHIPS
SUPPLY

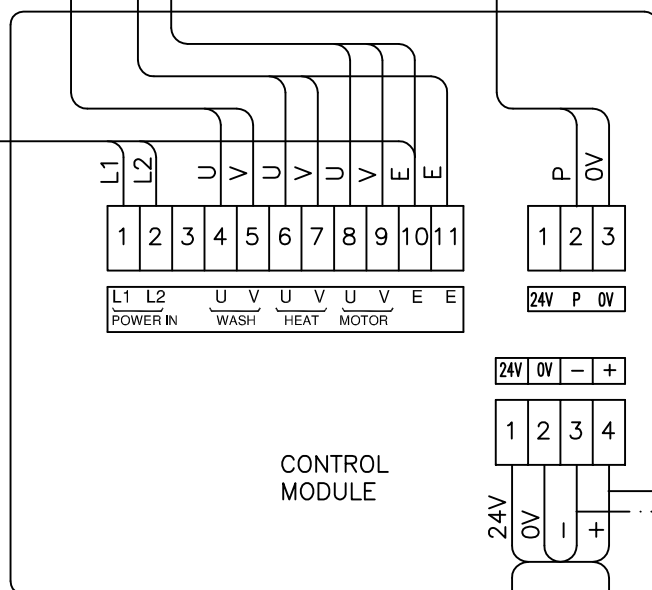



TERMINATION
RESISTOR
MODULE

LAST MODULE ONLY

FROM KEYPANEL
OR MODULE

61\$\$\$10010E**

TO NEXT
MODULE

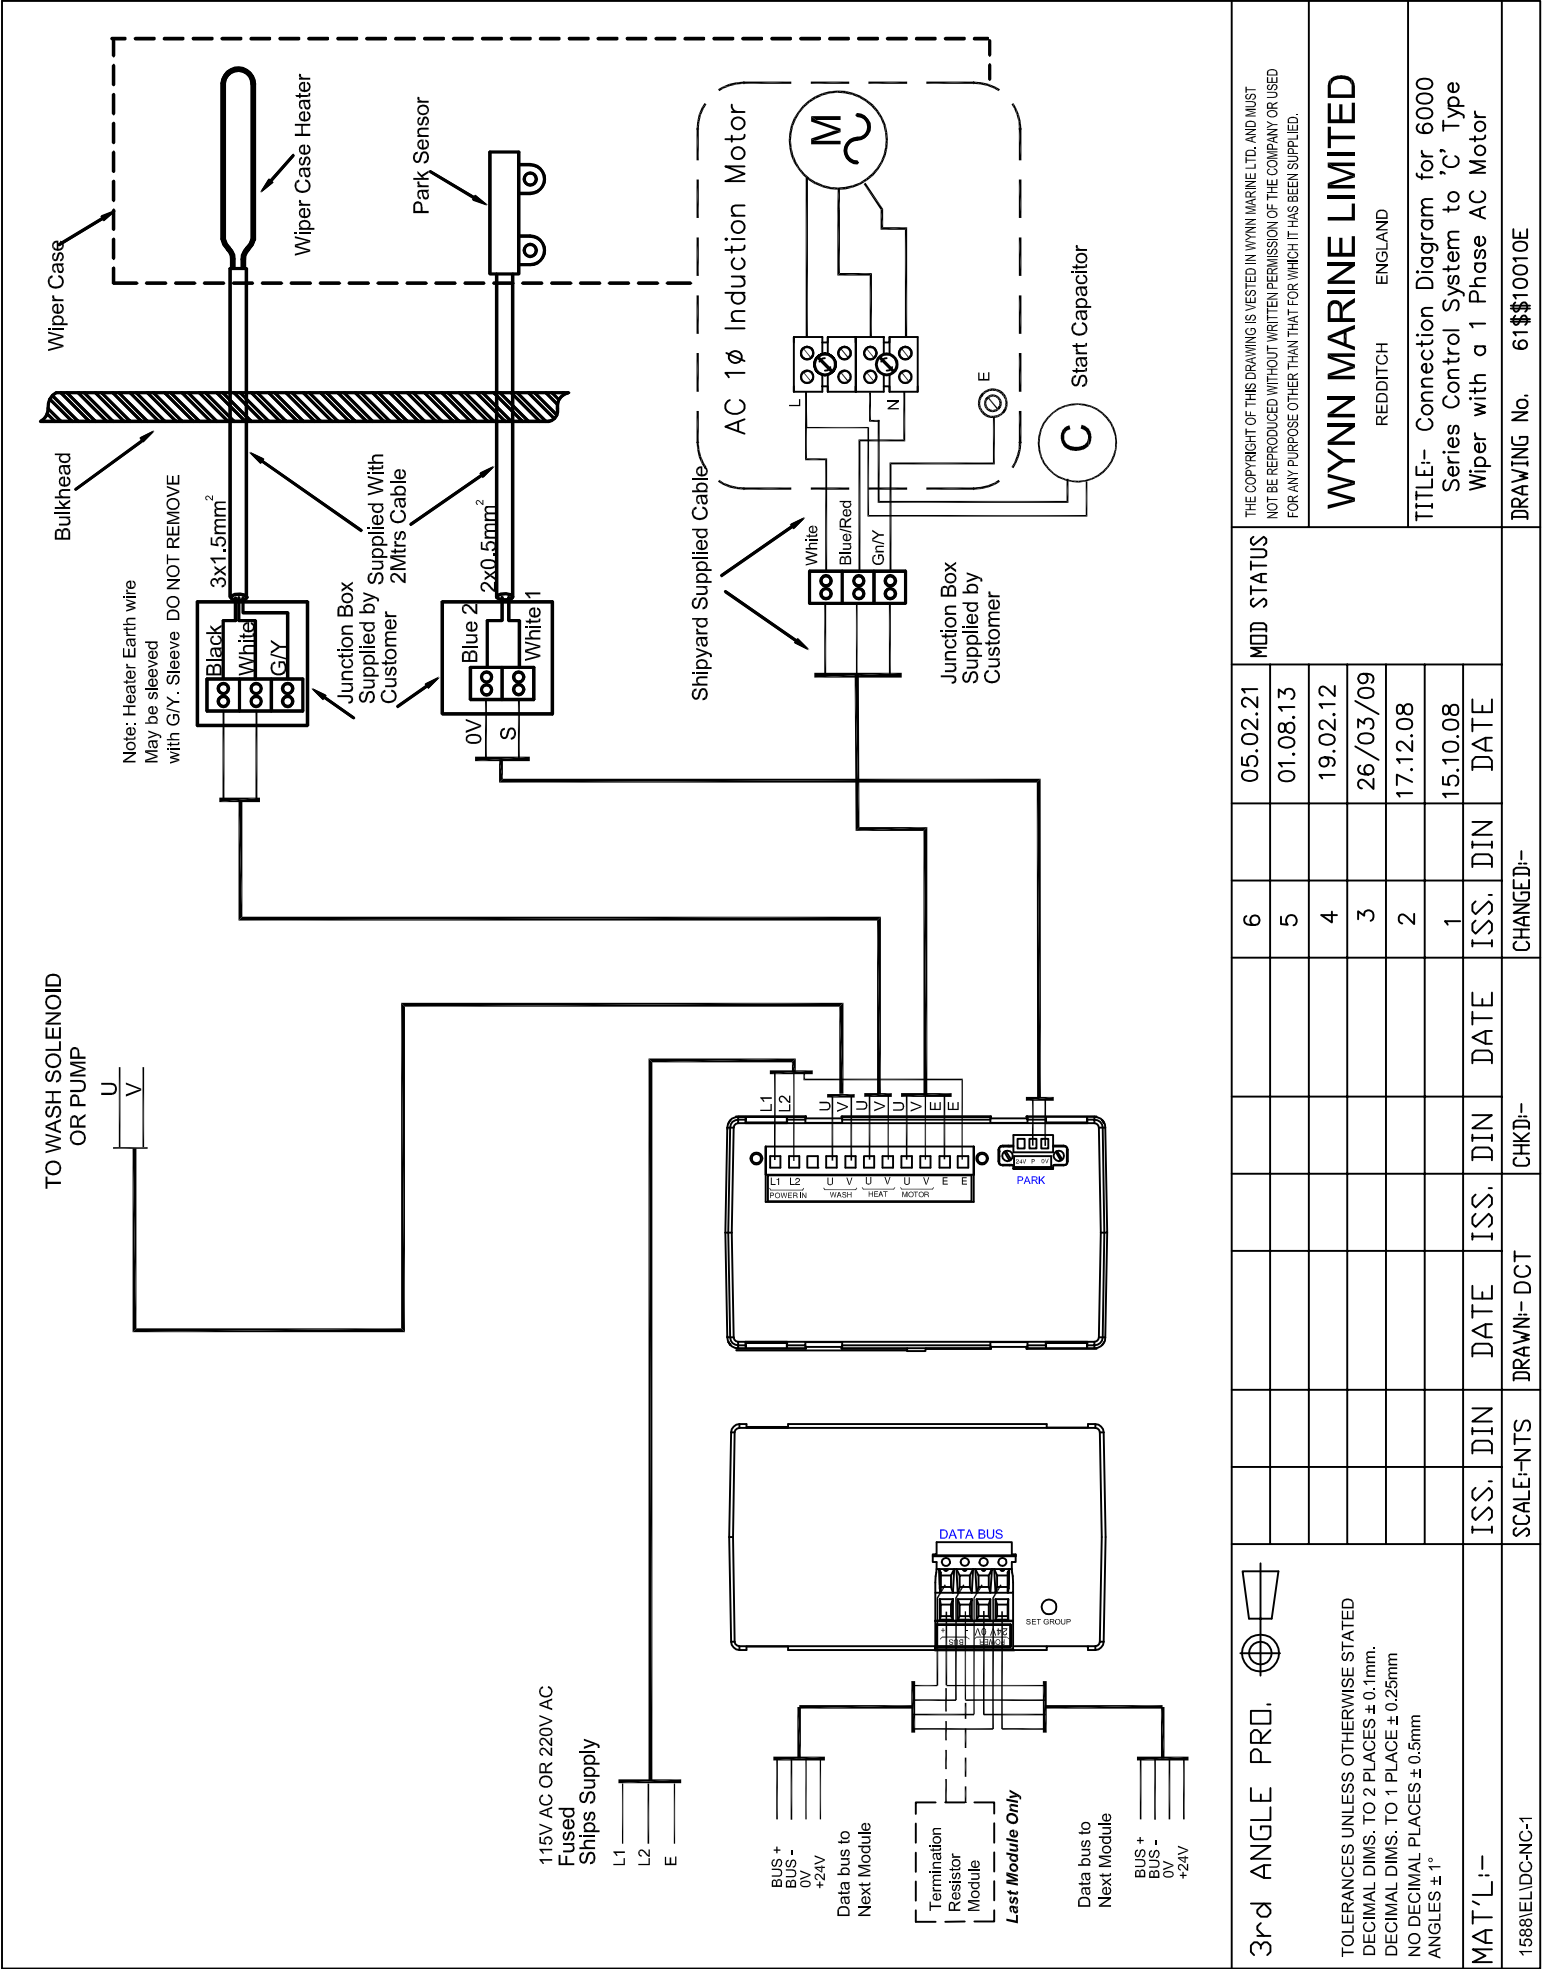

3rd ANGLE PRO.

TOLERANCES UNLESS OTHERWISE STATED
DECIMAL DIMS. TO 2 PLACES ± 0.1mm.
DECIMAL DIMS. TO 1 PLACE ± 0.25mm
NO DECIMAL PLACES ± 0.5mm
ANGLES ± 1°

MAT'L:-

1588/EL/DC-NC-1

MOD STATUS

ISS.	DIN	DATE	ISS.	DIN	DATE	CHKD:-	DRAWN:-	DCT	SCALE:-	NTS
			6		05.02.21					
			5		01.08.13					
			4		19.02.12					
			3		26/03/09					
			2		17.12.08					
			1		15.10.08					

CHANGED:-

THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.

WYNN MARINE LIMITED
REDDITCH ENGLAND

TITLE:- Connection Diagram for 6000 Series Control System to 'C' Type Wiper with a 1 Phase AC Motor

DRAWING No. 61\$\$\$10010E

WINDOW NO.

SER. NO.

CABLES SUPPLIED AS STD

① ②


ALL OTHER CABLES ARE
CUSTOMER SUPPLIED

INTERNALLY MOUNTED


FUSED SHIPS
SUPPLY

FROM KEYPANEL
OR MODULE




61\$\$\$11011E**

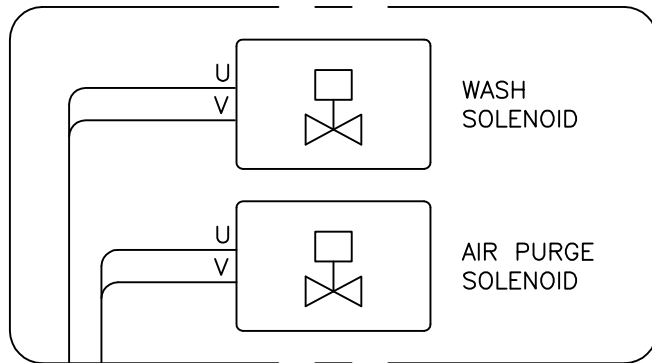

TO BE MOUNTED INTERNALLY
CLOSE TO THE SPRAY
JETS AS POSSIBLE

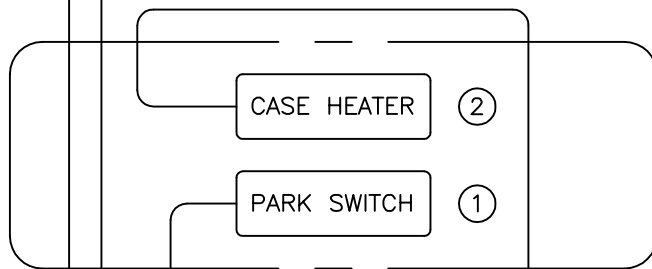

EXTERNALLY MOUNTED
(INSIDE WIPER CASE)

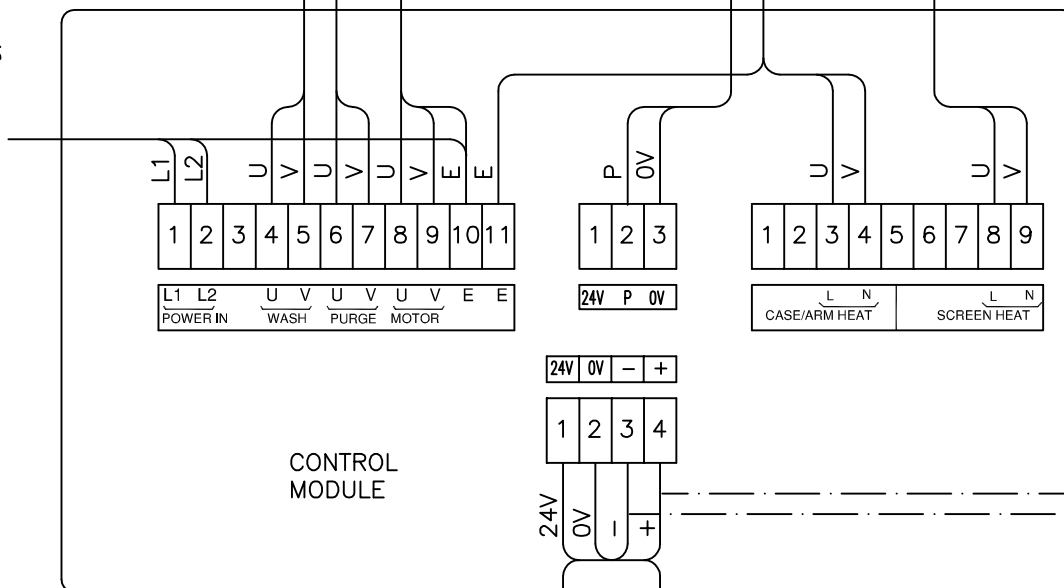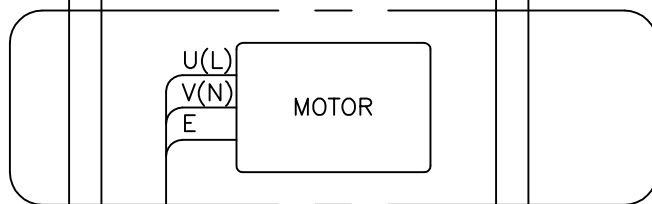


TO NEXT
MODULE

WINDOW NO.

SER. NO.

Ships Supply Voltage



AIR PURGE SOLENOID

TO BE MOUNTED INTERNALLY
CLOSE TO THE SPRAY
JETS AS POSSIBLE

CASE HEATER

②

PARK SWITCH

①

EXTERNALLY MOUNTED
(INSIDE WIPER CASE)

CABLES SUPPLIED AS STD


① ②

ALL OTHER CABLES ARE
CUSTOMER SUPPLIED




MOTOR

INTERNALLY MOUNTED

115VAC or 220VAC
FUSED SHIPS
SUPPLY

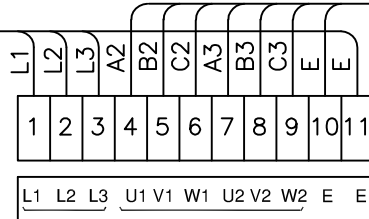


CONTROL
MODULE



FROM KEYPANEL
OR MODULE

63\$\$\$01010E**


TO NEXT
MODULE

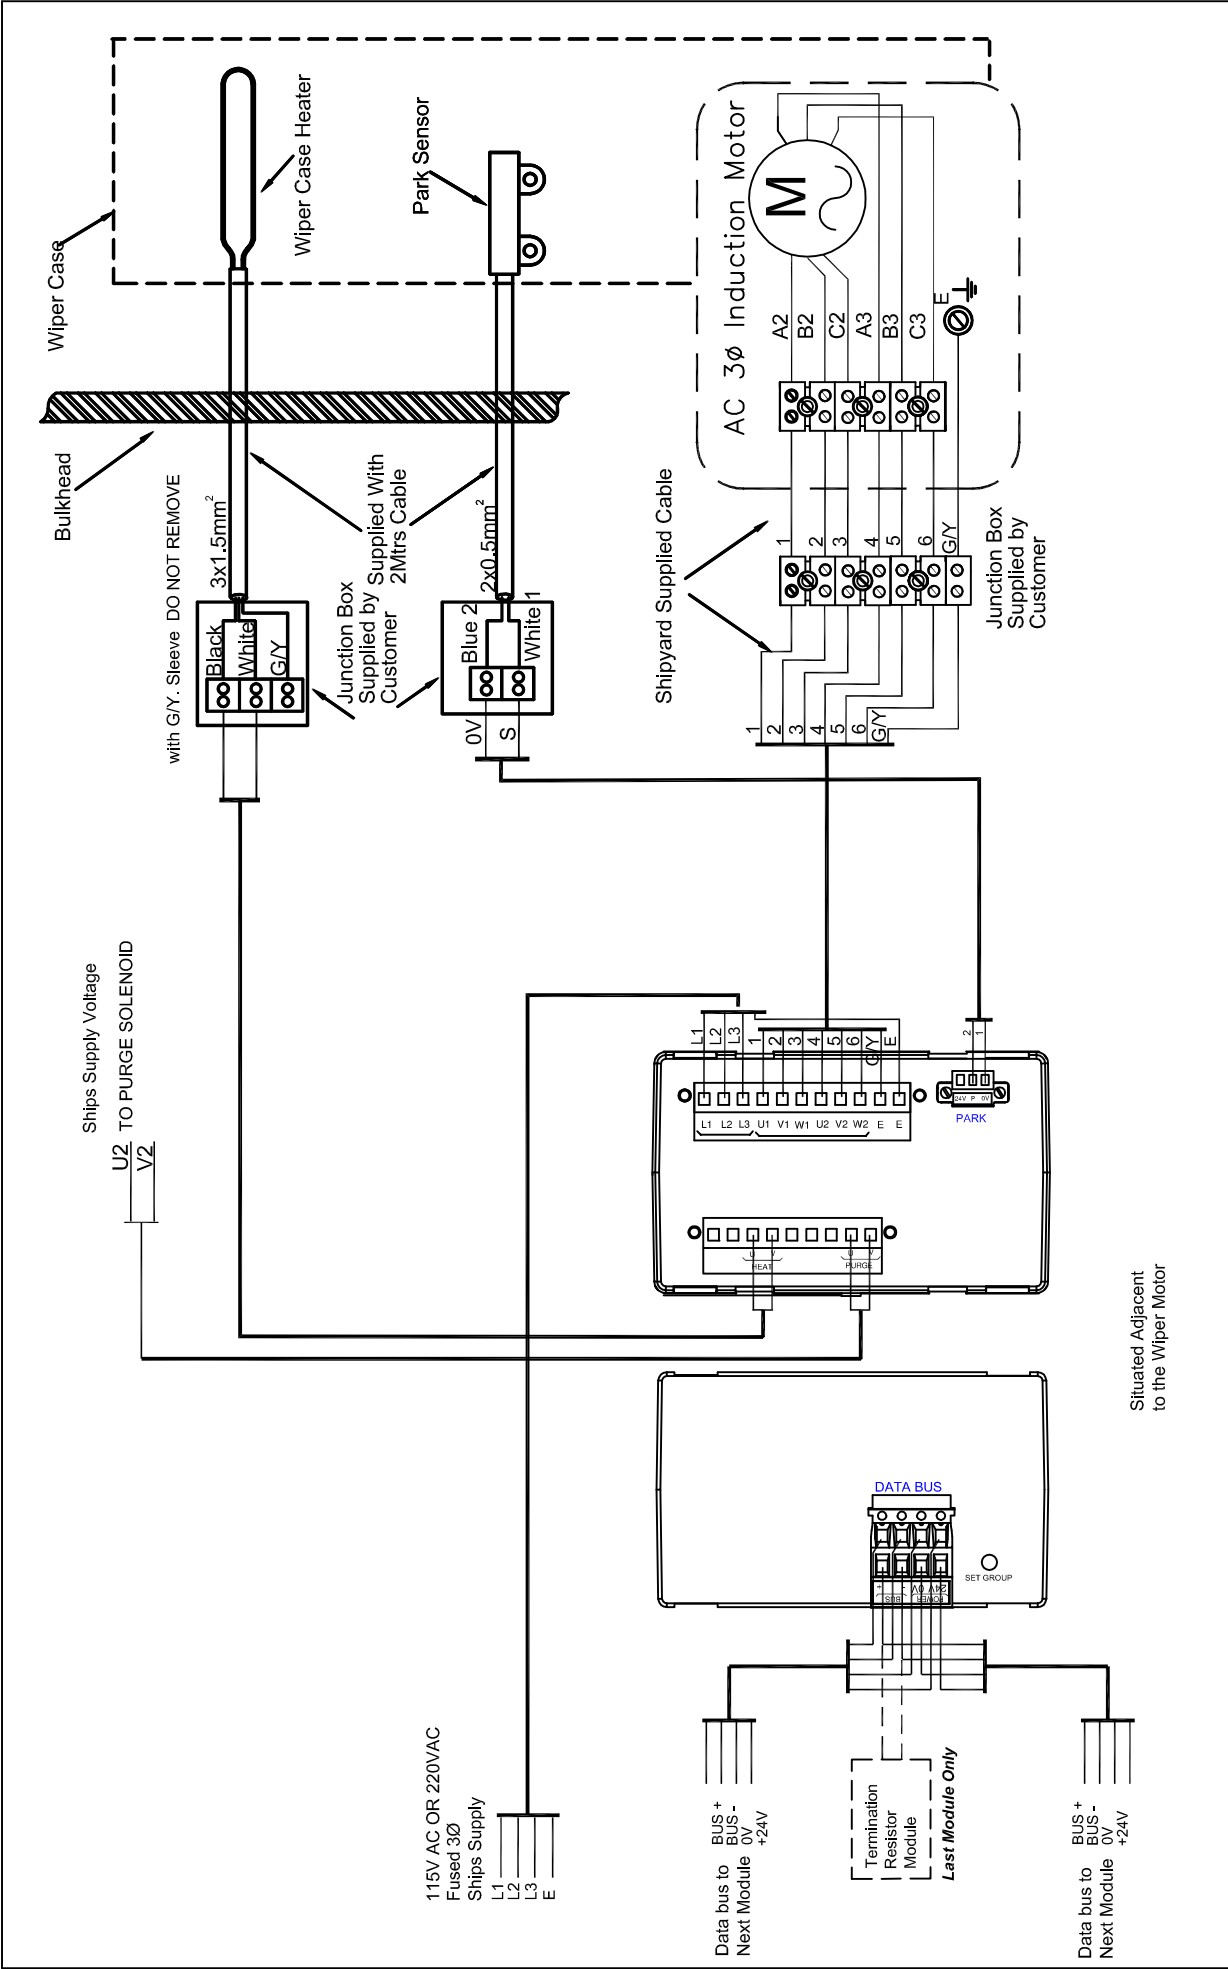

3rd ANGLE PRO.	THE COPYRIGHT OF THIS DRAWING IS VESTED IN WYNN MARINE LTD. AND MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION OF THE COMPANY OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT HAS BEEN SUPPLIED.									
	WYNN MARINE LIMITED REDDITCH ENGLAND									
	TITLE:- Connection Diagram for 6000 Series Control System to 'C' Type Wiper with a 3 Phase AC Motor									
	DRAWING No. 63\$\$\$01010E									
	cad file:- 6000\EL\6030\C-i1									
TOLERANCES UNLESS OTHERWISE STATED DECIMAL DIMS. TO 2 PLACES ± 0.1mm. DECIMAL DIMS. TO 1 PLACE ± 0.25mm NO DECIMAL PLACES ± 0.5mm ANGLES ± 1°	MOD STATUS									
	05.02.21									
	19.02.12									
	19/12/11									
	26/03/09									
MAT'L:-	15.12.08									
	16.10.08									
	ISS. DIN DATE ISS. DIN DATE									
	SCALE:- NTS DRAWN:- DCT									
	CHKD:- CHANGED:-									

WINDOW NO.

SER. NO.

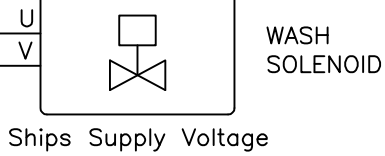

TO BE MOUNTED INTERNALLY
CLOSE TO THE SPRAY
JETS AS POSSIBLE

CASE HEATER

②

PARK SWITCH

①

EXTERNALLY MOUNTED
(INSIDE WIPER CASE)

CABLES SUPPLIED AS STD


① ②

ALL OTHER CABLES ARE
CUSTOMER SUPPLIED




MOTOR

INTERNALLY MOUNTED

115VAC or 220VAC
FUSED SHIPS
SUPPLY

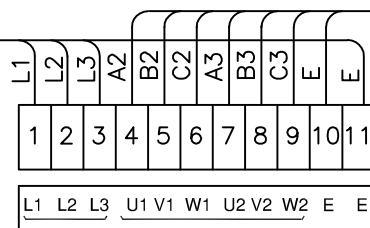

CONTROL
MODULE




LAST
MODULE
ONLY

FROM KEYPANEL
OR MODULE

63\$\$10010E**

TO NEXT
MODULE

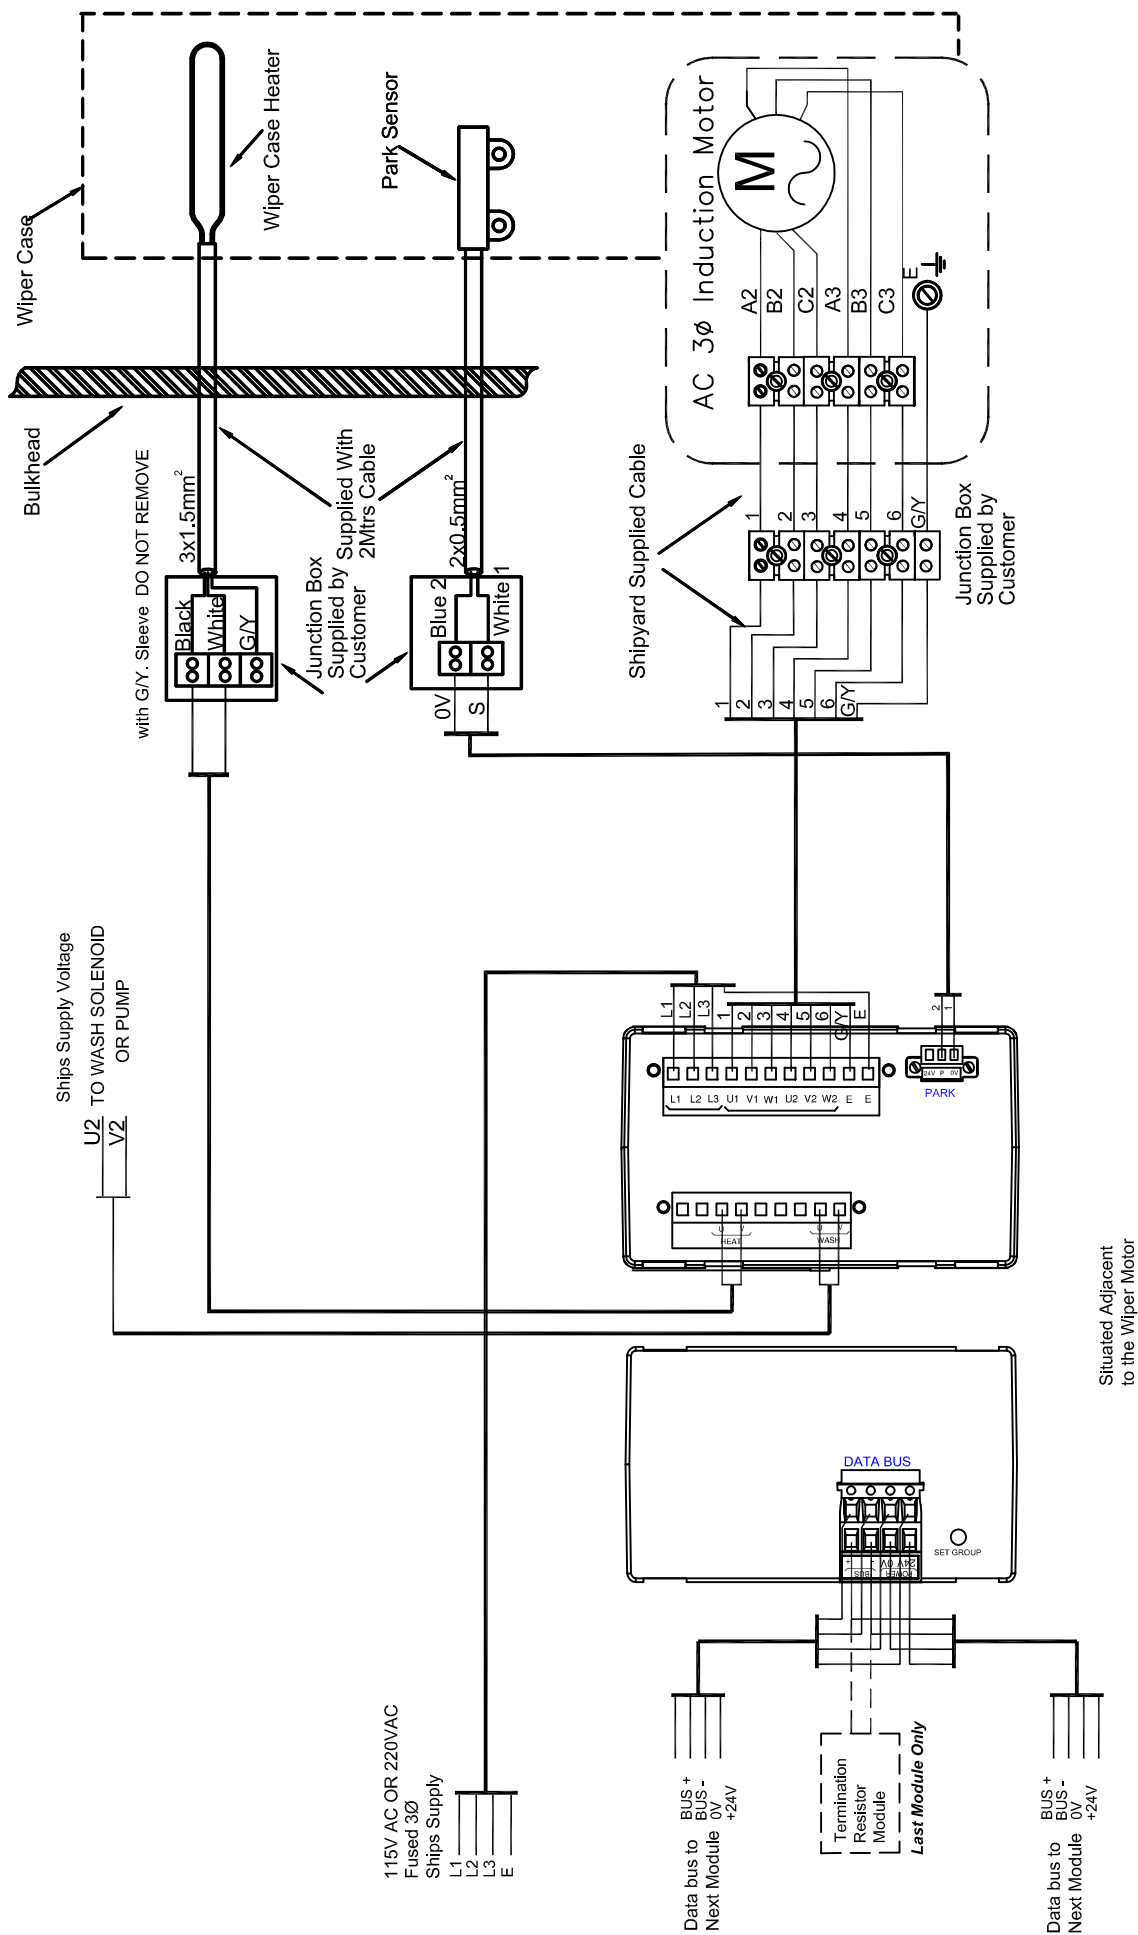

3rd ANGLE PRO. 										MOD STATUS											
TOLERANCES UNLESS OTHERWISE STATED DECIMAL DIMS. TO 2 PLACES ± 0.1mm. DECIMAL DIMS. TO 1 PLACE ± 0.25mm NO DECIMAL PLACES ± 0.5mm ANGLES ± 1°																6		19/12/11			
																		5		26/03/09	
																			4		26/01/09
																			3		21.07.08
																			2		19.10.04
MAT'L:--																1		6.7.04			
										ISS.	DIN	DATE	ISS.	DIN	DATE	ISS.	DIN	DATE			
cad file: - 6000\EL\6030\C-i1										SCALE:-NTS		DRAWN:- DCT		CHKD:-		CHANGED:-					
																DRAWING No. 63\$\$\$10010E					

SERIES 6000 FAULT FINDING



WARNING: Ensure that all power is disconnected whilst working on the controller.


The controller contains no user serviceable items.

In the event of a fault, verify the following:


1. The green power backlighting on the keypad is on, showing 24V is present.
2. Other wipers within the group are working, showing that the problem is not a system problem.
3. Verify that fuses or circuit breakers (customer supplied) have not blown.
4. Verify connections have not become loose.
5. Verify the wiring to the module is correct as per installation drawings (initial installation only).
6. Check that the bus supply (24VDC) and motor supply voltages (115/220VAC) are present at the module.
7. Verify Group settings are correct (initial installation only – once installed these are fixed).
8. Modules may be swapped only if they are from a wiper of the same motor type (CA, CB, CH, CJ, CM) otherwise the onboard software fuse may not adequately protect the system, or it may trip the system unnecessarily. Note position of the front panel rotary switch on both modules. Ensure the replacement module is set to the same value as the module under test. The 24 V supply needs to be turned off and on again each time a switch change has been made.
9. If the fault still exists when a known working module has been installed it may be that the software fuse has been activated and is protecting a faulty motor/heater/solenoid valve/wiring. Use the following check list:-
 - a) Using a meter check the voltage on the motor output (Between each phase), this should be the same as the supply voltage.
 - b) If no power is present at the output terminals of the control module, or is only present for a short period of time, disconnect the motor and measure again.
 - c) If voltage is now present then there is a problem with the motor or a short in the wiring.
 - d) Using a meter check the voltage on the relevant auxiliary output (heater/wash solenoid/purge solenoid), this should be the same as the supply voltage in a module with a '1' in the code.
 - e) If no power is present at the output terminals of the control module, or is only present for a short period of time, disconnect the output device and measure again.
 - f) If voltage is now present then there is a problem with the output device or a short in the wiring (there may be a voltage reading on outputs on the secondary board with no device connected or button pressed on the keypad, this is normal, the voltage should rise when the relevant button is pressed on the keypad).

3000-006 PSU

MOUNT USING 35mm X 7.5mm TOP HAT DIN RAIL

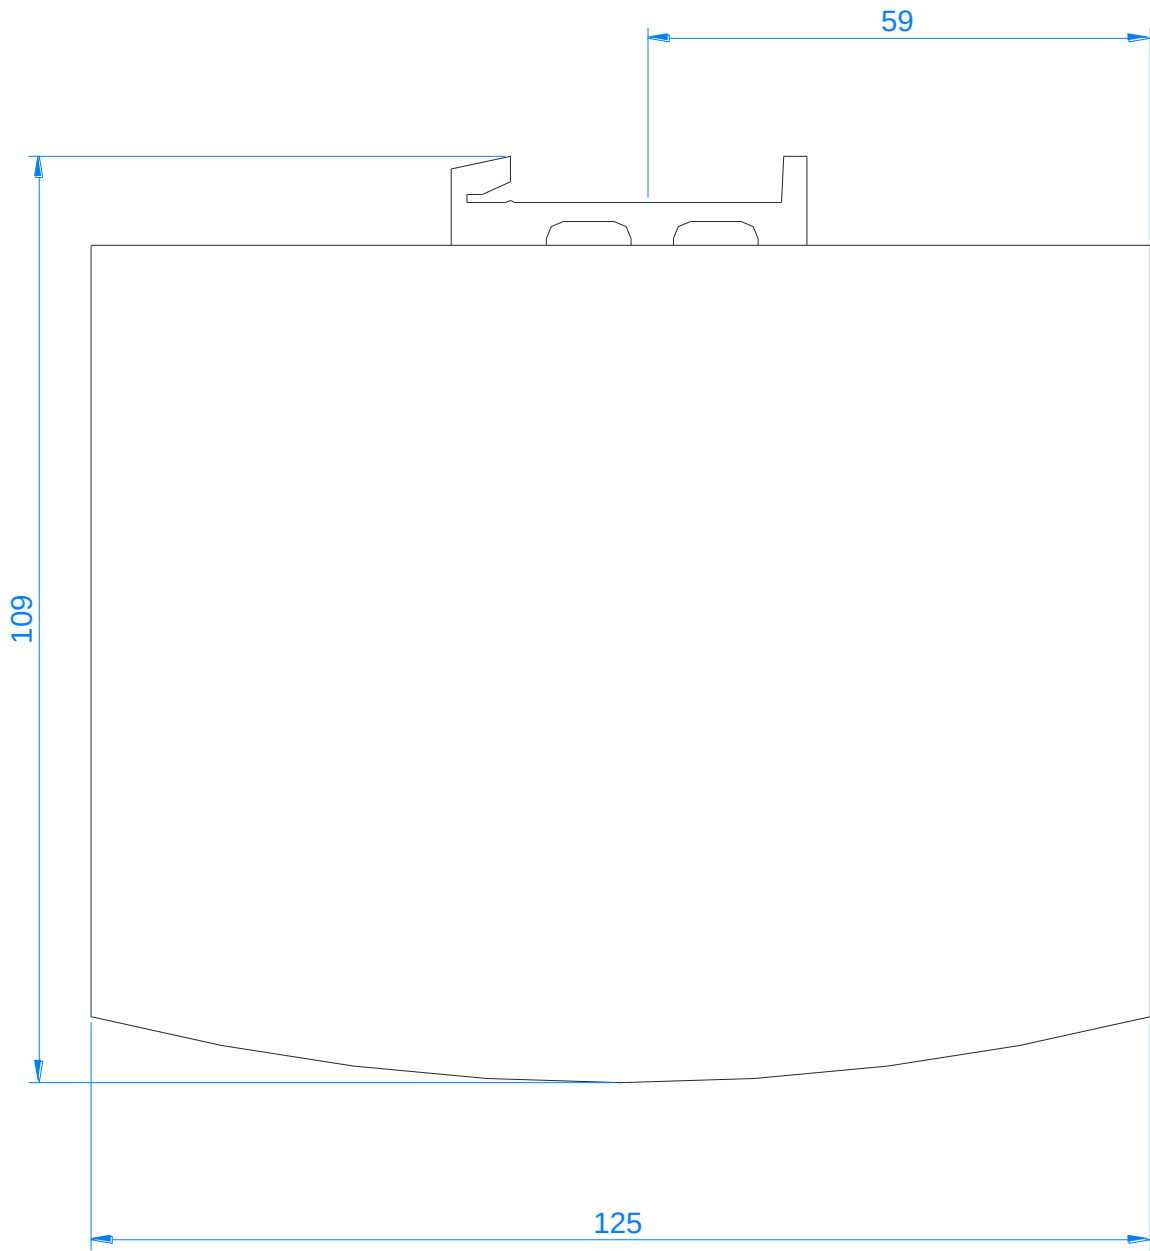

OUTPUT: 24VDC 3.2A

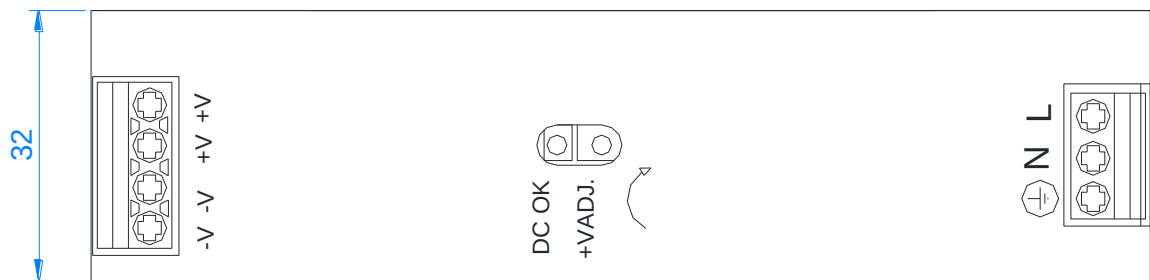

INPUT: 90-264VAC
1.45A/115VAC 0.9A/230VAC

DOCUMENTATION

Whilst every effort is made to provide accurate information in good faith, no responsibility can be accepted by Wynn for inaccuracies and Wynn reserves the right to alter and amend specifications and designs without prior notice in line with our policy of continued improvement.

Spares Parts

To enable technical troubleshooting and ordering of spare parts, this manual should be kept in a safe place on board. It is also advisable to keep one set of spare parts on board for emergency use. Please contact Wynn directly or your local distributor / service centre for all order requirements.

Maintenance Schedules

Plan your maintenance work according to the schedule in this manual.

Our Commitment

We are committed to a 10 year product support programme. This ensures that any spare part will be available for any wiper at least 10 years after its purchase. It is strongly recommended that only genuine replacement parts manufactured by WYNN be used. This will guarantee that only suitable materials have been used and will ensure interchangeability of parts.

Quality and Testing

We are committed to the principles of Total Quality Management, ISO 9000. We manufacture our range of marine products to the highest standard and quality. We therefore maintain an ongoing schedule of product improvement and testing. To help us sustain such standards we maintain a salt-water test rig on which our products are taken, at random from the production line, and subjected to 3,000 hour continuous testing. We are sure you will receive many years trouble-free service from your Wynn product and hope you find this information pack comprehensive.

Guarantee

All Wynn equipment is tested before despatch from our works. The Windscreen Wiper System supplied has a 1 year warranty period provided the installation of the system and the subsequent maintenance is in accordance with the installation/maintenance instructions.

We cannot accept any responsibility for the installation of equipment, or damage to the equipment during installation, or normal wear and tear. The guarantee is negated if the equipment is not installed strictly observing the instructions set out in this manual, or not maintained as specified.

The Wiper System is very reliable but to ensure its continued smooth running we recommend that the following guidelines are adhered to:-

Monthly

- Check for wear on all parts subject to friction
- Visual inspection should be made of the blades to ensure that they are still in good condition and replace as soon as there are signs of wear or damage

Annually

- It is recommended that the blades are changed every 12 months

After the Wiper System has been operating in severe weather conditions it is advisable to thoroughly check the unit for signs of wear or damage.

This warranty excludes the wiper blades which are a consumable item and any replacements that are detailed in the manual as part of any regular maintenance requirement.

This guarantee is expressly in lieu of all other guarantees expressed or implied and of all other obligations or liabilities on our part, and we neither assume nor authorise any other person to assume for us any other liability in connection with the sale of our equipment. Faulty equipment must be returned, carriage paid, to our works for examination. Any legal action must be settled in the English courts under English law.

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

A worldwide network of agents supports Wynn's Marine product range. For details of the nearest Wynn agent please contact our Head Office. Wynn Agents operate in the following countries.

Algeria, Argentina, Australia, Brazil, Bulgaria, Canada, Chile, China, Columbia, Croatia, Denmark, Egypt, Estonia, Finland, France, Germany, Greece, Hong Kong, Iceland, India, Israel, Italy, Japan, Latvia, Lithuania, Netherlands, New Zealand, Norway, Peru, Portugal, Romania, Russia, Singapore, South Africa, South Korea, Sweden, Taiwan, Thailand, Turkey, UAE, U.S.A.



Wynn Marine Ltd

2-4 Merse Road, North Moons Moat, Redditch, Worcestershire B98 9HL

Tel: +44 (0) 1527 61243, Fax: +44 (0) 1527 66836

Email: customerservice@b-hepworth.com, website www.b-hepworth.co.uk